



Product Catalogue



Simple. Reliable. Profitable.

An Introduction to AMC Baltic

Wherever you go, whatever public facility you visit,
a good, reliable sound system is essential.

OUR CREDO

With over 10 years of experience, AMC Baltic® provides the best possible solutions and redefines the benchmark for affordable commercial sound equipment. Specializing in Public Address and other commercial audio applications, the AMC product range covers the needs of even the most demanding of users and applications.

Simplicity

All of our products are easy to install and use. Because of the flexibility of our housings, loudspeakers can be quickly and easily installed into ceilings or walls. Many of our devices (such as loudspeakers, amplifiers and preamplifiers) use Phoenix connectors which makes it easy to connect our equipment, without any special tools and this saves on installation time. Our products blend into a wide variety of contemporary interiors and become an integral part of the architecture. For simplicity, the main controls of the electronic equipment are located in the front panel and are marked by clearly understandable symbols, while the control elements for professional use are located in the rear. We help installers by printing the main technical parameters on the product box and label, making selection and installation easier and avoids mistakes. Our professional audio music players will play files from USB flash and SD memory media.

Reliability

Our products will give consistently great results, even if used 24/7. Simplicity of design, using only premium moving part components, gives our product range the edge in reliability. Loudspeaker enclosures are produced from high quality ABS plastic. Amplifiers and players are extremely resistant to dust and high temperatures and overload protection circuits are built into almost every device. All of this, combined with a rarely called-upon guarantee, gives the consumer total peace of mind. Our 10 years experience of providing professional engineering solutions enables us to deliver the most reliable devices to the audio industry. Our products are equally comfortable inside or outside a building; they are capable of being driven hard anywhere. We know this because we constantly test them in the lab and in the real world.

Profitability

We are able to maintain an exceptional price-to-quality ratio by selling in large quantities, thus enabling our costs to be more competitive when compared to our rivals. Because of this sales structure, together with a fantastic product range that offers a complete solution, we are more attractive to big installation and construction companies. Ultimately, we save our customers money. For the dynamically developing audio market AMC Baltic is able to offer a continuously updated portfolio of products, which provides an advantage to our distributors in the competitive marketplace.

Whilst every effort has been made to ensure that the information in this catalogue is correct, we accept no liability in respect of errors or omissions. All specifications within the AMC Product Catalogue are subject to change as products are updated.





ABOUT US

AMC Baltic started in January 2008, as a manufacturer of loudspeakers and electronics.

Since 2000, AMC had been known as a leading brand in the audio industry. It is a modern and flexible company, operating in this highly competitive international market. Our prime target is the contractor market. We provide reliable, high quality, simple and competitively priced products, and our main focus is on the public address and voice evacuation markets. These markets

demand big quantities and a fast delivery times. You can order thousands of loudspeakers from us and they will usually be in stock; immediate shipment means they reach our customers soon after. Today we sell to 30 countries worldwide, and you can see our products with the AMC logo in many prestigious buildings around the globe.

Case Studies & Environments

We sell to 35 countries worldwide. Some of our customers are:
 Abiss, Audiologic, Audio Integrate, AVR, BLC Turva, Digital Emotions, Esistemas, GVI Vertriebs, Honeywell, Imlight Showtechnic, Jazz-Club, Karadag Elektronik, Last Inc., Linearic, Norsk Lydteknikk, Novar, Proeling, Promedias, Sisme, Starfelt, Technology Innovated Distributio & V. V. & Sons Company




Zalgiris Arena

The largest 15.000 capacity Sport and Entertainment arena in the Baltic states, located in Kaunas, Lithuania.



Eurovea

The most sophisticated retail, residential, office and leisure center in Central Europe, Bratislava, Slovakia.



Resurrection Church

The famous monumental Roman Catholic church with awesome panoramic view of city Kaunas, Lithuania.



Veli Vrh

The modern new primary school in Pula, Istria, Croatia.




Druskininkai Aquapark

The largest and most impressive water park in the Baltic states.



Europa

The shopping mall with fashion and style. It is dynamic and elegant, comfortable and cozy.




Hotel Central

Newly renovated hotel in excellent location in old city of Bucharest, Romania.



Holiday Inn Vilnius

Voted one of the best hotels within more than 600 Intercontinental Hotels Groups.



Skating Rink

The king of all outdoor rinks! The ice rink covers more than 3000m² and is located in the heart of Moscow in Red Square.



IKEA Vilnius

First IKEA shopping centre in Baltic states opened in 2013.



Novotel Vilnius Centre

The hotel in the historic and commercial heart of Vilnius, Lithuania.



Zara - Vilnius

One of the largest international fashion companies with hundreds of shops around the globe.

Our products are used across many sectors in a variety of architectural environments.

Houses of Worship

Churches, Mosques, Temples, Cathedrals and Synagogue's

Transportation Hubs

Airports, Ferry Ports, Train and Bus Terminals

Public Galleries

Museums, Aquariums, Art and Exhibition Centres

Halls of Education

Libraries, Schools, Colleges and University Campus

Retail

Outlets, Supermarkets and Shopping Centers

Food & Drink Establishments

Cafés, Pubs, Bars, Coffee Houses and Restaurants

Corporate AV

Factories, Offices, Boardrooms and Conference Facilities

Public Accomodation

Hotels, Motels, Inns and Boarding Houses

Sporting & Leisure

Stadiums, Arenas, Gyms, Rinks, Pools & Sport Centres

Entertainment

Music Venues, Theaters, Cinemas and Auditoria

Health & Beauty Institutes


Surgeries, Hospitals, Medical Centres and Spa's

Manufacturing, Testing & Distribution

AMC products are recognizable in many prestigious building

OUR PRODUCTS

We design and produce products dedicated to the public address and voice evacuation markets. Millions of loudspeakers and thousands of electronic devices with the AMC logo are installed in locations all around the World. Their function enables voices and music to be heard clear and pure, without creating an unpleasant or invasive audio environment.

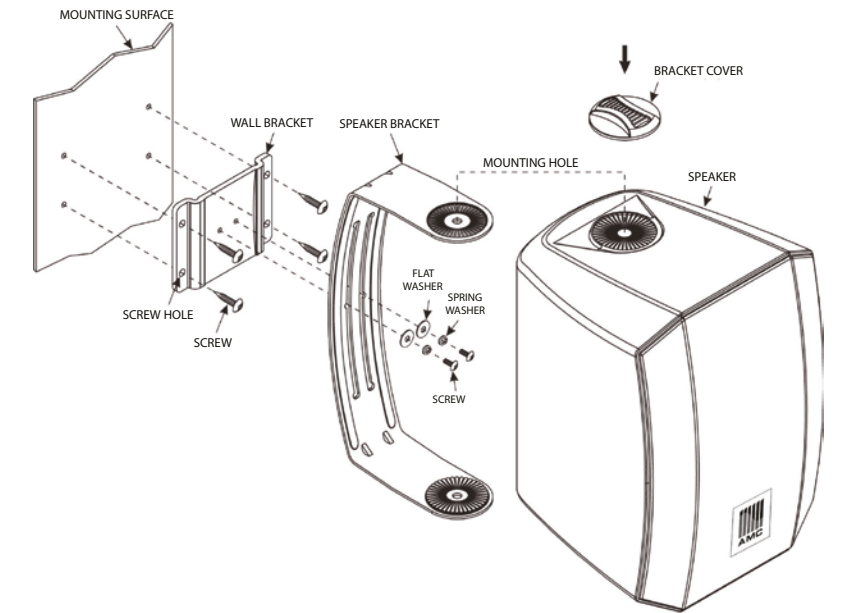


Quality of Build

We use only the highest quality components we have selected for inclusion in our build process, since we consider this to be of the greatest importance to the product, and the end user. We control and monitor assembly of the product at every stage and use high quality tools and hardware in the process.



Quality Control

From sourcing of the raw materials to manufacture of the final products, we take special care about the product control. The materials we use in our electronic units are subject to the most stringent requirements in terms of both specification and quality. We ensure that components are ROHS compliant. Throughout the production process we examine and test the quality of our products. Then, the product is finally tested and examined through our high-spec laboratories.

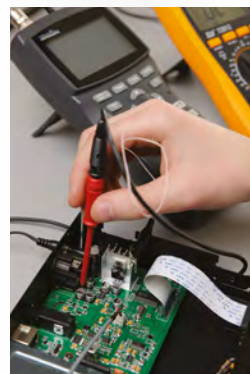

Stock Control

It is most important for us that the product will be in stock, the last stage before reaching the buyer. We control incoming product quality and ensure the best storage conditions and quantity control. Our products are kept safely in a modern warehouse, where the process of paperwork and collecting the shipments is automated using a bar code control system.



Installation

During the product development and production we always consider the installers, those who will affix and commission our products on site. We always ensure that our products are user-friendly and easy to install.



Our Range

We have a very wide range of the products across two main lines. Loudspeakers: ceiling, wall mount, horn speakers, sound projectors and spherical speakers. Electronics: preamplifiers, players, amplifiers, wireless and wired microphones.





Rooms
with a **View**

LOUDSPEAKER INDEX

CABINET LOUDSPEAKERS

iPlay 4T, 5T & 6 Wall Mount Plastic Loudspeakers	12-13
iSpeak 5 Surface Mount Loudspeakers	14
iSpeak 6 Surface Mount plastic loudspeakers.....	15
PS 6 Surface Mount Plastic Loudspeakers	16
EWACW 5 Surface Mount Metal Voice Evacuation Loudspeakers	17
W3 & W10 Wall Mount Plastic Loudspeakers	18
W 10RS Wall Mount Plastic Loudspeakers with Volume control	19
VIVA3-302T/VIVA3-502T Wall moun Plastic Loudspeakers	20-21
VIVA 4 Wall Mount Plastic Loudspeakers	22
VIVA 4IP Wall Mount Plastic Loudspeakers	23
VIVA 5 Wall Mount Plastic Loudspeakers	24-25
VIVA 8 Wall Mount Plastic Loudspeakers	26

CEILING LOUDSPEAKERS

MC 4EN Voice Evacuation Metal Ceiling Loudspeakers	27
EVAC 5EN Voice Evacuation Metal Ceiling Loudspeakers	28
EVAC 5 Voice Evacuation Metal Ceiling Loudspeakers.....	29
EVAC 50X Voice Evacuation Metal Ceiling Loudspeakers.....	30
EVAC 6 Voice Evacuation Metal Ceiling Loudspeakers.....	31
MC 4TA & MC 5T Metal Ceiling Loudspeakers	32-33
MC 6T Metal Ceiling Loudspeakers	34
PC 3 Plastic Ceiling Loudspeakers	35
PC 4HP High Performance Plastic Ceiling Loudspeakers	36
PCR 5T & PCR 8T Rimless Plastic Ceiling Loudspeakers	37
PC 5T & PC 8T Plastic Ceiling Loudspeakers	38-39
PC 5TX & PC 8TX Plastic Ceiling Loudspeakers	40-41
PC 6T Plastic Ceiling Loudspeakers.....	43

LOW IMPEDANCE LOUDSPEAKERS

PC 5X & PC 8X Low Impedance Ceiling Speakers.....	44-45
PC 6 Low Impedance Ceiling Loudspeakers	46
PC 6HP Low Impedance Ceiling Speakers	47
WP5 & WP6 Low Impedance Ceiling Loudspeakers	48-49

COLUMN LOUDSPEAKERS

COM 20HP & COM 30HP High Performance Column Loudspeakers.....	50-51
COM 20 & COM 40 Column Loudspeakers	52-53
COM 320 & COM 340 Column Loudspeakers	54-55
COM 420 & COM 440 Column Loudspeakers	56-57
COM SLIM 30 Column Loudspeakers	58

HORN LOUDSPEAKERS

H 15 Metal Horn Loudspeakers	60
HQ 10EN Voice Evacuation Plastic Horn Loudspeakers	61
HQ10, HQ15 & HQ30 Plastic Horn Loudspeakers	62-63
MH 50 Two-Way Plastic Horn Loudspeakers	64
MHQ 60X Two-Way Plastic Horn Loudspeaker	65

POWER CABINET LOUDSPEAKERS

POWER BOX 5 Powered Systems	66
POWER BOX 5HP Powered Systems	67

PROFESIONAL MUSIC LOUDSPEAKERS

MUSIC BOX D12 Powered Speakers	68
POWER BOX D12 Powered Speakers	69
SPEAKER BOX D12 Powered Speakers.....	70

SOUND PROJECTORS

SP 10 EN Voice Evacuation Plastic Sound Projectors.....	72
SP 10 Plastic Sound Projectors	73
SPM 20 HP High Performance Aluminum Sound Projectors	74
SPMB 10 Bi-directional Aluminum Sound Projectors.....	75
SPM 20 Aluminum Sound Projectors.....	77

SPHERICAL LOUDSPEAKERS

SL 20M Spherical Loudspeakers	78
SL 30 Spherical Loudspeakers.....	79

SUBWOOFERS

SUB 100V Passive Subwoofers	80
SUB 2 Active Subwoofers	81

VOLUME CONTROLS

VC 5R, VC 30R & VC 60R Flush Mount Volume Controls.....	82
---------------------------------------------------------	----

SPEAKER CABLES AND CONNECTORS

OFCFR 2x0.82 & OFCFR 2x1.5.....	83
TCB 2 Table Connection Box	84
AUDIO CABLES & CONNECTORS	85

LOUDSPEAKERS ACCESSORIES

MOUNTING HARDWARE	86-87
-------------------------	-------

Simple. Reliable. Profitable.

CABINET LOUDSPEAKERS

iPlay Wall Mount Loudspeakers

Plastic enclosure wall mount aluminium grill cabinet loudspeakers.

iPLAY 4T, 5T & 6


iPlay is one of our most popular lines, a good sound quality and a very keen price structure means they have many applications and are used in large quantities. The range includes 4", 5" and 6" loudspeakers with corresponding tweeters. iPlay 6 is designed only for low impedance speaker lines. Available in black and white.




Technical Specifications	iPlay 4T	iPlay 5T	iPlay 6
Rated power	30 W (8 Ω)	35 W (8 Ω)	90 W (8 Ω)
Transformer power taps	16 W - 8 W - 4 W - 2 W - 8 Ω	30 W - 16 W - 8 W - 4 W - 8 Ω	
Sensitivity	87 dB (1 W/1 m)	89 dB (1 W/1 m)	87 dB (1 W/1 m)
Maximum SPL	103 dB (Pmax/1 m) at 8137 Hz	109 dB (Pmax/1 m) at 5573 Hz	110 dB (Pmax/1 m) at 4711 Hz
Frequency response	110 Hz – 20 kHz	120 Hz – 20 kHz	70 Hz – 20 kHz
Dispersion at 1000 Hz	180° (H), 160° (V)	180° (H), 160° (V)	165° (H), 133° (V)
Driver dimensions	4" (101 mm) woofer, 1" (25 mm) tweeter	5" (127 mm) woofer, 1" (25 mm) tweeter	6" (152 mm) woofer, 1.5" (38 mm) tweeter
Dimensions	220 mm x 135 mm x 135 mm	240 mm x 165 mm x 160 mm	285 mm x 195 mm x 200 mm
Weight	1,6 kg	2,2 kg	3,2 kg
Material	Polypropylene housing with aluminum grill, U-bracket – steel	Polypropylene housing with aluminum grill, U-bracket – steel	Polypropylene housing with aluminum grill, U-bracket – steel
Colour	Papyrus white (RAL 9018) or Black (RAL 9017)	Papyrus white (RAL 9018) or Black (RAL 9017)	Papyrus white (RAL 9018) or Black (RAL 9017)

iPlay 4T



FREQUENCY RESPONSE

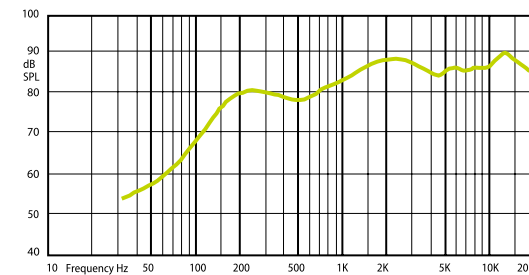

IMPEDANCE

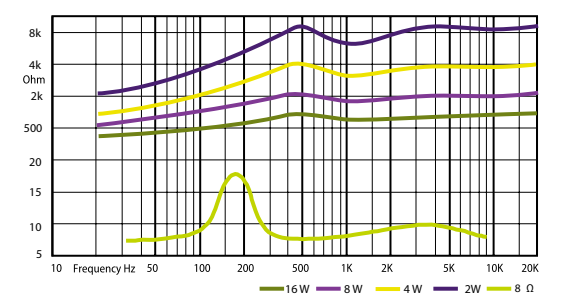


HORIZONTAL / VERTICAL POLAR DIAGRAMS

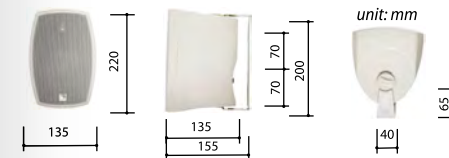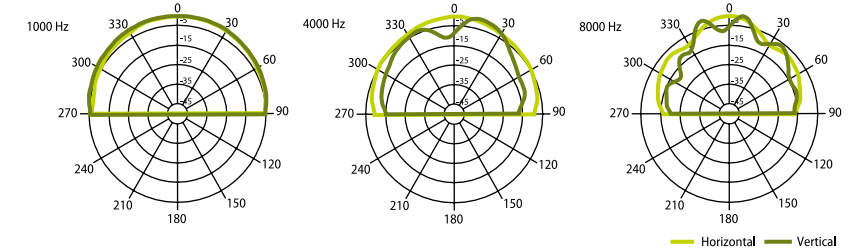


iPlay 5T



FREQUENCY RESPONSE

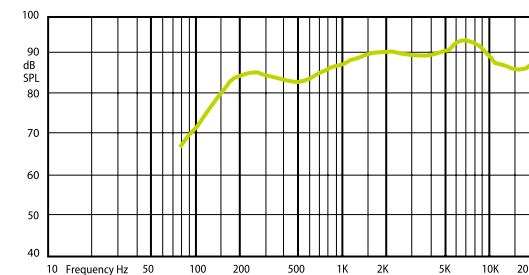

IMPEDANCE

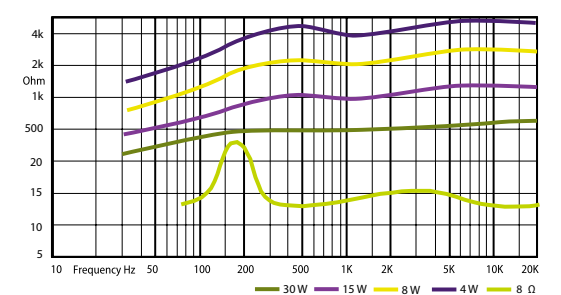


HORIZONTAL / VERTICAL POLAR DIAGRAMS

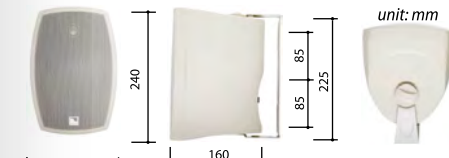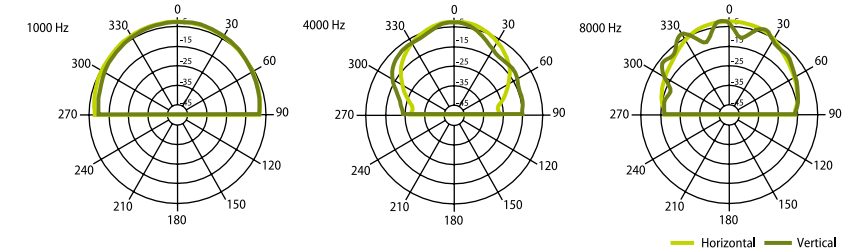


iPlay 6


FREQUENCY RESPONSE

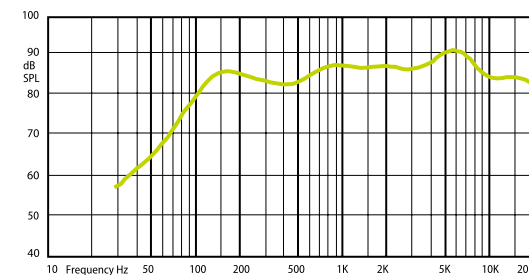

IMPEDANCE

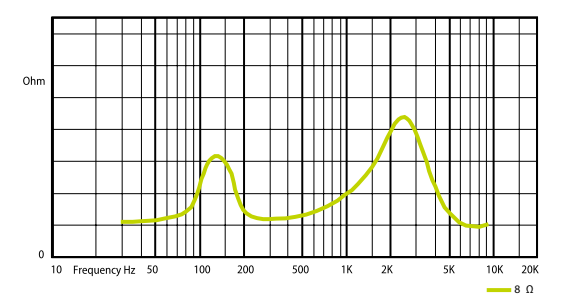

HORIZONTAL / VERTICAL POLAR DIAGRAMS

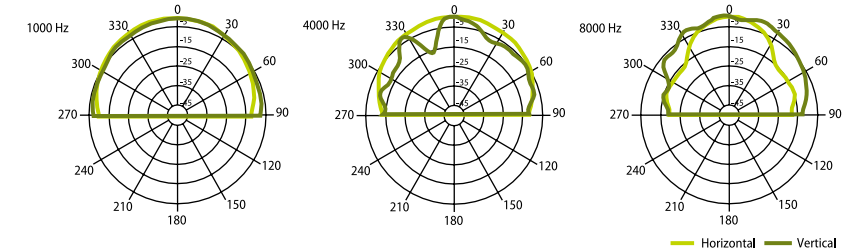

CABINET LOUDSPEAKERS

iSpeak Surface Mount Plastic Loudspeakers

Plastic enclosure surface mount loudspeaker with built-in 100V line transformer.





iSpeak 5

iSpeak 5 ABS plastic cabinet loudspeakers for constant voltage speaker installation systems. Effortless mounting on any surface: walls or ceilings. Modern, simple and compact form design cabinet loudspeaker with integrated 5" full range driver. This loudspeaker produces clear intelligible sound and is good for speech and back ground music applications.


Especially suitable for places where loudspeakers should not make any influence to interior.





HORIZONTAL / VERTICAL POLAR DIAGRAMS



FREQUENCY RESPONSE

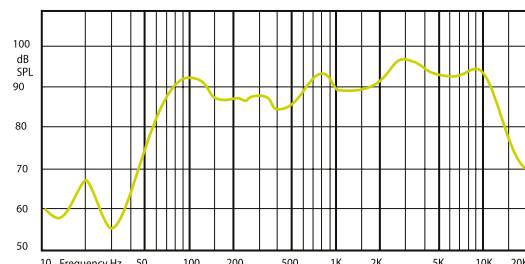

IMPEDANCE

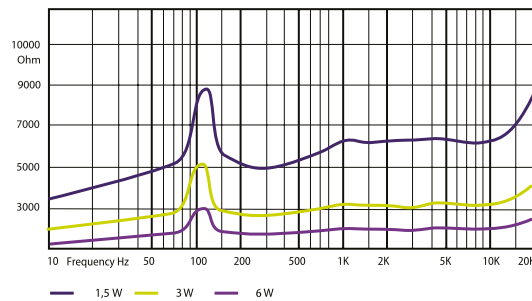

Technical Specifications	iSpeak 5
Rated power	6 W
Transformer power taps	6 W - 3 W - 1,5 W
Sensitivity	90 dB (1W/1m)
Maximum SPL	102 dB (Pmax/1m at 2834 kHz)
Frequency response	70 Hz - 18 kHz
Dispersion at 1000 Hz	180° (H), 140° (V)
Driver dimensions	5" (127 mm)
Dimensions	265 mm x 165 mm x 72 mm
Weight	1,2 kg
Material	High impact polystyrene plastic, steel grill
Colour	White (RAL 9016)

CABINET LOUDSPEAKERS

iSpeak Surface Mount Plastic Loudspeakers

Plastic enclosure surface mount loudspeakers with built-in 100V line transformer.






iSpeak 6

Designed to be easily and quickly mounted on any flat surface, horizontally or vertically.

The enclosure features a full range speaker giving excellent speech intelligibility and is ideal for background music reproduction. It is also particularly good for applications with sensitive interiors. Available in two white shades, RAL9016 and RAL 9018.




HORIZONTAL / VERTICAL POLAR DIAGRAMS

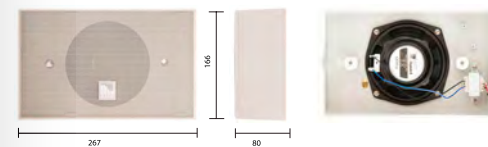


Technical Specifications	iSpeak 6
Rated power	6 W
Transformer power taps	6 W - 3 W
Sensitivity	92 dB (1 W/1 m)
Maximum SPL	99 dB (Pmax/1 m) at 2491 Hz
Frequency response	130 Hz - 17 kHz
Dispersion at 1000 Hz	180° (H), 140° (V)
Driver size	5,5" (139 mm)
Dimensions	166 mm x 267 mm x 80 mm
Weight	1 kg
Material	High impact polystyrene plastic, steel grill
Colour	Papyrus white (RAL 9018), white (RAL 9016)

FREQUENCY RESPONSE

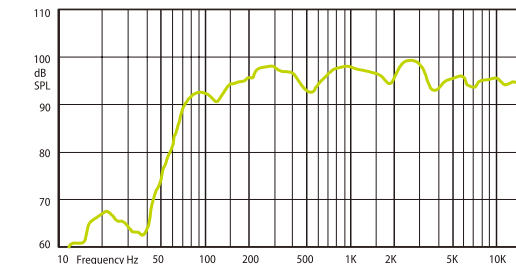

IMPEDANCE

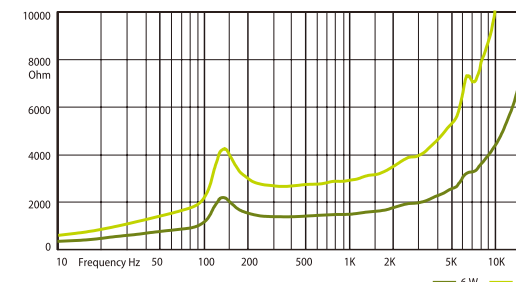

PS Plastic cabinet Speakers

Plastic enclosure loudspeakers with built-in 100V line transformer.


PS 6

Neutral design round plastic enclosure cabinet loudspeaker with steel grill.
Built-in 100V transformer. Designed for mounting on horizontal or vertical surface.
Excellent speech intelligibility and background music reproduction.




Technical Specifications	PS 6
Rated power	10 W
Transformer power taps	10 W - 5 W - 2,5 W
Sensitivity	93 dB (1W / 1m)
Maximum SPL	114 dB (Pmax / 1m) at 1425 kHz
Frequency response	80 Hz - 18 kHz
Dispersion at 1000 Hz	180° Conical
Driver dimensions	6" (152 mm)
Dimensions	ø 255 mm x 80 mm
Weight	1,3 kg
Material	ABS plastic
Colour	White (RAL 9016)


HORIZONTAL / VERTICAL POLAR DIAGRAMS

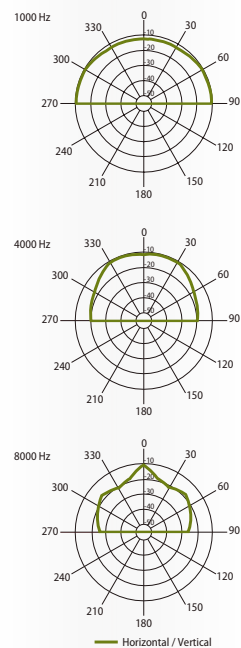

FREQUENCY RESPONSE

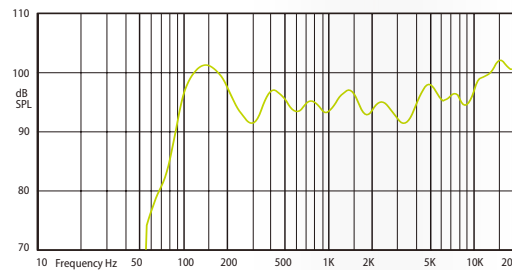

IMPEDANCE

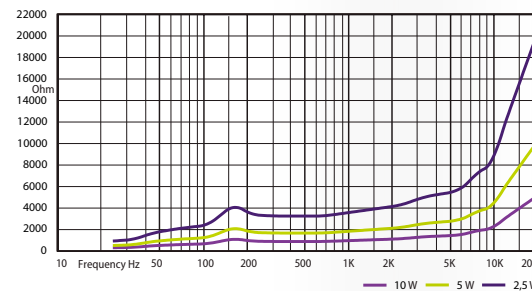


EVACW Surface Mount Voice Evacuation Loudspeakers

Metal wall mounted loudspeakers for voice evacuation systems.


EVACW 5

EVACW 5 metal enclosure loudspeakers with built-in 100V transformer. EVACW speakers are mainly used in voice evacuation systems. Thermal fuse and ceramic wire terminal are integrated to be compliant with EN54-24 standard. Full range speaker has very good medium frequency response to produce clear and intelligible speech. Simple installation on any flat surface, horizontally or vertically.

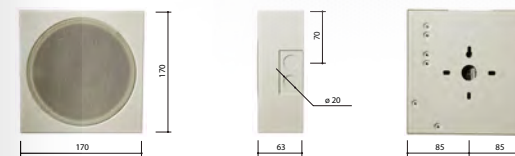


Technical Specifications	EVACW 5
Rated power	6 W (8 Ω)
Transformer power taps	6 W - 4 W - 2 W - 1 W - 0,5 W - 0,25 W
Sensitivity	92 dB (1 W/1 m)
Maximum SPL	100 dB (Pmax/1 m) at 3620 Hz
Frequency response	150 Hz - 20 kHz
Dispersion at 1000 Hz	120° (H), 120° (V)
Driver dimensions	5" (127 mm)
Dimensions	170 mm x 170 mm x 63 mm
Weight	1,4 kg
Material	Steel
Colour	White (RAL 9016)


HORIZONTAL / VERTICAL POLAR DIAGRAMS

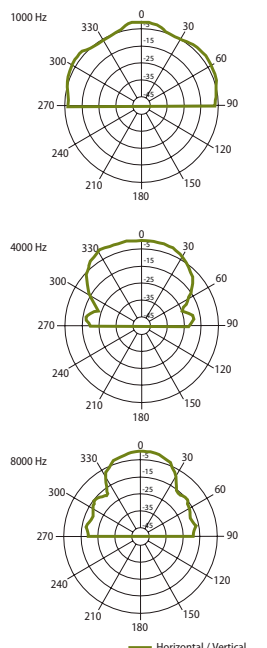

FREQUENCY RESPONSE

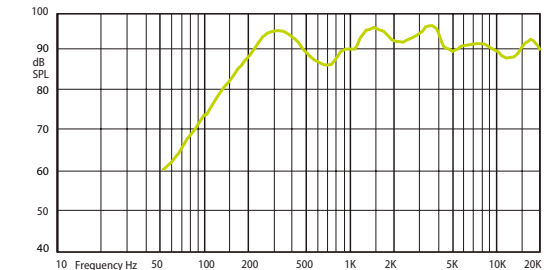

IMPEDANCE

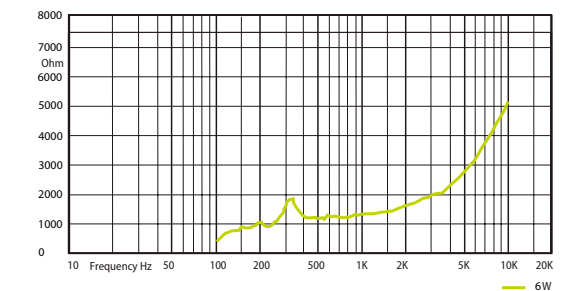

CABINET LOUDSPEAKERS W Wall Mount Loudspeakers




W series wall mount loudspeakers.

W10 RS


W10RS loudspeakers are designed for three-wire public address installation. When a priority message is transmitted, attenuator resistance will be eliminated and the speaker will be used in full power mode. W10RS has 4" full range speaker inside with powerful middle range response. Simple installation on any flat surface, clear speech and music reproduction allows usage of these loudspeakers in places such as school classrooms, hospitals or even government institution buildings.





HORIZONTAL / VERTICAL POLAR DIAGRAMS



FREQUENCY RESPONSE

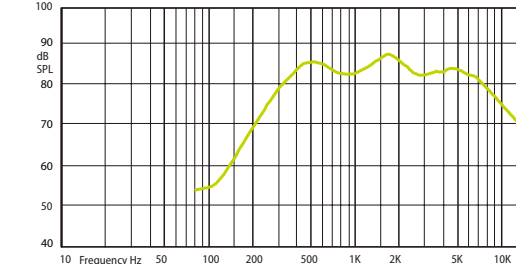

IMPEDANCE

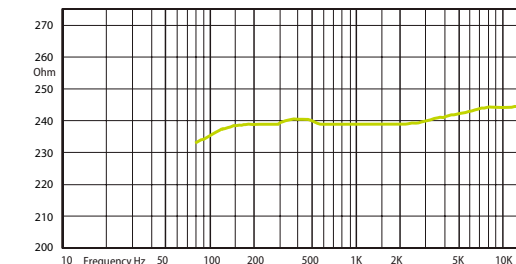

Technical Specifications	W10 RS
Rated power	10 W
Transformer power taps	10 W - 5 W - 2,5 W
Sensitivity	83 dB (1 W/1 m)
Maximum SPL	98 dB (Pmax/1 m) at 1442 Hz
Frequency response	180 Hz – 15 kHz
Dispersion at 1000 Hz	170° (H), 170° (V)
Driver dimensions	4" (101 mm)
Dimensions	205 mm x 180 mm x 105 mm
Weight	0,9 kg
Material	Housing – ABS plastic, Grill – Steel
Colour	Papyrus white (RAL 9018)



CABINET LOUDSPEAKERS



W Wall Mount Loudspeakers

W series wall mount loudspeakers.

W3 & W10


These loudspeakers are designed for use in public address and background music situations, where cost is a consideration. Small size high quality plastic cabinets with a 4" speaker and transformer inside. Good for use in hotel bathrooms, service rooms, parking areas and corridors.

Technical Specifications	W3	W10
Rated power	3 W	10 W
Transformer power taps	3 W - 1,5 W - 0,75 W	10 W - 5 W - 2,5 W
Sensitivity	84 dB (1 W/1 m)	87 dB (1 W/1 m)
Maximum SPL	93 dB (Pmax/1 m) at 1860 Hz	101 dB (Pmax/1 m) at 1815 Hz
Frequency response	200 Hz – 15 kHz	200 Hz – 15 kHz
Dispersion at 1000 Hz	180° (H), 180° (V)	180° (H), 180° (V)
Driver dimensions	4" (101 mm)	4" (101 mm)
Dimensions	185 mm x 190 mm x 90 mm	185 mm x 190 mm x 90 mm
Weight	0,6 kg	0,7 kg
Material	ABS plastic	ABS plastic
Colour	White (RAL 9016)	White (RAL 9016)




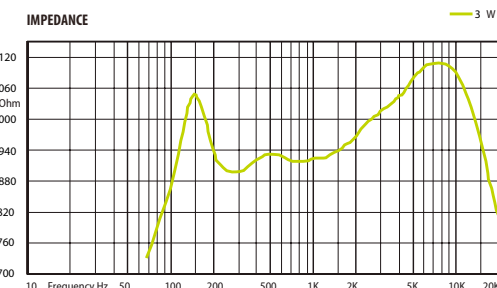
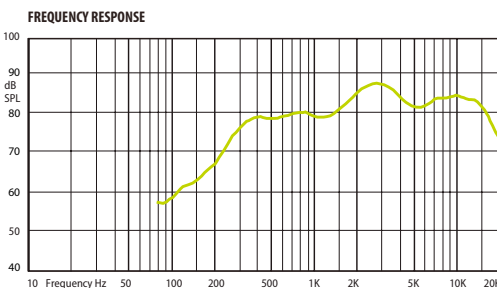


W3



HORIZONTAL / VERTICAL POLAR DIAGRAMS



HORIZONTAL / VERTICAL POLAR DIAGRAMS



W10

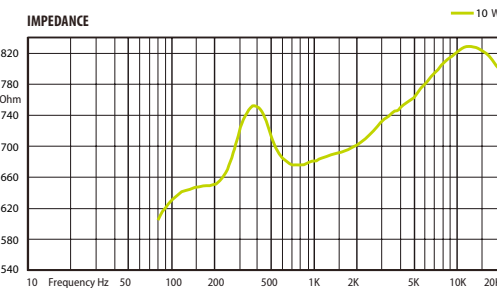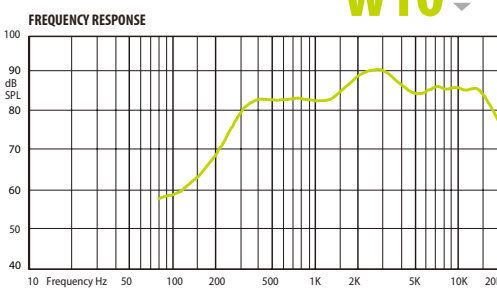

CABINET LOUDSPEAKERS

VIVA 3 Wall Mount Plastic Loudspeakers

Plastic enclosure loudspeakers with built-in 100 V transformers.

VIVA 3

The legendary Viva range of AMC cabinet loudspeakers has been in production for many years, yet is still in high demand all over the Globe. An ageless cabinet design, combined with a high quality sound output makes these speakers very popular. The loudspeakers are assembled using premium components: top grade plastic parts and high quality speaker components. The range consists of 3" or 5" speakers with corresponding tweeters. Available in black and white.




Technical Specifications	VIVA 3 – 302T	VIVA 3 – 502T
Rated power	25 W (8 Ω)	50 W (8 Ω)
Transformer power taps	15 W - 7,5 W - 3 W - (8 Ω)	25 W - 15 W - 5 W - (8 Ω)
Sensitivity	87 dB (1 W/1 m)	91 dB (1 W/1 m)
Maximum SPL	102 dB (Pmax/1 m) at 8137 Hz	108,7 dB (Pmax/1 m) at 4448 Hz
Frequency response	150 Hz – 20 kHz	110 Hz – 20 kHz
Dispersion at 1000 Hz	170° (H), 180° (V)	180° (H), 155° (V)
Driver dimensions	3" (76 mm) woofer, 1" (25 mm) tweeter	5" (127 mm) woofer, 1" (25 mm) tweeter
Dimensions	200 mm x 113 mm x 133 mm	245 mm x 180 mm x 185 mm
Weight	1,5 kg	2,8 kg
Material	Housing - ABS plastic, U- bracket and grill - steel	Housing - ABS plastic, U- bracket and grill - steel
Colour	White (RAL 9016), Black (RAL 9017)	White (RAL 9016), Black (RAL 9017)


VIVA 3 302T




HORIZONTAL / VERTICAL POLAR DIAGRAMS

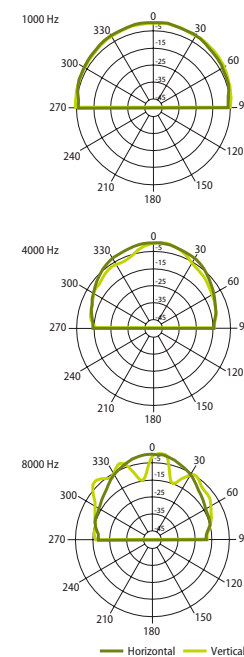

FREQUENCY RESPONSE

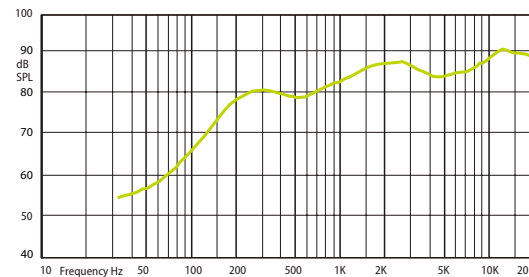


IMPEDANCE

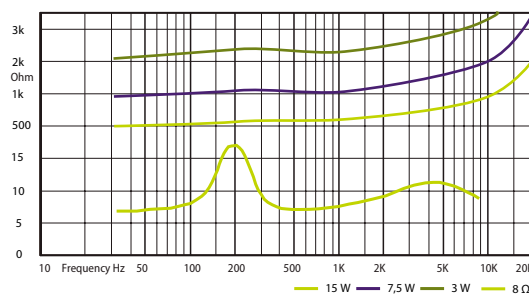


VIVA 3 502T




HORIZONTAL / VERTICAL POLAR DIAGRAMS

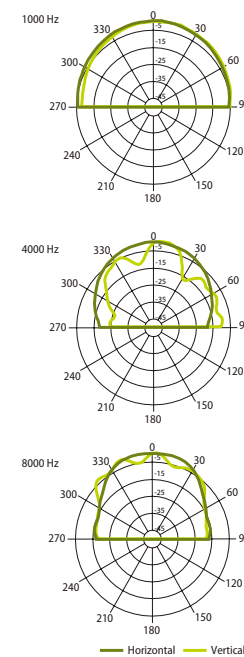

FREQUENCY RESPONSE

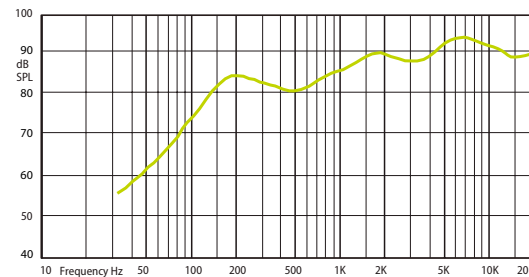

IMPEDANCE

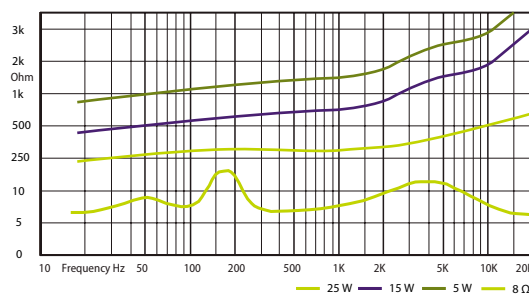

CABINET LOUDSPEAKERS

VIVA Wall Mount Plastic Loudspeakers


Latest design powerful speakers for background music.

VIVA 4


VIVA 4 elegant contemporary design, smooth cabinet surface and mild grill. Classic shape with its advanced twist that lets the loudspeaker to adapt easily in a wide variety of contemporary interiors and become an integral part of the architecture. Rotating AMC logo, semi-circle U-bracket enables a wide array of mounting possibilities. Power adjustment of the speaker is very simple. The ultra thin and flat power selector looks very elegant. Integrated Phoenix connectors show advanced design of the loudspeaker. Two colour choice. Two-way loudspeaker with 4 inch low frequency and 1 inch silk tweeter inside.




HORIZONTAL / VERTICAL POLAR DIAGRAMS

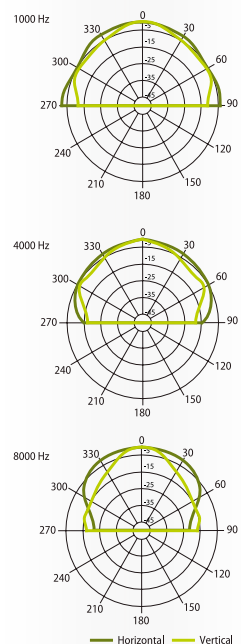

FREQUENCY RESPONSE

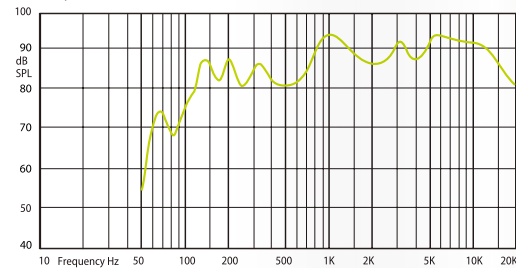

IMPEDANCE

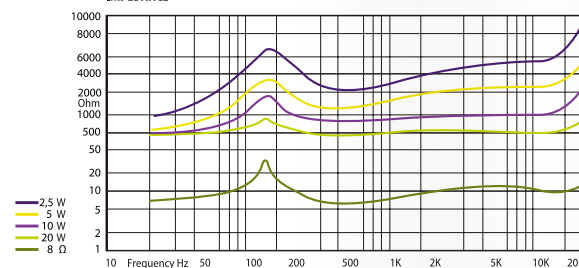

Technical Specifications		VIVA 4
Rated power		20 W (8 Ω)
Transformer power taps		20 W - 10 W - 5 W - 2,5 W - 8 Ω
Sensitivity		89 dB (1 W/1 m)
Maximum SPL		102 dB (Pmax / 1m) at 3254
Frequency response		90 Hz - 20 kHz
Dispersion at 1000 Hz		150° (H), 120° (V)
Driver dimensions		4" (101 mm) woofer, 1" (25 mm) tweeter
Dimensions		205 mm x 188 mm x 132 mm
Weight		2,1 kg
Material		Housing - plastic, grill and U-bracket - steel
Colour		White (RAL 9016), black (RAL 9017)

CABINET LOUDSPEAKERS

VIVA IP Wall Mount Plastic Loudspeakers


Elegant design background music loudspeaker for indoor and outdoor use.

VIVA 4IP


VIVA 4 IP contemporary design cabinet loudspeaker with smooth surface. The speaker is compliant with IP 55 ingress protection and can be used outdoor. Semi-circle U- mounting bracket and rotating logo enables mounting under different angles horizontally and vertically. Input power can be adjusted with selector on loudspeakers back side. In order to reach IP 55 ingress protection, wire connectors are isolated from moisture by using plastic protection cover with cable gland. The speakers are produced in two colors: black and white. VIVA 4 IP two-way loudspeakers are equipped with 4 inch driver and 1 inch silk tweeter.




HORIZONTAL / VERTICAL POLAR DIAGRAMS

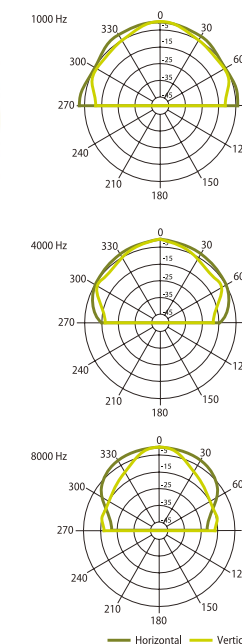

FREQUENCY RESPONSE

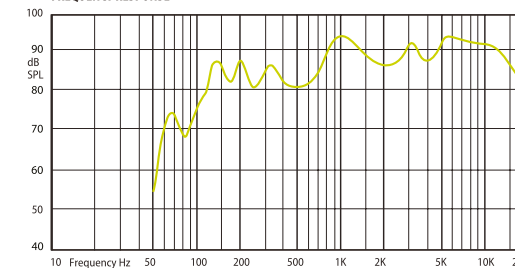

IMPEDANCE

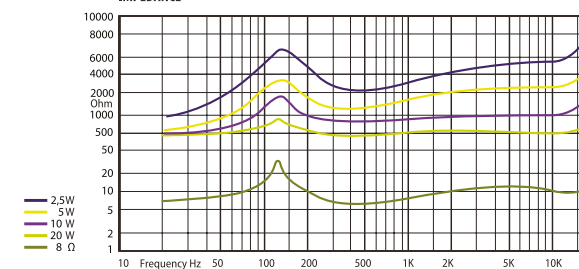

Technical Specifications		VIVA 4 IP
Rated power		20 W (8 Ω)
Transformer power taps		20 W - 10 W - 5 W - 2,5 W - 8 Ω
Sensitivity		89 dB (1 W/1 m)
Maximum SPL		102 dB (Pmax / 1m) at 3254Hz
Frequency response		90 Hz - 20 kHz
Dispersion at 1000 Hz		150° (H), 120° (V)
Protection		IP 55
Driver dimensions		4" (101 mm) woofer, 1" (25 mm) tweeter
Dimensions		205 mm x 188 mm x 132 mm
Weight		2,1 kg
Material		Housing - plastic, grill and U-bracket - steel
Colour		White (RAL 9016), black (RAL 9017)

CABINET LOUDSPEAKERS

VIVA Wall Mount Plastic Loudspeakers

Latest design powerful speakers for background music.



VIVA 5

Elegant contemporary design, smooth cabinet surface with body coloured steel grill. Classic shape with an advanced twist that lends this loudspeaker to adapt easily in a wide variety of contemporary interiors and become an integral part of the architecture. The newly designed semi-circular mounting bracket enables a wide array of mounting possibilities. It not only looks good, but also makes it easy to adjust the mounting angle within a 15 degree radius. The ultra thin and flat power selector looks very elegant, and the use of the integrated Phoenix connectors highlights the advanced design of the loudspeaker. The AMC logo rotates, available in white and black.




Technical Specifications	VIVA 5
Rated power	30 W (8Ω)
Transformer power taps	25 W - 15 W - 10 W - 5 W - 8 Ω
Sensitivity	87 dB (1 W/1 m)
Maximum SPL	101 dB (Pmax/1 m) at 1000 Hz
Frequency response	80 Hz – 20 kHz
Dispersion at 1000 Hz	150° (H), 120° (V)
Driver dimensions	5" (127 mm) woofer, 1" (25,4 mm) tweeter
Dimensions	245 mm x 175 mm x 170 mm
Weight	2,4 kg
Material	Housing – plastic, grill and U-bracket steel
Colour	White (RAL9016), black (RAL 9017)



HORIZONTAL / VERTICAL POLAR DIAGRAMS

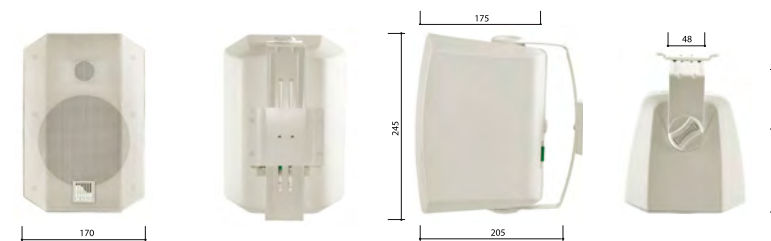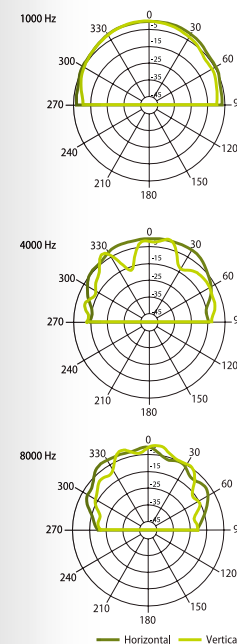

FREQUENCY RESPONSE

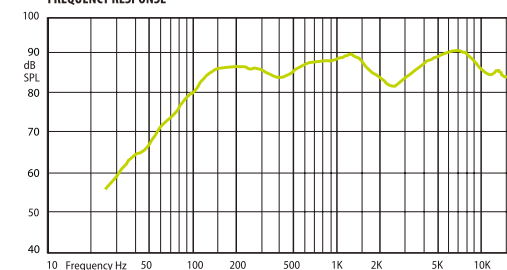

IMPEDANCE

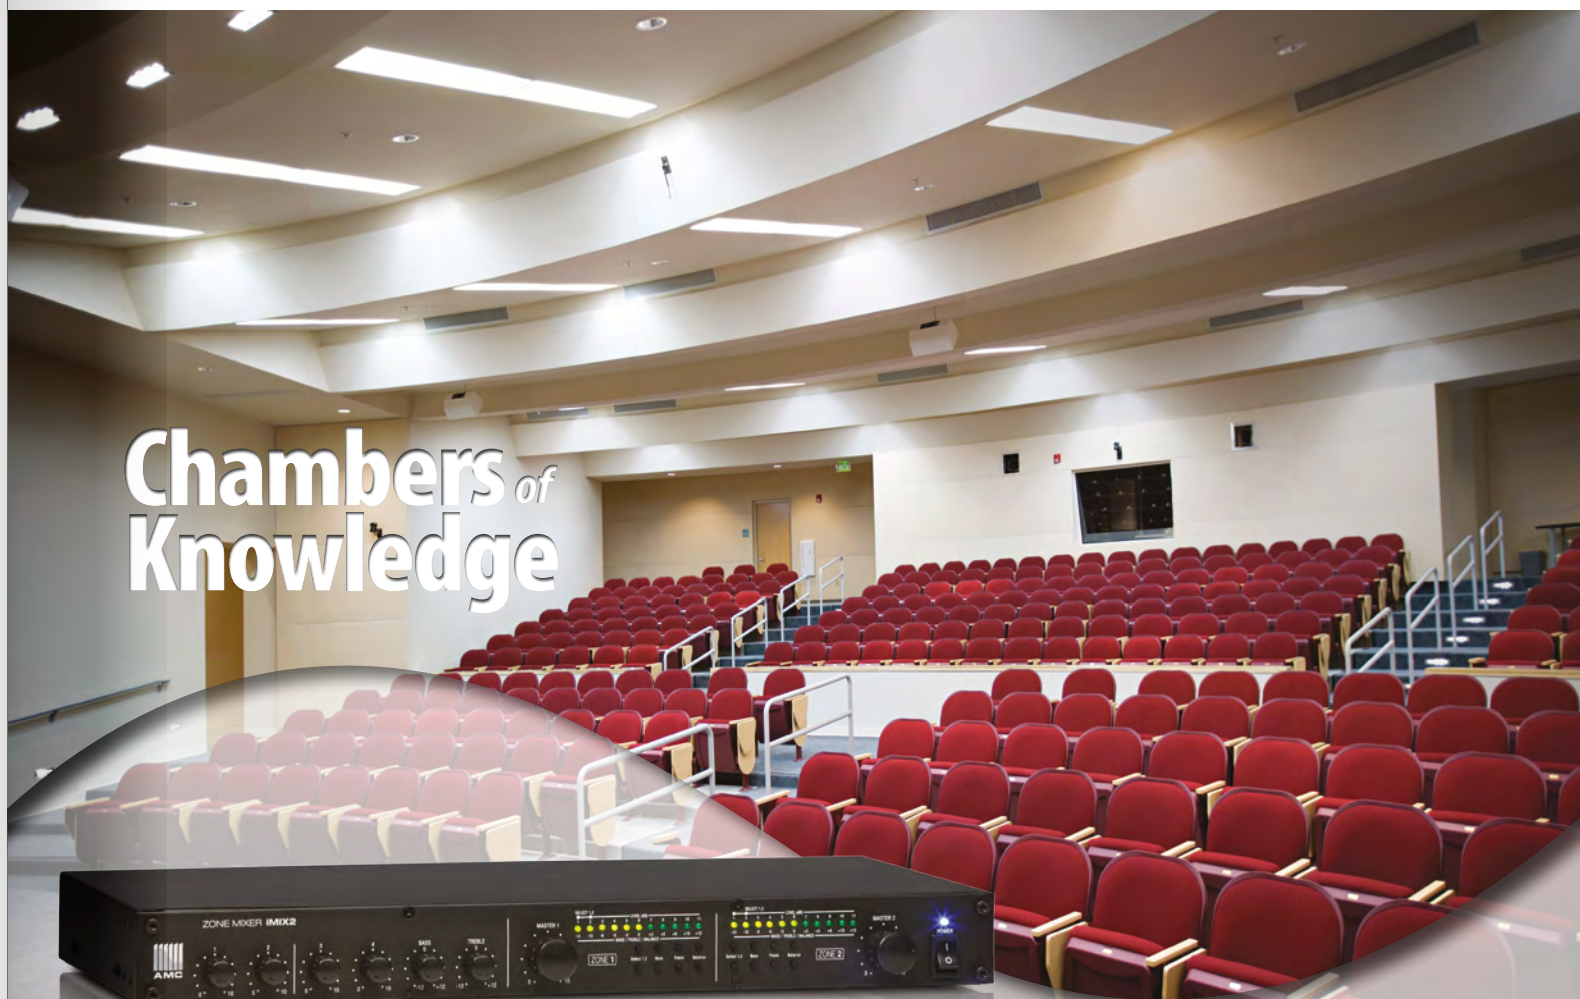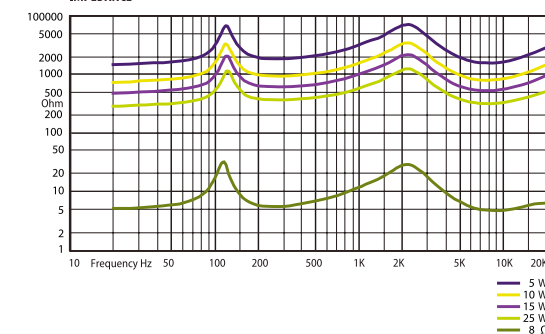

Simple. Reliable. Profitable.

CABINET LOUDSPEAKERS

VIVA Wall Mount Plastic Loudspeakers


Latest design powerful speakers for background music.

VIVA 8


Designed for background music and paging, having a very strong, clear and powerful sound. Special mounting bracket and rotating logo allows this speaker to be mounted vertically or horizontally. 8" woofer and 1" tweeter mounted in a robust ABS plastic enclosure with aluminium grill. Suitable for outdoor use.




HORIZONTAL / VERTICAL POLAR DIAGRAMS

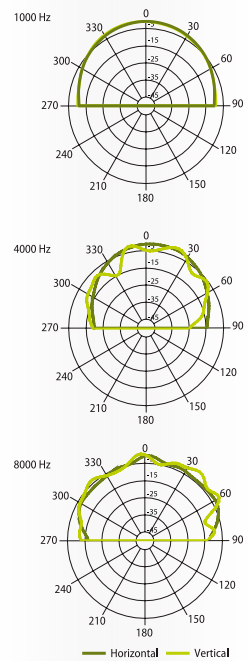

FREQUENCY RESPONSE

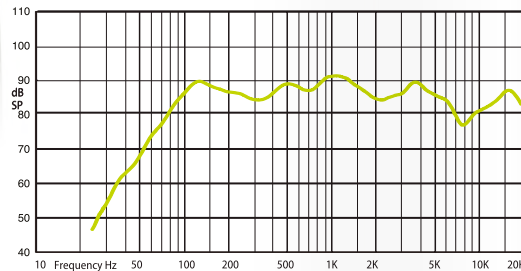

IMPEDANCE

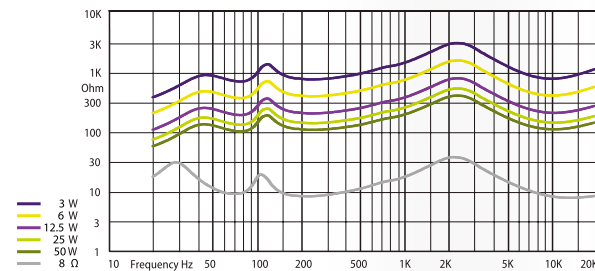

Technical Specifications	VIVA 8
Rated power	60 W (8 Ω)
Transformer power taps	50 W - 25 W - 12,5 W - 6 W - 3 W - 8 Ω
Sensitivity	87 dB (1 W/1 m)
Maximum SPL	108 dB (Pmax/1m) at 917 Hz
Frequency response	60 Hz – 20 kHz
Dispersion at 1000 Hz	120° (H), 120° (V)
Driver dimensions	8" (203mm) woofer, 1" (25,4) tweeter
Dimensions	340 mm x 220 mm x 216 mm
Weight	5,28 kg
Material	Body - plastic, grill - aluminum, U-bracket - steel
Colour	White (RAL 9016), black (RAL 9017)



CEILING LOUDSPEAKERS

MC Voice Evacuation Speaker According EN54-24 Standard


Metal ceiling loudspeakers with ABS plastic dome equipped with 100V transformer, ceramic terminal and thermal fuse.

MC 4EN


MC 4EN is designed for use in voice evacuation and voice alarm applications for clear and intelligible speech announcements. Quick fit clamps allow easy and fast installation into false ceilings. High sound pressure level SPL and optimized middle frequency sound reproduction ensures reliable operation in case of an emergency situation. Conforms EN54-24 standard.




HORIZONTAL / VERTICAL POLAR DIAGRAMS

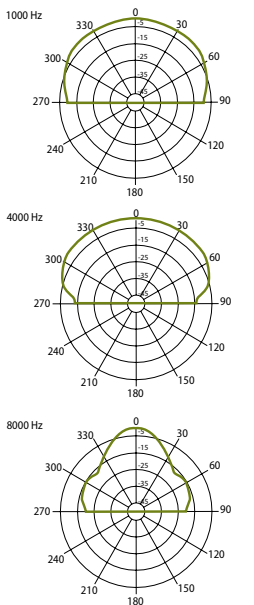

FREQUENCY RESPONSE

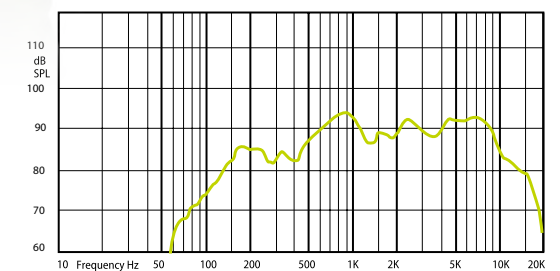

IMPEDANCE

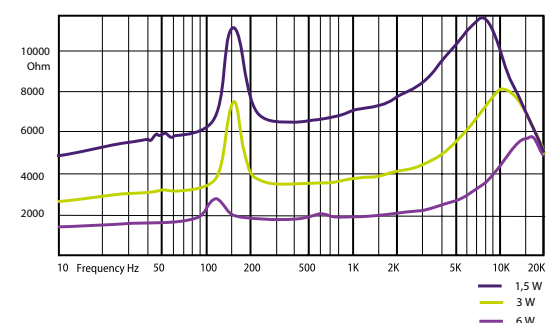

Technical Specifications	MC 4EN
Rated power	6 W
Transformer power taps	6 W - 3 W - 1,5 W
Sensitivity	90 dB (1W/1m)
Maximum SPL	98 dB (Pmax/1m) at 1 kHz
Frequency response	110 Hz - 15 kHz
Dispersion at 1000 Hz	165° Conical
Driver dimensions	4" (100 mm)
Dimensions	∅ 181 mm x 65 mm
Weight	0,9 kg
Material	Steel
Colour	White (RAL 9016)

CEILING LOUDSPEAKERS

EVAC Voice Evacuation Loudspeaker EN54-24 Certified

Metal ceiling loudspeakers with built-in 100V transformer, ceramic terminal, thermal fuse, steel grill and steel fire dome certified according to EN54-24 standard.



EVAC 5EN

EVAC 5EN voice evacuation loudspeakers designed for use in a voice alarm applications for clear and intelligible voice announcements and background music. The loudspeakers are equipped with ceramic terminal and thermal fuse and conforms to high quality requirements of EN54-24 standard. Steel housing and metal grill prevents the fire spreading in to the ceiling. Ceramic terminal and thermal fuse ensures faultless operation in the case of emergency situation.

Speakers are certified by Intertek.



Technical Specifications	EVAC 5EN
Rated power	6 W
Transformer power taps	6 W - 3 W - 1,5 W - 0,75 W - 0,25 W
Sensitivity	87 dB (1W / 1m)
Maximum SPL	95 dB (Pmax / 1m) at 1 kHz
Frequency response	180 Hz - 17,5 kHz
Dispersion at 1000 Hz	180° conical
Driver dimensions	5" (127 mm)
Dimensions	ø 190 mm x 94 mm
Weight	1,1 kg
Material	Steel
Colour	White (RAL 9016)

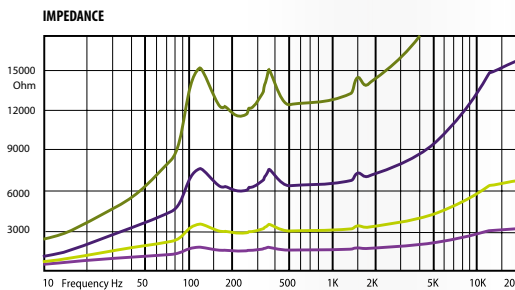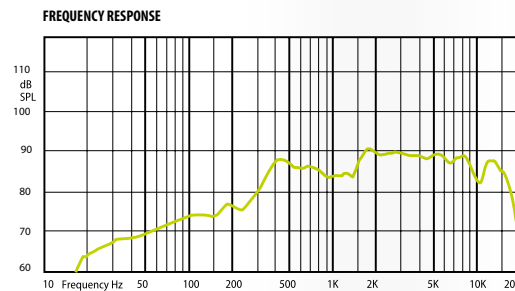

CEILING LOUDSPEAKERS

EVAC Voice Evacuation Ceiling Loudspeaker

Metal ceiling loudspeakers with built-in 100V transformer, steel grill and steel fire dome.



EVAC 5

Voice evacuation speaker EVAC5 is designed for mounting in false ceilings or panels. Loudspeaker complies with EN54-24 standard and is equipped with ceramic terminal and thermal fuse. These speakers are used wherever intelligible speech announcements are the main requirement.

However, this versatile unit works just as well in background music applications.



Technical Specifications	EVAC 5
Rated power	6 W
Transformer power taps	6 W - 3 W - 1,5 W - 0,75 W - 0,25 W
Sensitivity	93 dB (1 W/1 m)
Maximum SPL	106 dB (Pmax/1 m) at 1584 Hz
Frequency response	240 Hz – 20 kHz
Dispersion at 1000 Hz	170° conical
Driver dimensions	5" (127 mm)
Dimensions	ø 185 mm x 118 mm
Weight	1,3 kg
Material	Steel
Colour	Speaker - white (RAL 9016), fire dome - black (RAL 9005)

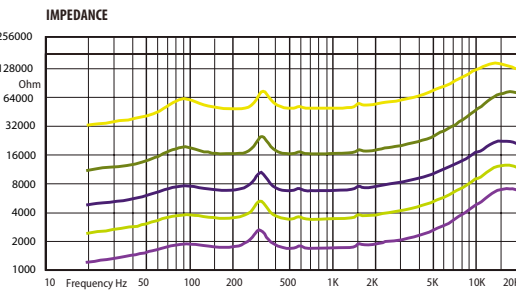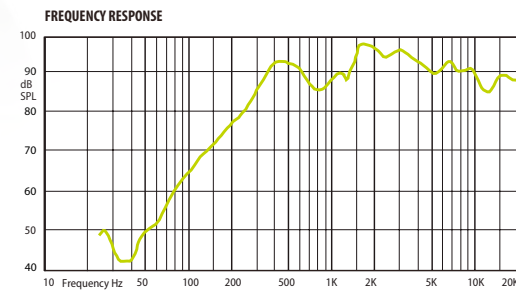

CEILING LOUDSPEAKERS

EVAC Voice Evacuation Ceiling Loudspeakers



Metal ceiling loudspeakers with built-in 100V transformer. Steel grill and fire dome. Designed for easy mounting in to false ceilings

EVAC 50X

Designed to be installed in false ceilings or panels. EVAC 50X is perfect for use in a voice alarm role, for clear and intelligible speech reproduction as well as background music. In compliance with EN 54-24 standard, EVAC 50X is equipped with ceramic terminal and thermal fuse.



Technical Specifications	EVAC 50X
Rated power	6 W
Transformer power taps	6 W - 3 W - 1,5 W - 0,75 W - 0,25 W
Sensitivity	92 dB (1 W/1 m)
Maximum SPL	104 dB (Pmax/1 m) at 3651 Hz
Frequency response	150 Hz – 18 kHz
Dispersion at 1000 Hz	180° conical
Driver dimensions	5" (127 mm)
Dimensions	ø 180 mm x 130 mm
Weight	1,32 kg
Material	Steel
Colour	Speaker - white (RAL 9016), fire dome - orange (RAL 2008)

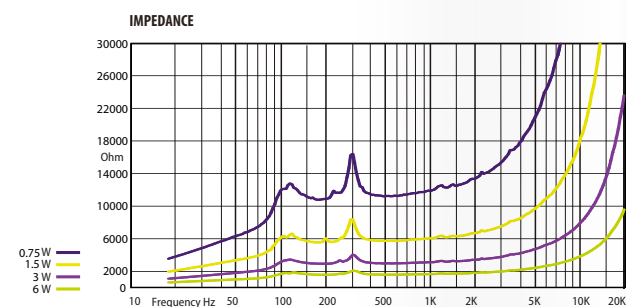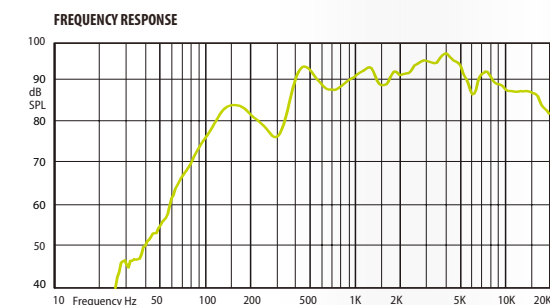

CEILING LOUDSPEAKERS

EVAC Voice Evacuation Ceiling Loudspeakers



Metal ceiling loudspeakers with built-in 100V transformer. Steel grill and fire dome. Designed for easy mounting in to false ceilings

EVAC 6

EVAC6 is equipped with ceramic wire terminals mounted outside loudspeaker body. Transformer tap switch is also outside the speaker body and so is easily accessible for the installer. The EVAC 6 has an integrated 6" 10W coaxial speaker, giving superb reproduction of voice and background music in voice evacuation situations.



Technical Specifications	EVAC 6
Rated power	10 W
Transformer power taps	10 W – 5 W – 2,5 W
Sensitivity	93 dB (1 W/1 m)
Maximum SPL	102 dB (Pmax/1 m) at 2420 Hz
Frequency response	150 Hz – 20 kHz
Dispersion at 1000 Hz	180° conical
Driver dimensions	6" (152 mm)
Dimensions	ø 200 mm x 101 mm
Weight	1,43 kg
Material	Steel
Colour	Speaker - white (RAL 9016), fire dome - orange (RAL 2008)

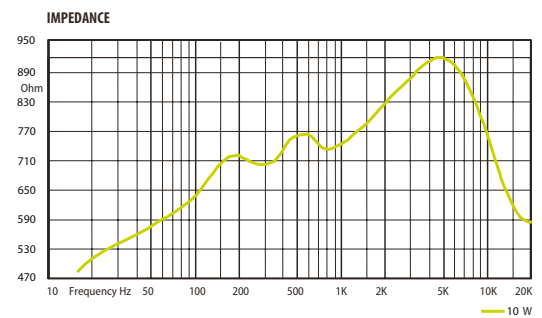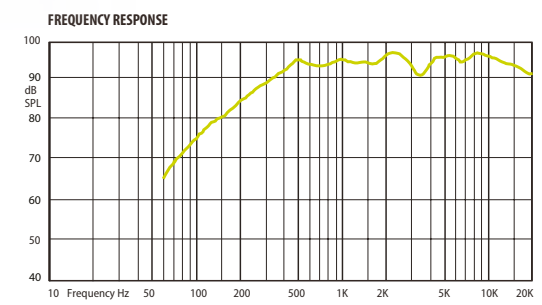

CEILING LOUDSPEAKERS

MC Metal Ceiling Loudspeakers

MC - metal ceiling loudspeakers with built-in 100V transformer.




MC 4TA & MC 5T

Quick fit clamps allow easy and quick mounting into false ceilings. MC loudspeakers have powerful middle frequency sound reproduction and high sound pressure level (SPL). Ultra slim design of the speakers makes them ideal for installation in low space or minimum clearance situations. The MC series is perfect for speech announcements in emergency systems where public address is the main requirement.

MC 4TA






HORIZONTAL / VERTICAL POLAR DIAGRAMS

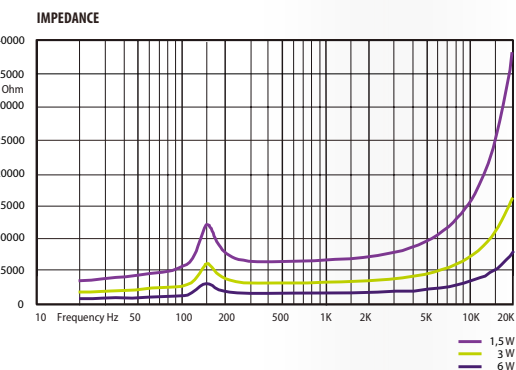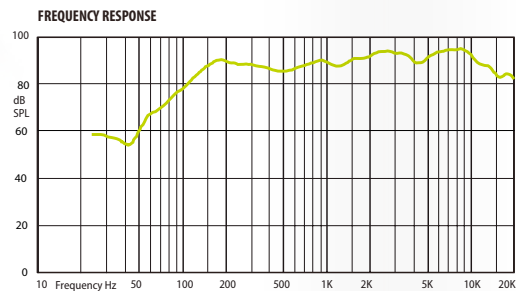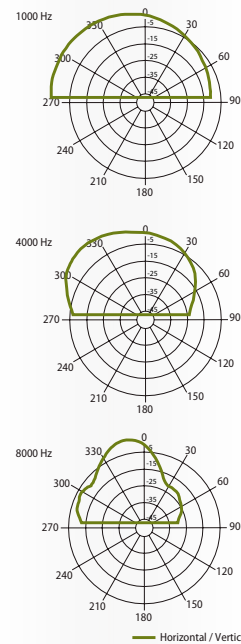

Technical Specifications	MC 4TA
Rated power	6 W
Transformer power taps	6 W - 3 W - 1,5W
Sensitivity	91 dB (1 W/1 m)
Maximum SPL	104 dB (Pmax/1 m) at 6878 Hz
Driver impedance	8 Ω
Frequency response	110 Hz – 17 kHz
Dispersion at 1000 Hz	180° conical
Driver dimensions	4" (100 mm) full range
Dimensions	ø 180 mm × 50 mm
Weight	0,7 kg
Material	Steel
Colour	White (RAL 9016)

MC 5T

HORIZONTAL / VERTICAL POLAR DIAGRAMS

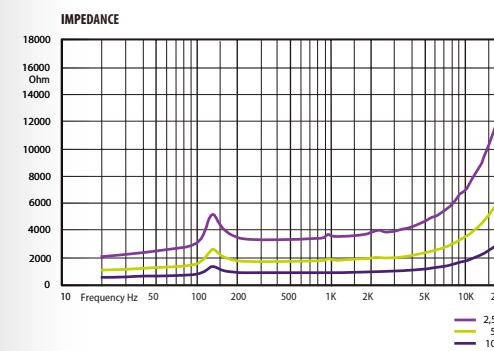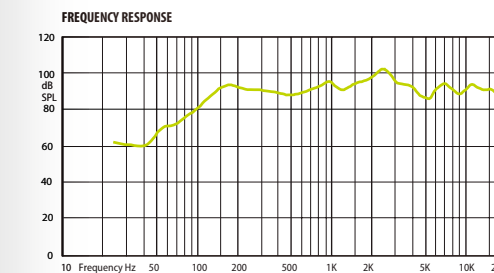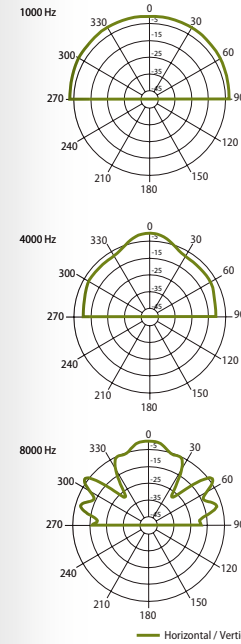

Technical Specifications	MC 5T
Rated power	10 W
Transformer power taps	10 W - 5 W - 2,5W
Sensitivity	94 dB (1 W/1 m)
Maximum SPL	113 dB (Pmax/1 m) at 2371 Hz
Driver impedance	8 Ω
Frequency response	100 Hz – 17 kHz
Dispersion at 1000 Hz	180° conical
Driver dimensions	5" (130 mm) full range
Dimensions	ø 200 mm × 54 mm
Weight	0,75 kg
Material	Steel
Colour	White (RAL 9016)

CEILING LOUDSPEAKERS

MC Metal Ceiling Loudspeakers

MC - metal ceiling loudspeakers with built-in 100V transformer.


MC 6T

Cost effective metal loudspeakers. Slim loudspeaker's construction designed for low installation depth, quick fit clamps allow easy and fast installation into false ceilings.

Light weight paper diaphragm and high efficiency magnet are the reasons of high performance in the middle frequency response.




HORIZONTAL / VERTICAL POLAR DIAGRAMS

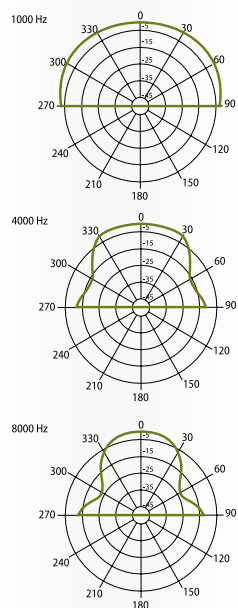

FREQUENCY RESPONSE



IMPEDANCE

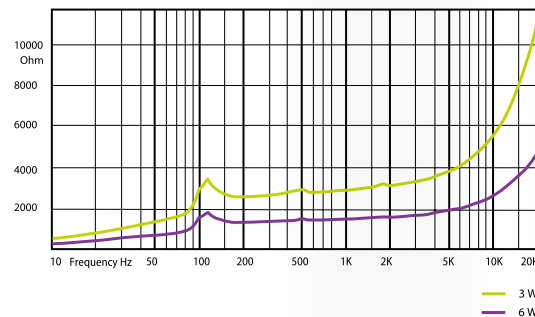

Technical Specifications	MC 6T
Rated power	6 W
Transformer power taps	6 W - 3 W
Sensitivity	92 dB (1 W/1 m)
Maximum SPL	104 dB (Pmax/1 m) at 1830 Hz
Frequency response	100 Hz - 18 kHz
Dispersion at 1000 Hz	180° conical
Driver dimensions	6" (152 mm) full range
Dimensions	Ø 200 mm x 65 mm
Weight	0,9 kg
Material	Steel
Colour	White (RAL 9016)

CEILING LOUDSPEAKERS

PC Plastic Ceiling Loudspeakers


Plastic ceiling loudspeakers with integrated 100V line transformer and plastic dome.

PC 3


The PC3 plastic loudspeaker has a plastic dome and a high quality 3" speaker inside. While small in size this 6W speaker delivers perfect clarity across the full range. The PC3 is mainly used in public spaces, where ceilings are relatively low and interiors are sensitive to any kind of external influence. Ideal for paging and background music applications.




HORIZONTAL / VERTICAL POLAR DIAGRAMS

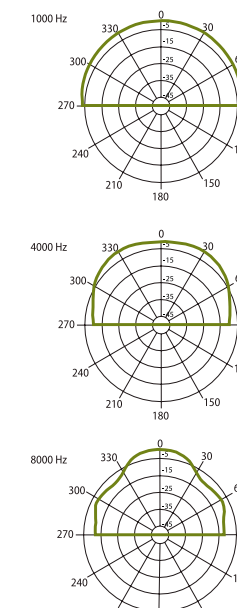

FREQUENCY RESPONSE

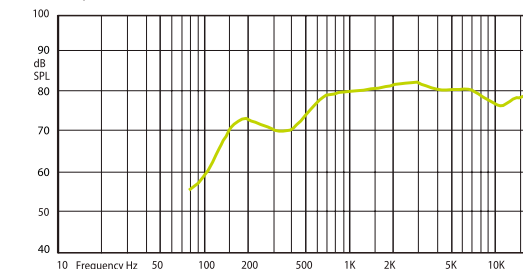

IMPEDANCE

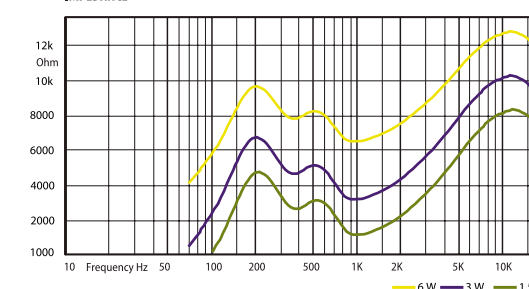

Technical Specifications	PC 3
Rated power	6 W
Transformer power taps	6 W - 3 W - 1,5 W
Sensitivity	81 dB (1 W / 1 m)
Maximum SPL	91 dB (Pmax / 1 m) at 2420 Hz
Frequency response	150 Hz - 20 kHz
Dispersion at 1000 Hz	180° conical
Driver dimensions	3" (76 mm)
Protections	IPX4
Dimensions	Ø115 mm x 85 mm
Weight	0,6 kg
Material	Plastic, steel grill
Colour	White (RAL 9016)

CEILING LOUDSPEAKERS

PC HP Plastic Ceiling Loudspeakers

High performance ceiling loudspeakers with 100V power transformer and 8Ω power tap.

PC 4HP

A high quality coaxial speaker incorporated into a plastic enclosure with an aluminium grill and metal dome. Very strong loudspeaker construction with excellent sound reproduction. These loudspeakers can be quickly and simply installed into false ceilings. Match a wide sound dispersion with an innovative design and you have a strong and powerful sound reproduction loudspeaker that has almost unlimited applications, such as: shopping malls, restaurants, office buildings, anywhere where the main requirement is background music reproduction. The speaker has a Phoenix connector with special cover for easy and safe installation.



Technical Specifications	PC 4HP
Rated power	40 W (8Ω)
Transformer power taps	20 W - 12 W - 8 W - 4 W - 2 W - 8Ω
Sensitivity	87 dB (1 W / 1 m)
Maximum SPL	102 dB (Pmax / 1 m) at 8912 Hz
Frequency response	120 Hz - 20 kHz
Dispersion at 1000 Hz	180° conical
Driver dimensions	4" (100 mm) woofer, 1" (25 mm) tweeter
Dimensions	Ø203 mm x 164 mm
Weight	1,97 kg
Material	Body - plastic, dome - steel, grill - aluminum
Colour	White (RAL 9016)




CEILING LOUDSPEAKERS

PCR Rimless Plastic Ceiling Loudspeakers

ABS plastic ceiling loudspeakers with built-in 100V transformer.

PCR 5T & PCR 8T

Excellent coaxial speakers for improved sound quality with new rimless enclosure design. Rimless grill with magnetic grill fixings lets easily and quickly install into false ceilings. Minimalistic design approved for sensitive interiors.

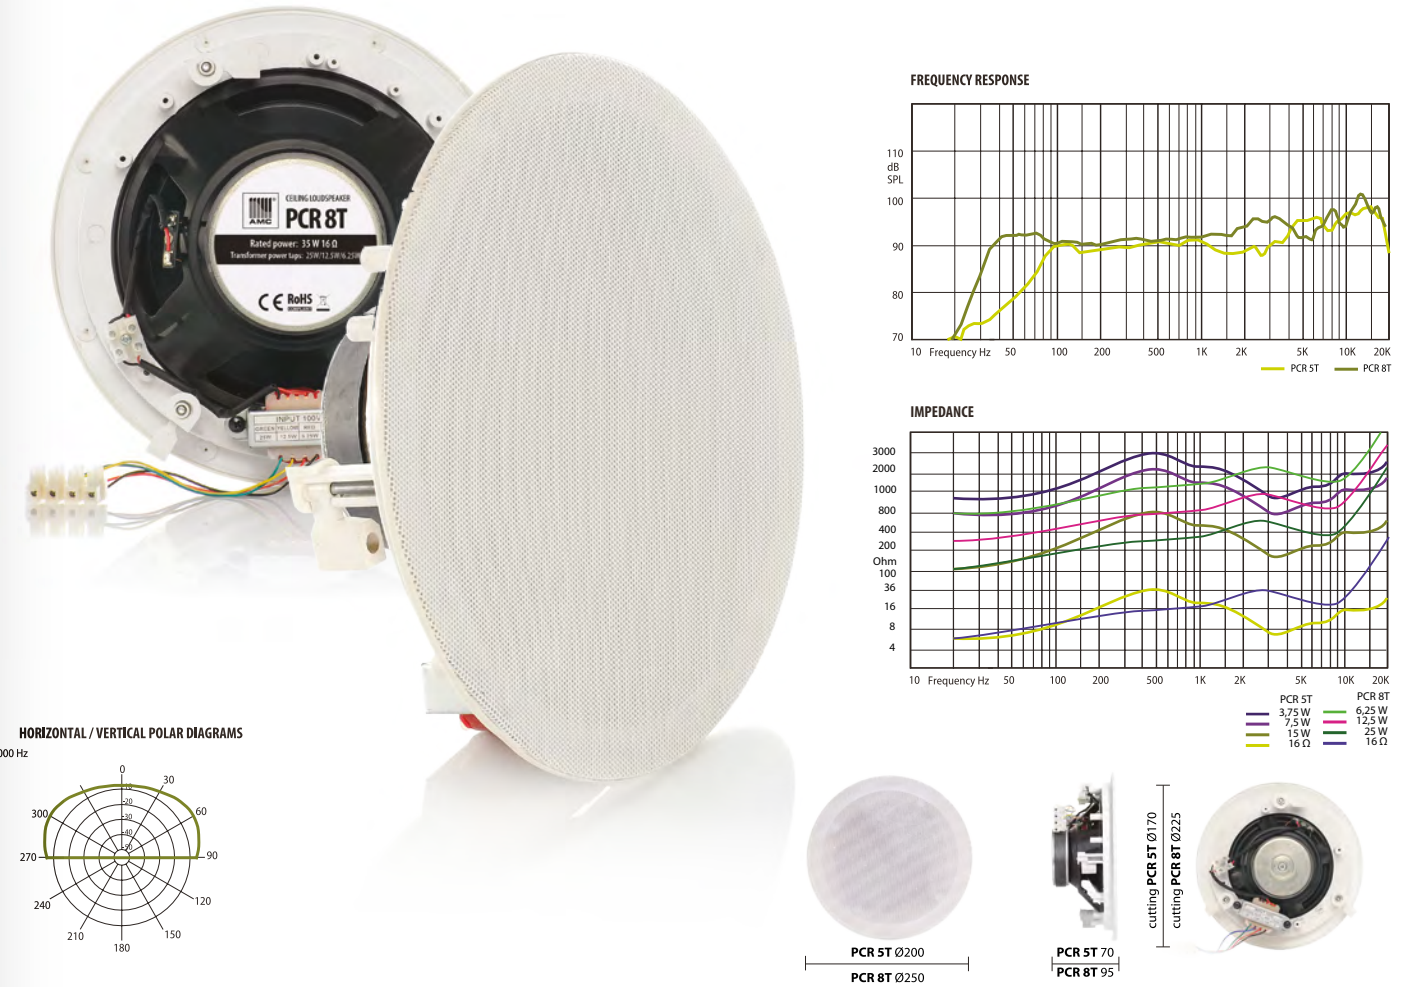

	PCR 5T	PCR 8T
Rated power	25 W (16 Ω)	35 W (16 Ω)
Transformer power taps	15 W - 7,5 W - 3,75 W	25 W - 12,5 W - 6,25 W
Sensitivity	89 dB (1 W/1 m)	90 dB (1 W/1 m)
Maximum SPL	101dB (Pmax/1 m) at 15694 Hz	105 dB (Pmax/1 m) at 15249 Hz
Frequency response	80 Hz - 20 kHz	60 Hz - 20 kHz
Dispersion at 1000 Hz	120° conical	120° conical
Driver dimensions	5" (130 mm) woofer, 0,5" (13 mm) tweeter, coaxial	8" (200 mm) woofer, 0,5" (13 mm) tweeter, coaxial
Dimensions	ø 200 mm × 70 mm	ø 250 mm × 95 mm
Weight	1,1 kg	1,7 kg
Material	Plastic, Steel grill	Plastic, Steel grill
Colour	White (RAL 9016)	White (RAL 9016)

CEILING LOUSPEAKERS

PC Plastic Ceiling Loudspeakers

ABS plastic ceiling loudspeakers with built-in 100V transformer.


PC 5T & PC 8T

These units provide an excellent full range of clear sound reproduction. Used where a combination of high quality background music and public address is required. The loudspeakers are designed to be quickly and simply installed into false ceilings and are equipped with coaxial speakers for improved sound quality.


PC 5T




HORIZONTAL / VERTICAL POLAR DIAGRAMS

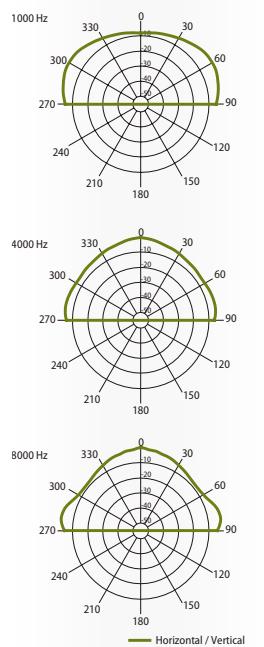

FREQUENCY RESPONSE

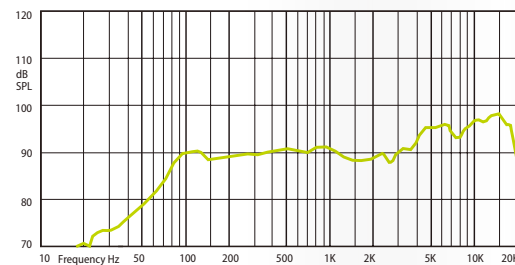

IMPEDANCE

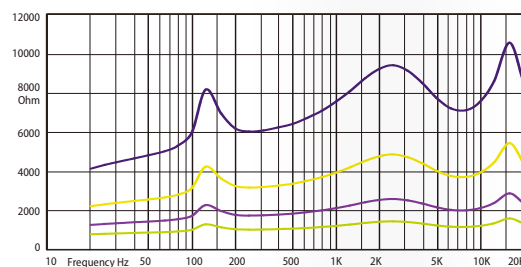


Technical Specifications	PC 5T
Rated power	10 W
Transformer power taps	10 W - 5 W - 2,5 W - 1,25 W
Sensitivity	88 dB (1 W/1 m)
Maximum SPL	98 dB (Pmax/1 m) at 15694 Hz
Frequency response	90 Hz – 20 kHz
Dispersion at 1000 Hz	120° conical
Driver dimensions	5" (130 mm) woofer, 0,5" (13 mm) tweeter, coaxial
Dimensions	ø 190 mm × 70 mm
Weight	1,1 kg
Material	Plastic, Steel grill
Colour	White (RAL 9016)


PC 8T




HORIZONTAL / VERTICAL POLAR DIAGRAMS

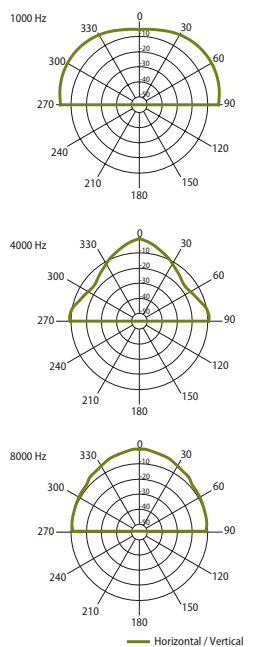

FREQUENCY RESPONSE

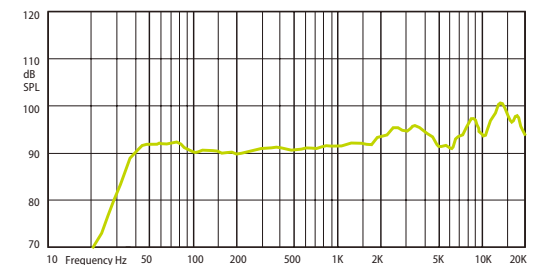

IMPEDANCE

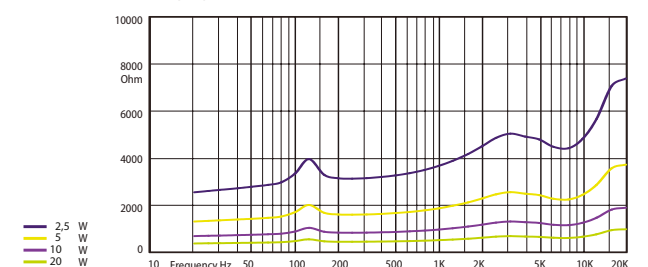

Technical Specifications	PC 8T
Rated power	20 W
Transformer power taps	20 W - 10 W - 5 W - 2,5 W
Sensitivity	88 dB (1 W/1 m)
Maximum SPL	101 dB (Pmax/1 m) at 15249 Hz
Frequency response	80 Hz – 20 kHz
Dispersion at 1000 Hz	120° conical
Driver dimensions	8" (200 mm) woofer, 0,5" (13 mm) tweeter, coaxial
Dimensions	ø 245 mm × 95 mm
Weight	2,1 kg
Material	Plastic, Steel grill
Colour	White (RAL 9016)


CEILING LOUDSPEAKERS

PC Plastic Ceiling Loudspeakers

ABS plastic ceiling loudspeakers with built-in 100V transformer.


PC 5TX & PC 8TX

Like the PC 5T and PC 8T in construction and facilities, these units differ only in as much as they are designed primarily for high quality background music provision.

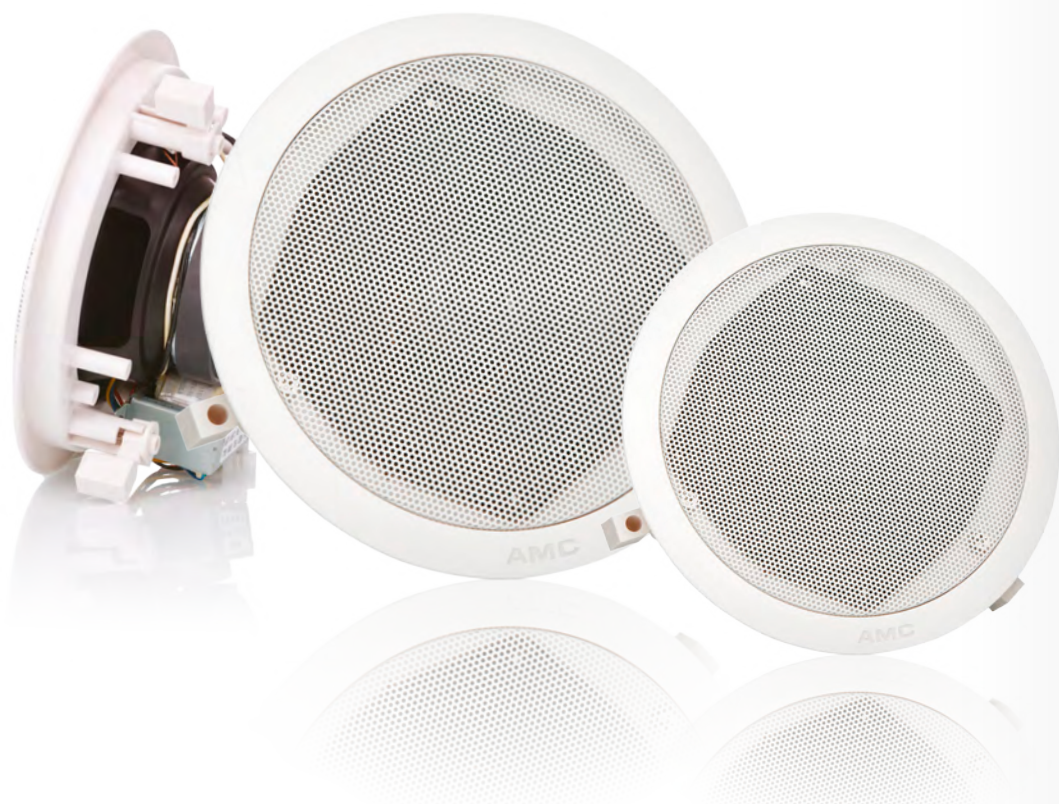


Technical Specifications	PC 5TX	PC 8TX
Rated power	10 W	20 W
Transformer power taps	10 W - 5 W - 2,5 W - 1,25 W	20 W - 10 W - 5 W - 2,5 W
Sensitivity	88 dB (1 W/1 m)	89 dB (1 W/1 m)
Maximum SPL	98 dB (Pmax/1 m) at 884 Hz	102 dB (Pmax/1 m) at 5415 Hz
Frequency response	100 Hz – 20 kHz	60 Hz – 20 kHz
Dispersion at 1000 Hz	120° conical	120° conical
Driver dimensions	5" (130 mm) woofer, 0,5" (13 mm) tweeter, coaxial	8" (200 mm) woofer, 0,5" (13 mm) tweeter, coaxial
Dimensions	ø 190 mm × 80 mm	ø 274 mm × 105 mm
Weight	1,1 kg	2,1 kg
Material	Plastic, Steel grill	Plastic, Steel grill
Colour	White (RAL 9016)	White (RAL 9016)


PC 5TX

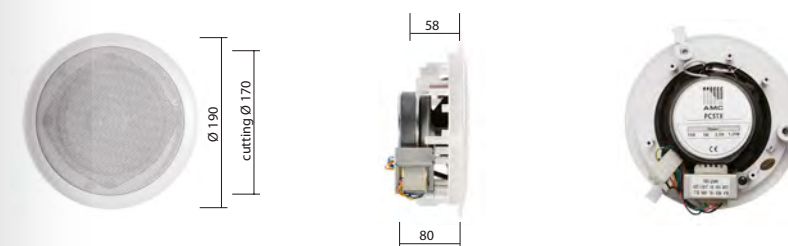


HORIZONTAL / VERTICAL POLAR DIAGRAMS

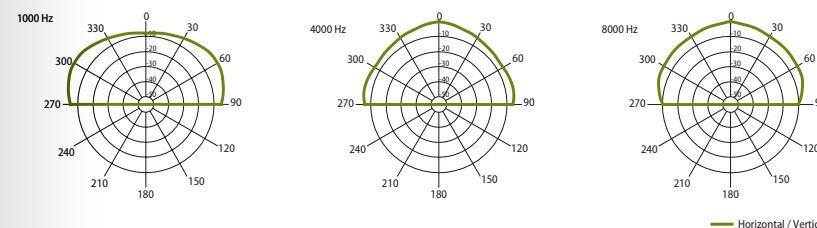


FREQUENCY RESPONSE

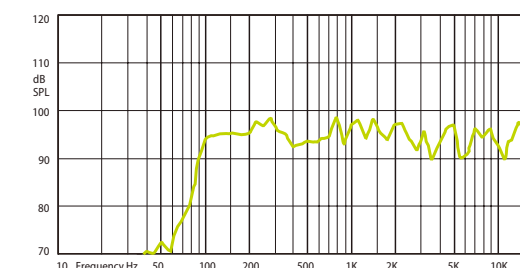


IMPEDANCE

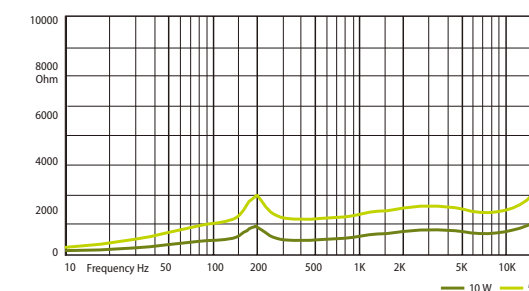


PC 8TX

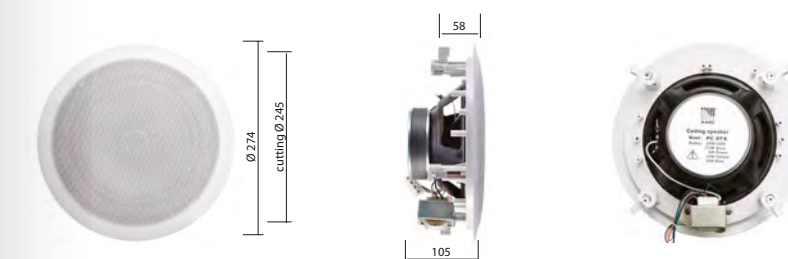


HORIZONTAL / VERTICAL POLAR DIAGRAMS

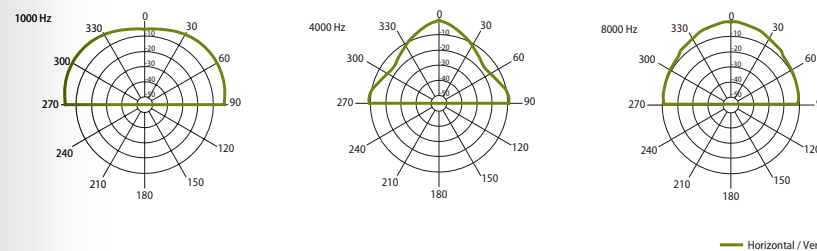

FREQUENCY RESPONSE

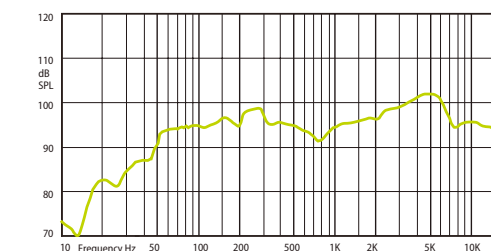

IMPEDANCE

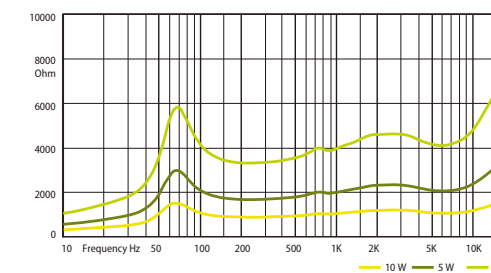



www.amcpro.eu

PA Systems should be heard and not seen.



Simple. Reliable. Profitable.




CEILING LOUDSPEAKERS

PC Plastic Ceiling Loudspeakers

PC - plastic ceiling loudspeakers with built-in 100V transformer.


PC 6T

Cost effective ABS plastic loudspeaker. Designed to be quickly and simply installed into false ceilings. Cost saving solution for PA systems where large amount of speakers is required. Excellent full range loudspeaker for systems where combination of background music and voice announcements are required.




Technical Specifications	PC 6T
Rated power	6 W
Transformer power taps	6 W - 3 W
Sensitivity	93 dB (1 W/1 m)
Maximum SPL	100 dB (Pmax/1m)
Frequency response	100 Hz – 15 kHz
Dispersion at 1000 Hz	180° conical
Driver dimensions	6" (152 mm)
Dimensions	ø 188 mm x 76 mm
Weight	0,7 kg
Material	Plastic, Steel grill
Colour	White (RAL 9016)


HORIZONTAL / VERTICAL POLAR DIAGRAMS

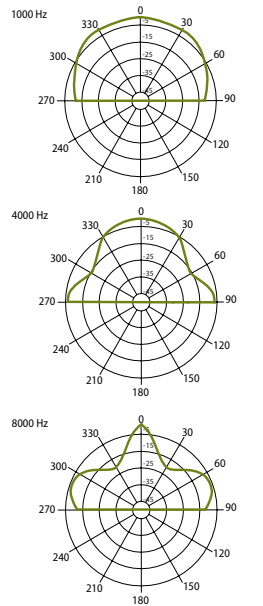

FREQUENCY RESPONSE

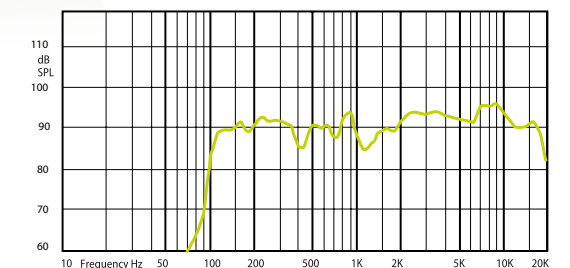

IMPEDANCE

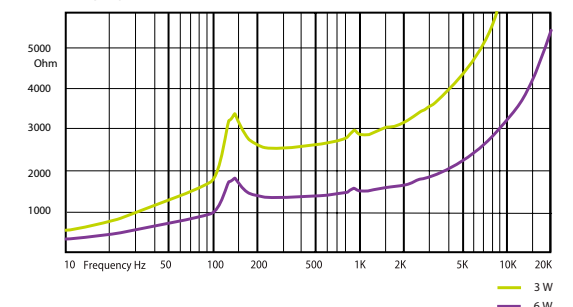

CEILING LOUDSPEAKERS

PC Low Impedance Ceiling Speakers

Low voltage ABS plastic coaxial ceiling loudspeakers.


PC 5X & PC 8X

These loudspeakers are used for low impedance systems only, as the speaker has no built-in transformer. The white plastic enclosure features a steel grill, with a moulded AMC logo and looks elegant and clean. They are best used for background music reproduction in bars, restaurants and hotel lobbies.




Technical Specifications	PC 5X	PC 8X
Rated power	20 W (8 Ω)	40 W (8 Ω)
Sensitivity	88 dB (1 W/1 m)	89 dB (1 W/1 m)
Maximum SPL	101 dB (Pmax/1 m) at 6816 Hz	105 dB (Pmax/1 m) at 6435 Hz
Frequency response	100 Hz – 20 kHz	50 Hz – 20 kHz
Dispersion at 1000 Hz	120° conical	120° conical
Driver dimensions	5" (130 mm) woofer, 0,5" (13 mm) tweeter, coaxial	8" (200 mm) woofer, 0,5" (13 mm) tweeter, coaxial
Dimensions	ø 190 mm × 80 mm	ø 274 mm × 105 mm
Weight	1 kg	1,83 kg
Material	Plastic, Steel grill	Plastic, Steel grill
Colour	White (RAL 9016)	White (RAL 9016)


PC 5X

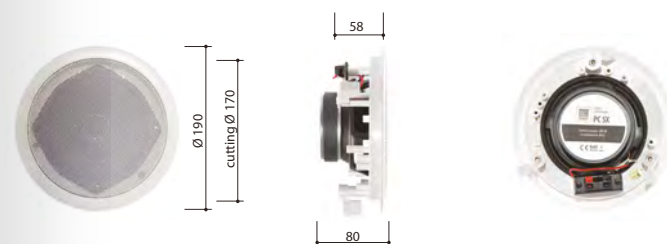


HORIZONTAL / VERTICAL POLAR DIAGRAMS

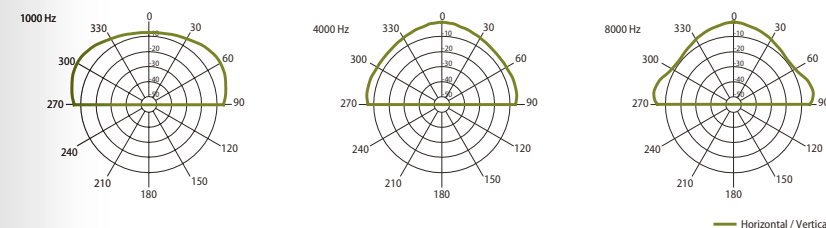


FREQUENCY RESPONSE

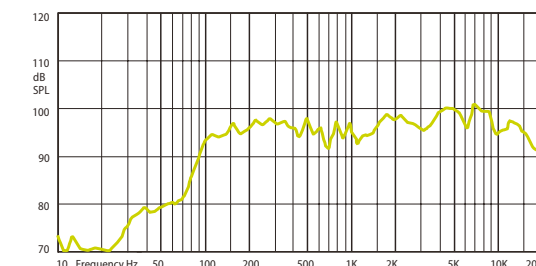


IMPEDANCE

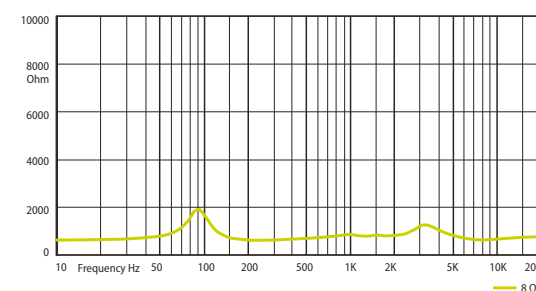


PC 8X

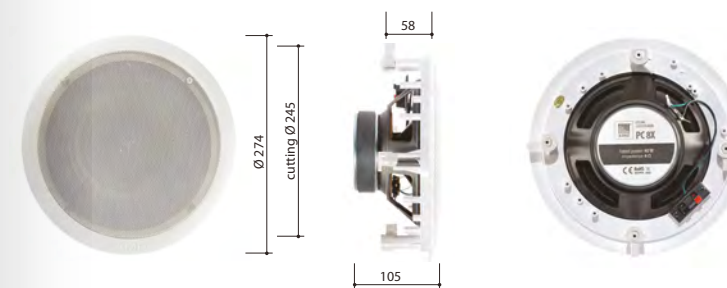


HORIZONTAL / VERTICAL POLAR DIAGRAMS

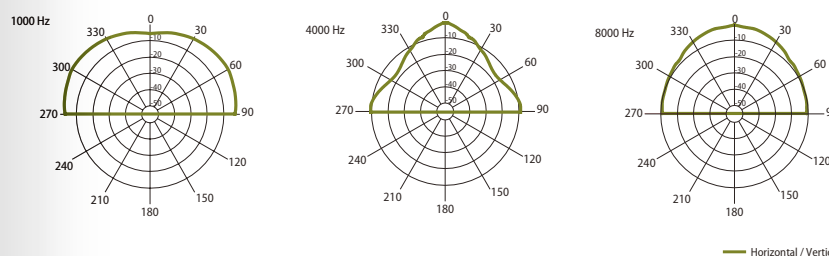

FREQUENCY RESPONSE

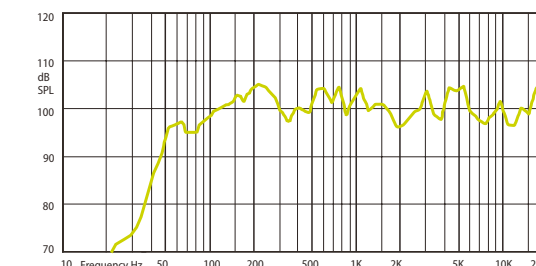

IMPEDANCE

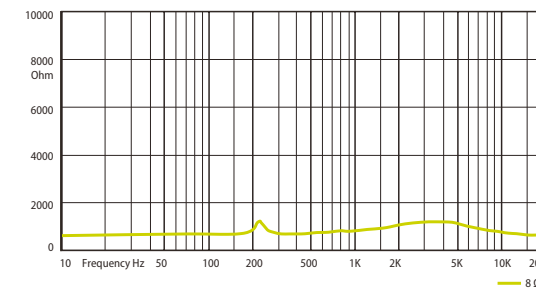

CEILING LOUDSPEAKERS




PC Low Impedance Ceiling Loudspeakers

High performance coaxial ceiling loudspeakers.

PC 6

These specially designed speakers are ideal for back ground music with a high SPL. The enclosures are assembled using high quality materials and coupled to a very high quality coaxial speaker. Used in environments where excellent sound quality and a high SPL is required: bars, restaurants, modern shops.

The clear and neutral design of this enclosure loudspeaker allows it to blend into any interior.

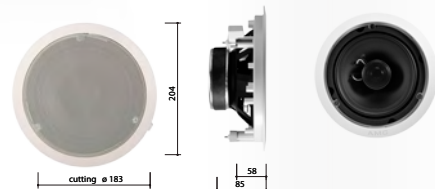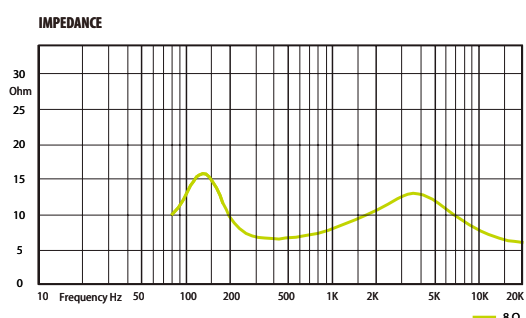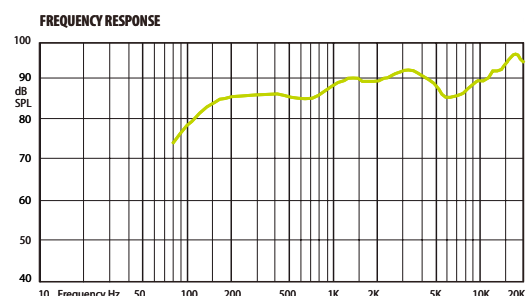

Technical Specifications	PC 6
Rated power	50 W (8 Ω)
Sensitivity	90 dB (1 W/1 m)
Maximum SPL	109 dB (Pmax/1 m) at 2638 Hz
Frequency response	80 Hz – 20 kHz
Dispersion at 1000 Hz	180° conical
Driver dimensions	6" (152mm) woofer, 1,25" (32mm) tweeter
Dimensions	ø 204 mm x 85 mm
Weight	1,4 kg
Material	Housing - ABS plastic, grill - steel
Colour	White (RAL 9016)

PC Low Impedance Ceiling Loudspeakers



High performance coaxial ceiling loudspeakers

PC 6 HP

PC 6HP high performance 8 Ω ceiling loudspeakers for low impedance background music systems. Metal grill with magnetic fixing are specially made with extra slim plastic edge in order to make minimum intervention to interior. Adjustable silk tweeters angle allow precisely match high frequency performance in any living area and let you to choose your preferred kind of high frequency sound: directly or reflected. PC 6HP are specially made without 100V transformers for the excellent clear and dynamic sound. These 35W coaxial loudspeakers can be quickly and simply installed into false ceilings by using four points fastening system. PC 6HP is a strong and powerful sound reproduction loudspeaker that has almost unlimited applications for home background music, as well for public spaces where high quality background music needed.



Technical Specifications	PC 6 HP
Rated power	35 W
Impedance	8 Ω
Sensitivity	86 dB (1 W/1 m)
Maximum SPL	102 dB (Pmax / 1m)
Frequency response	75 Hz - 20 kHz
Dispersion at 1000 Hz	150° conical
Driver dimensions	6,5" (165 mm)
Dimensions	ø 250 mm x 90 mm
Weight	7 kg
Material	Housing - plastic, grill - steel
Colour	White (RAL 9016)

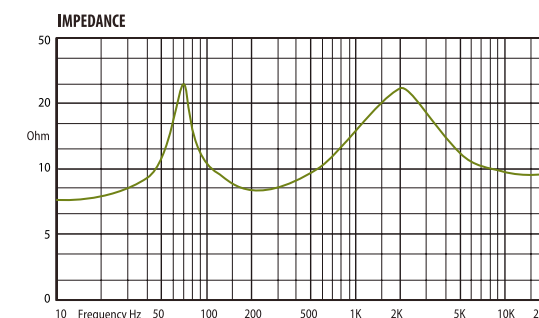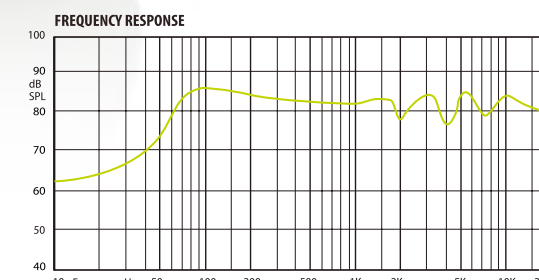

CEILING LOUDSPEAKERS

WP Low Impedance Ceiling Loudspeakers

Weatherproof ceiling loudspeakers


WP 5 & WP 6

WP 5 & WP 6 ceiling loudspeakers - unique combination of clear sound and special design of weatherproofness. Incredibly reliable, durable and universal WP5 & WP6 are 5 and 6 inch two way loudspeakers with plastic speaker membrane, moisture isolated magnet and speaker coil. These loudspeakers are designed for installations in the hard climate conditions and extremely moisture environments. Loudspeaker has removable plastic grill which hides speakers mounting screws and enclosure looks elegant when mounted in ceilings. Designed for low impedance systems. These loudspeakers are ideal solution for background music in SPA centers, indoor pools, showers, sauna and ships.




Technical specifications	WP 5	WP 6
Rated power	40 W	50 W
Impedance	4 Ω	4 Ω
Sensitivity	89 dB (1 W/1 m)	90 dB (1 W/1 m)
Maximum SPL	105 dB (Pmax/1 m)	106 dB (Pmax/1 m)
Frequency response	80 Hz - 20 kHz	70 Hz - 20 kHz
Dispersion at 1000 Hz	120° conical	120° conical
Driver dimensions	5" (130 mm) woofer, 0,5" (13 mm) tweeter, coaxial	6" (152 mm) woofer, 0,5" (13 mm) tweeter, coaxial
Dimensions	ø 165 mm x 90 mm	ø 191 mm x 100 mm
Weight	0,8 kg	1 kg
Material	Plastic	Plastic
Colour	White (RAL 9016)	White (RAL 9016)


WP 5

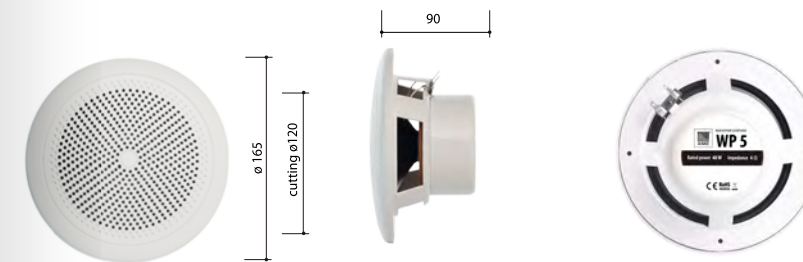


HORIZONTAL / VERTICAL POLAR DIAGRAMS

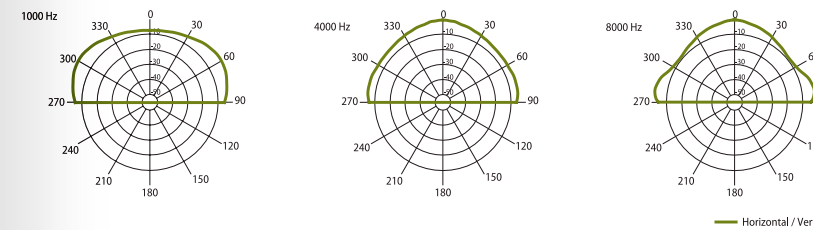


WP 5 FREQUENCY RESPONSE

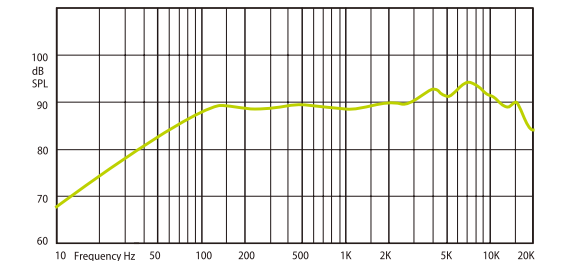


IMPEDANCE

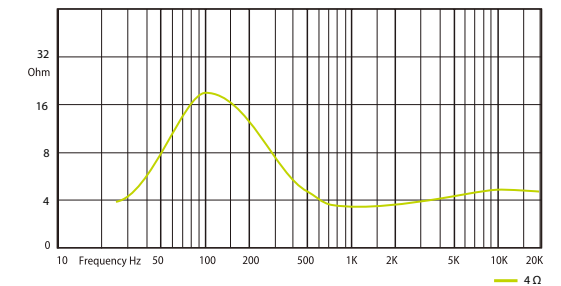


WP 6

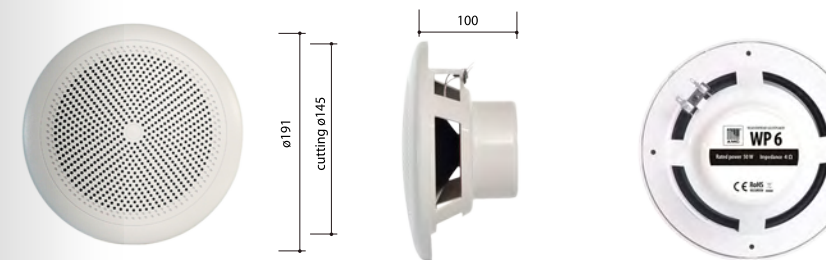


HORIZONTAL / VERTICAL POLAR DIAGRAMS

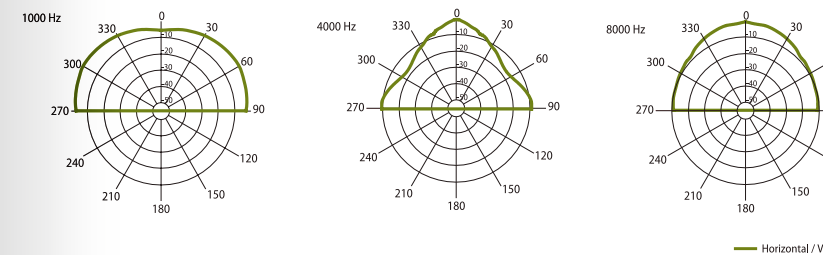

WP 6 FREQUENCY RESPONSE

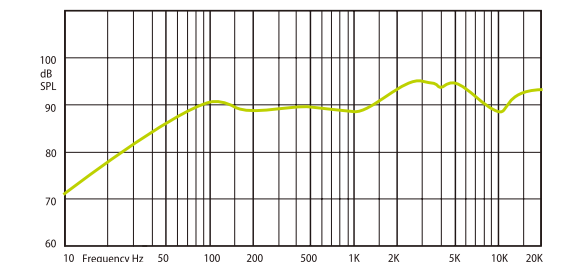

IMPEDANCE

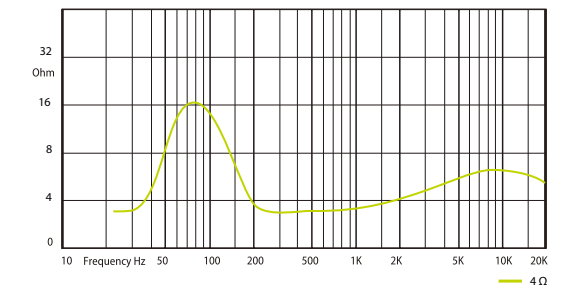

COLUMN LOUDSPEAKERS

COM HP High Performance Column Loudspeakers

COM HP aluminum body high performance outdoor column loudspeakers.

COM 20HP & COM 30HP


Wide frequency response and high SPL loudspeakers. Special bracket for precise speaker mounting.
 Typical application: railway stations, subways, churches, factory buildings, warehouses, parking lots, open air spaces.




Technical Specifications	COM 20 HP
Rated power	20 W
Transformer power taps	20 W - 10 W - 5 W - 2,5 W
Sensitivity	92 dB (1 W/1 m)
Maximum SPL	110 dB (Pmax/1 m) at 14125 Hz
Frequency response	120 Hz – 20 kHz
Dispersion at 1000 Hz	180° (H), 80° (V)
Protection	IP 66
Dimensions	585 mm × 125 mm x 110 mm
Driver dimensions	4 x 3,5" (88 mm) woofer, 0,8" (20 mm) tweeter
Weight	5 kg
Material	Aluminum
Colour	White (RAL 9016)

Technical Specifications	COM 30 HP
Rated power	30 W
Transformer power taps	30 W - 15 W - 7,5 W - 3,75 W
Sensitivity	94 dB (1 W/1 m)
Maximum SPL	112 dB (Pmax/1 m) at 11220 Hz
Frequency response	110 Hz – 20 kHz
Dispersion at 1000 Hz	180° (H), 70° (V)
Protection	IP 66
Dimensions	775 mm × 125 mm x 110 mm
Driver dimensions	6 x 3,5" (88 mm) woofer, 0,8" (20 mm) tweeter
Weight	7 kg
Material	Aluminum
Colour	White (RAL 9016)

COM 20HP

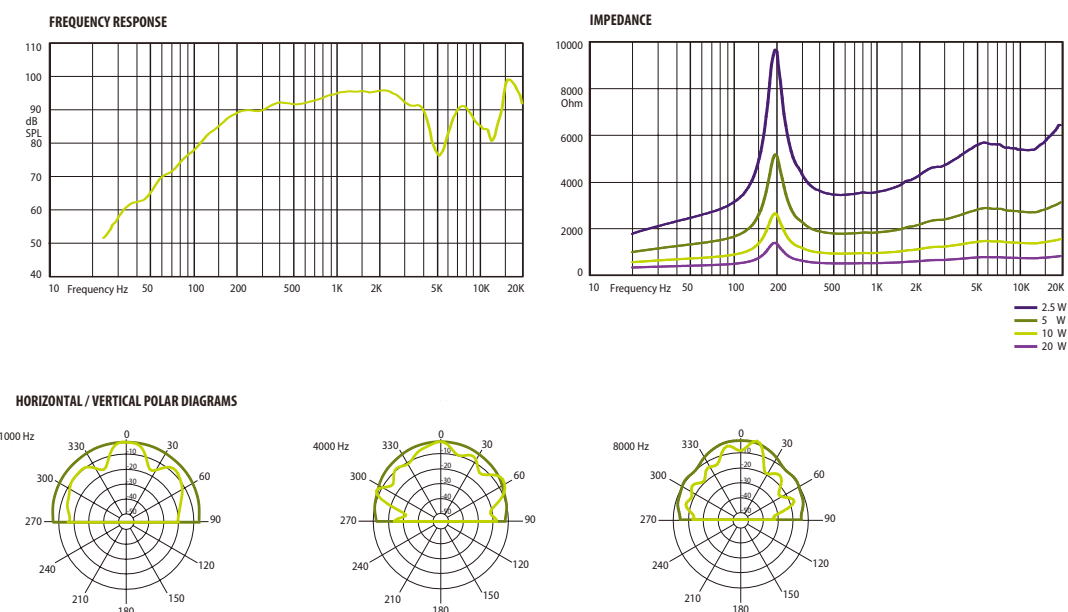

COM 30HP

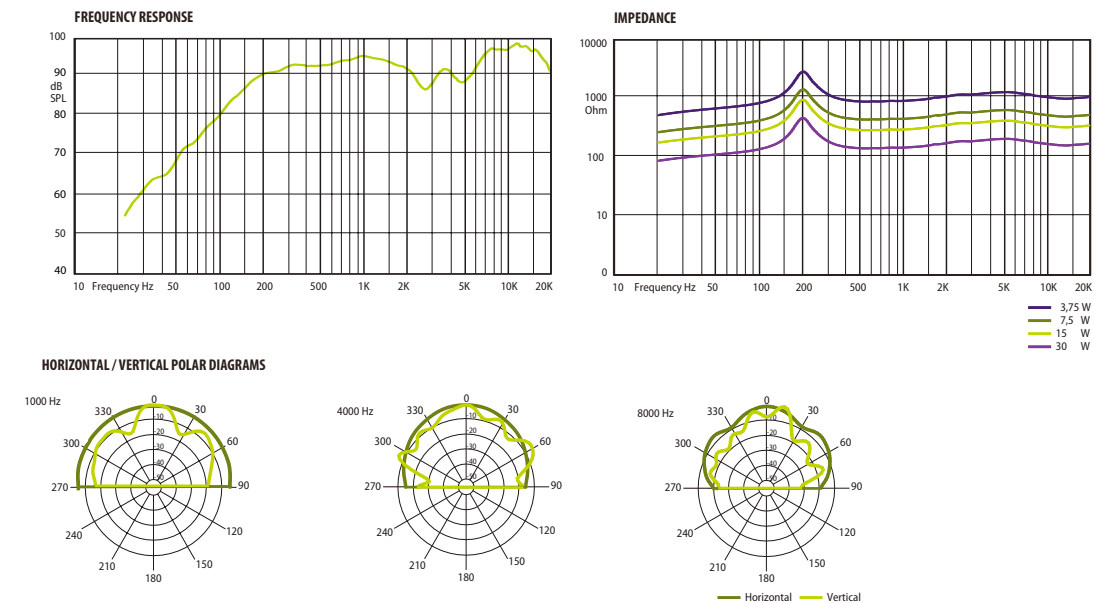

COLUMN LOUDSPEAKERS

COM Weatherproof Column Loudspeakers

COM aluminum body outdoor column loudspeakers.

COM 20 & COM 40

Wide frequency response and high sensitivity loudspeakers are ideal for speech and background music reproduction in large areas, where a simple and reliable solution is needed. Can be used in heavy weather conditions.

COM 20 is manufactured with two 5"(127 mm) full range speakers, **COM 40** has four 5"(127 mm) full range speakers.




Technical Specifications	COM 20	COM 40
Rated power	20 W	40 W
Transformer power taps	20 W - 10 W	40 W - 20 W
Sensitivity	92 dB (1 W/1 m)	94 dB (1 W/1 m)
Maximum SPL	105 dB (Pmax/1 m) at 1179 Hz	110 dB (Pmax/1 m) at 1113 Hz
Frequency response	100 Hz – 15 kHz	100 Hz – 15 kHz
Dispersion at 1000 Hz	180° (H), 150° (V)	180° (H), 150° (V)
Protection	IP 54	IP 54
Dimensions	378 mm × 151 mm x 125 mm	618 mm × 151 mm x 125 mm
Driver dimensions	2 x 5" (127 mm)	4 x 5" (127 mm)
Weight	2,9 kg	4,7 kg
Material	Aluminum	Aluminum
Colour	Grey (RAL 7038)	Grey (RAL 7038)


COM 20




HORIZONTAL / VERTICAL POLAR DIAGRAMS

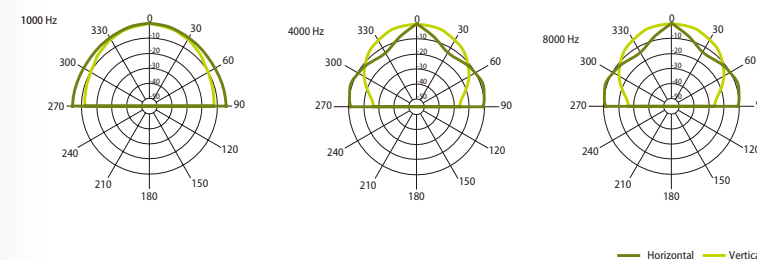


FREQUENCY RESPONSE

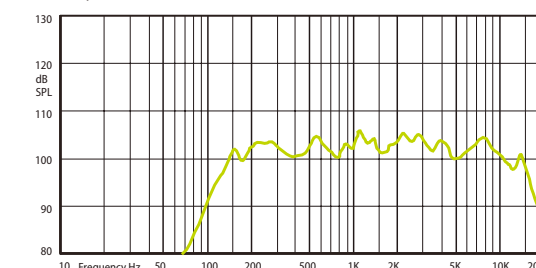


IMPEDANCE

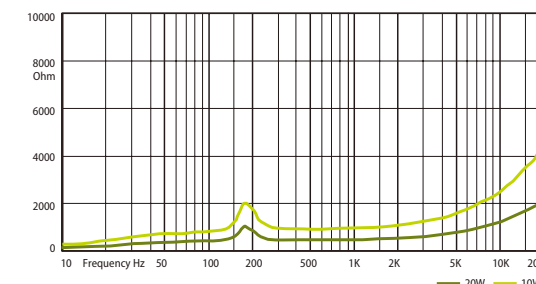


COM 40

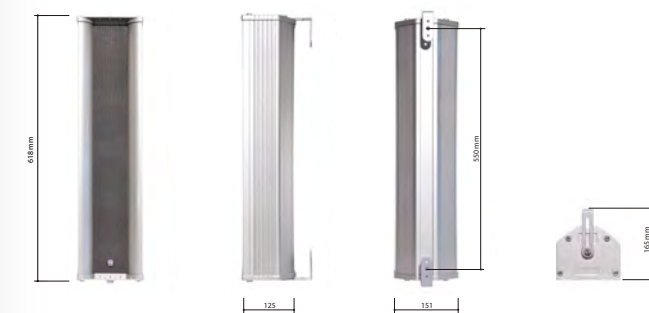


HORIZONTAL / VERTICAL POLAR DIAGRAMS

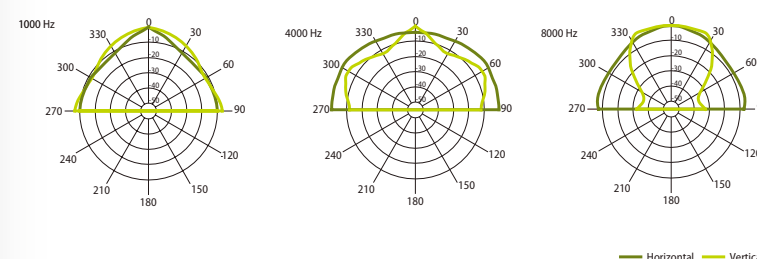

FREQUENCY RESPONSE

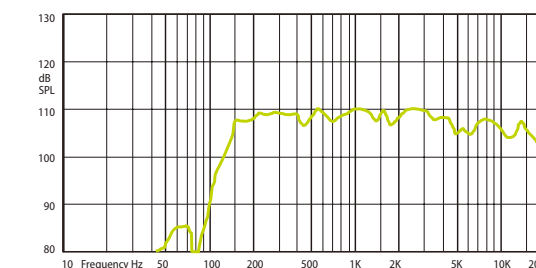

IMPEDANCE

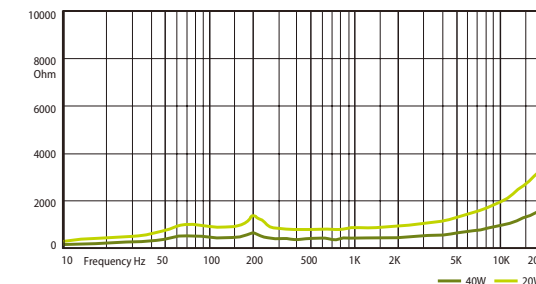

COLUMN LOUSPEAKERS

COM Weatherproof Column Loudspeaker

COM aluminium body outdoor column loudspeakers.

COM 320 & COM 340

Wide frequency response and high sensitivity loudspeakers are used for speech and background music reproduction in large areas. Typical application: railway stations, subways, churches, factory buildings, warehouses and outdoor parking areas. Mainly designed for outdoor areas. **COM 320** utilises two 3"(76.2 mm) full range speakers and one 1"(25 mm) tweeter, **COM 340** has four 3"(76.2 mm) full range speakers and one 1"(25 mm) tweeter.




Technical Specifications	COM 320
Rated power	20 W
Transformer power taps	20 W - 10 W
Sensitivity	89 dB (1 W/1 m)
Maximum SPL	105 dB (Pmax/1 m) at 2440 Hz
Frequency response	135 Hz – 20 kHz
Dispersion at 1000 Hz	180° (H), 80° (V)
Protection	IP 66
Dimensions	370 mm × 110 mm x 97 mm
Driver dimensions	2 x 3" (76,2 mm) woofer, 1" (25,4 mm) tweeter
Weight	2,6 kg
Material	Aluminum
Colour	White (RAL 9016)

Technical Specifications	COM 340
Rated power	40 W
Transformer power taps	40 W - 20 W
Sensitivity	90 dB (1 W/1 m)
Maximum SPL	107 dB (Pmax/1 m) at 13335 Hz
Frequency response	135 Hz – 20 kHz
Dispersion at 1000 Hz	180° (H), 50° (V)
Protection	IP 66
Dimensions	545 mm × 110 mm x 97 mm
Driver dimensions	4 x 3" (76,2 mm) woofer, 1" (25,4 mm) tweeter
Weight	3,6 kg
Material	Aluminum
Colour	White (RAL 9016)


COM 320




HORIZONTAL / VERTICAL POLAR DIAGRAMS

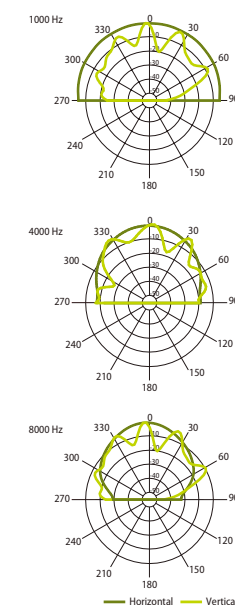


FREQUENCY RESPONSE

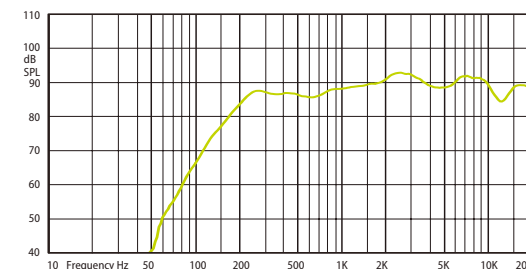


IMPEDANCE

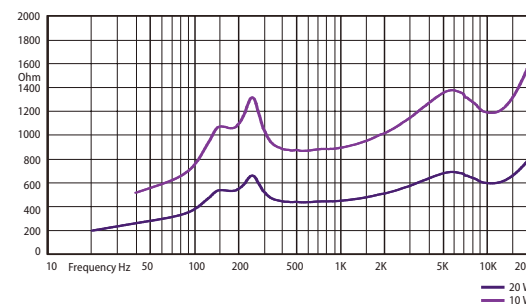


COM 340

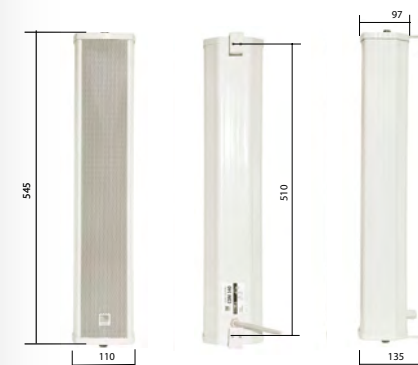


HORIZONTAL / VERTICAL POLAR DIAGRAMS

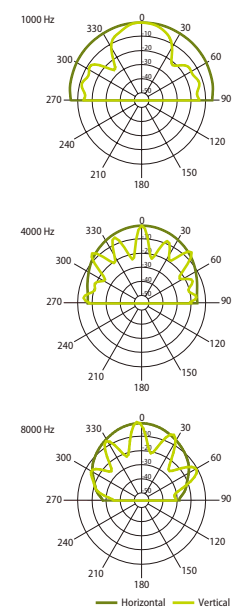

FREQUENCY RESPONSE

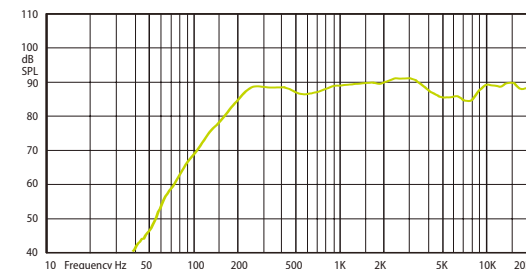

IMPEDANCE

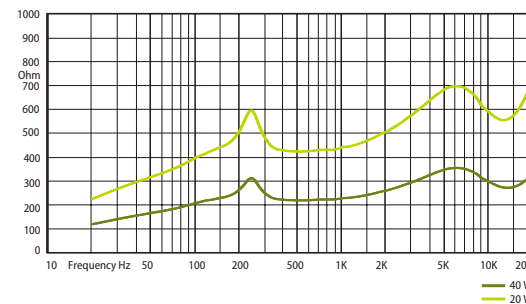

COLUMN LOUDSPEAKERS

COM Weatherproof Column Loudspeakers

COM aluminium body outdoor column loudspeakers



COM 420 & COM 440

Wide frequency response and high sensitivity loudspeakers are used for speech and background music reproduction in large areas. Typical application: railway stations, subways, churches, factory buildings, warehouses and outdoor parking areas. Mainly designed for use in outdoor areas. **COM 420** has built-in two 4" (101.2 mm) full range speakers and one 1,5" (38,1 mm) tweeter, **COM 440** uses four 4" (101.2 mm) full range speakers and one 1,5" (38,1 mm) tweeter.




Technical Specifications	COM 420	COM440
Rated power	20 W	40 W
Transformer power taps	20 W - 10 W	40 W - 20 W
Sensitivity	91 dB (1 W/1 m)	92 dB (1 W/1 m)
Maximum SPL	108 dB (Pmax/1 m) at 2900 Hz	110 dB (Pmax/1 m) at 8414
Frequency response	120 Hz – 20 kHz	120 Hz – 20 kHz
Dispersion at 1000 Hz	180° (H), 60° (V)	180° (H), 140° (V)
Protection	IP 66	IP 66
Dimensions	425 mm × 150 mm x 125 mm	655 mm × 150 mm x 125 mm
Driver dimensions	2 x 4" (101,2 mm) woofer, 1,5" (38,1 mm) tweeter	4 x 4" (76,2 mm) woofer, 1,5" (38,1 mm) tweeter
Weight	3,9 kg	5,9 kg
Material	Aluminum	Aluminum
Colour	White (RAL 9016)	White (RAL 9016)



COM 420

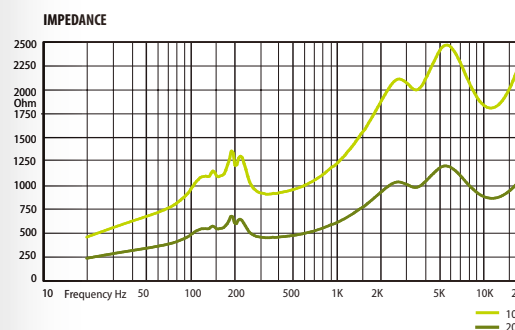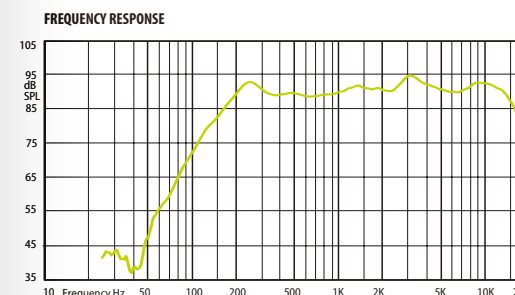


HORIZONTAL / VERTICAL POLAR DIAGRAMS

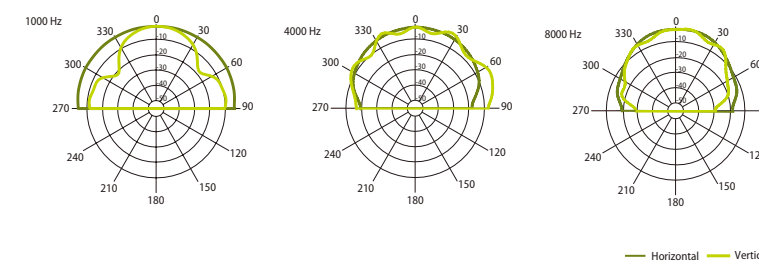

COM 440

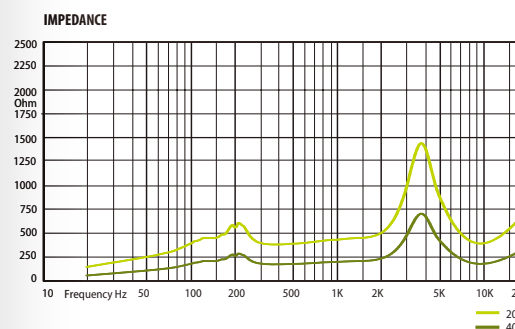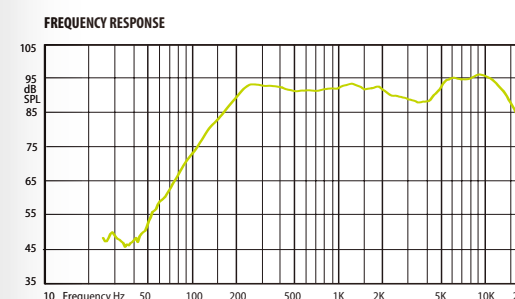

HORIZONTAL / VERTICAL POLAR DIAGRAMS


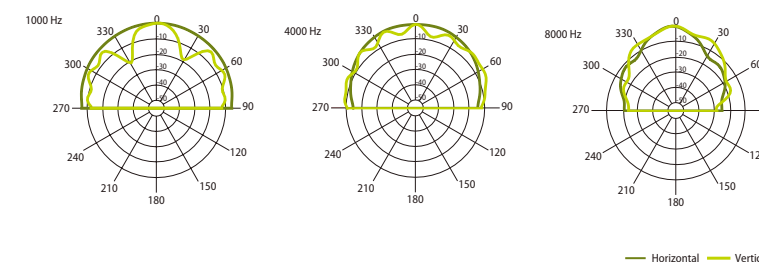


COLUMN LOUDSPEAKERS
COM SLIM Column Loudspeakers


COM SLIM 30 ultra slim body column loudspeaker
 appropriate for sensitive interiors with high reverberation time.

COM SLIM 30

Slim body loudspeaker. The speaker is designed for use in the areas with high reverberation time, like churches, train stations or market halls. The speaker is elegant designed for very neutral appearance in the sensitive interiors. COM SLIM 30 is equipped with four 2" (51 mm) woofers, and one 2" (51 mm) tweeter. Mounting bracket is included.

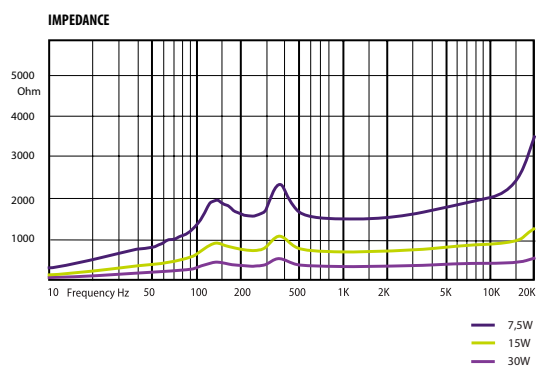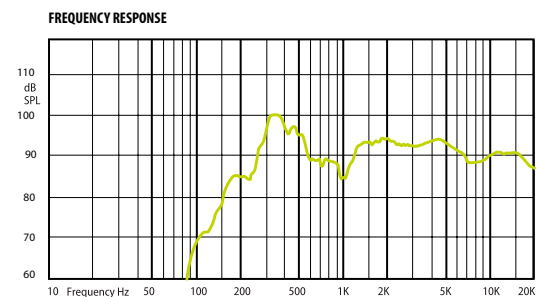

HORIZONTAL / VERTICAL POLAR DIAGRAMS

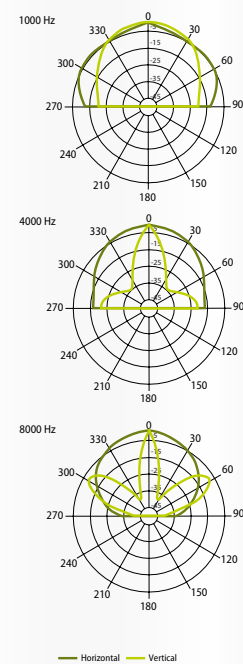

Technical Specifications	COM SLIM 30
Rated power	30 W
Transformer power taps	30 W - 15 W - 7,5 W - 8 Ω
Sensitivity	91 dB (1W/1m)
Maximum SPL	108 dB (Pmax / 1m) at 1995 Hz
Frequency response	180 Hz - 18 kHz
Dispersion at 1000 Hz	140° (H), 80° (V)
Protection	IP 55
Driver dimensions	4 x 2" (50 mm) woofer, 1 x 1" (25 mm) tweeter
Dimensions	405 mm x 75 mm x 69 mm
Weight	1,7 kg
Material	Aluminum
Colour	White (RAL 9016)



www.amcpro.eu



PA Systems should be
 heard and not seen.



Simple. Reliable. Profitable.

HORN LOUDSPEAKERS

H Aluminium Body Horn Loudspeakers


H15 aluminium body outdoor 15W horn speaker with integrated 100V line transformer

H 15


Traditional design, robust construction and high SPL mean these horn speakers are ideal for use in large and medium-size public address and voice evacuation systems, where a high efficiency of speech announcements is required. Specific frequency bandwidth and high SPL makes them ideal for use in noisy environments.




HORIZONTAL / VERTICAL POLAR DIAGRAMS

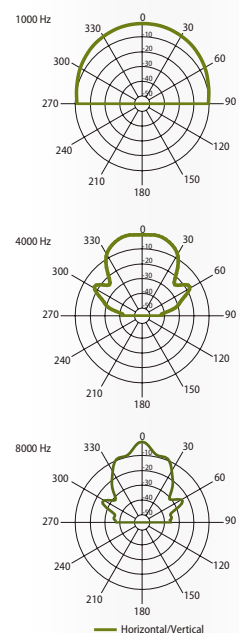

FREQUENCY RESPONSE

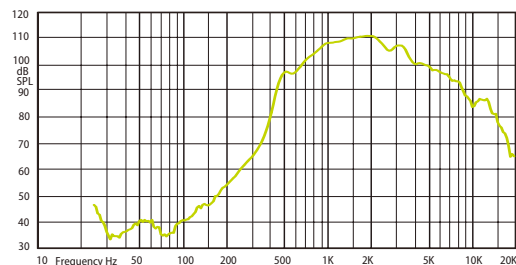

IMPEDANCE

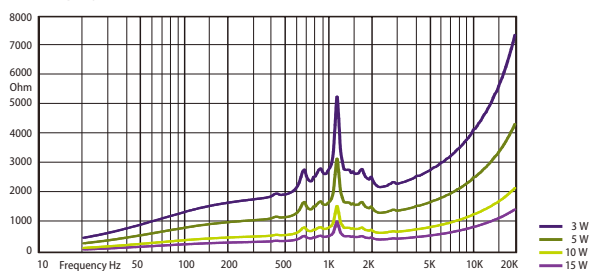

Technical Specifications	H 15
Rated power	15 W
Transformer power taps at 100 V	15 W - 10 W - 5 W - 3 W
Sensitivity	103 dB (1 W/1 m)
Maximum SPL	118 dB (Pmax/1 m) at 1631 Hz
Frequency response	400 Hz – 8 kHz
Dispersion at 1000 Hz	140° conical
Driver dimensions	2" (50mm)
Protections	IP 65
Dimensions	ø200 mm x 241 mm
Weight	1,3 Kg
Material	Aluminum horn and U type bracket
Colour	White (RAL 9018)

HORN LOUDSPEAKERS

HQ Voice Evacuation Plastic Horn Loudspeakers EN54-24 certified


HQ 10EN robust high SPL outdoor horn loudspeaker certified according to EN54-24 standard.

HQ 10EN


HQ 10EN is designed for use in voice evacuation and voice alarm applications for clear and intelligible voice announcements. 105 dB sensitivity allows to use these horn speakers in noisy and large environments. Built-in ceramic terminal and thermal fuse ensuring faultless operation in case of an emergency situation. Horn speaker is certified by Intertek.




HORIZONTAL / VERTICAL POLAR DIAGRAMS

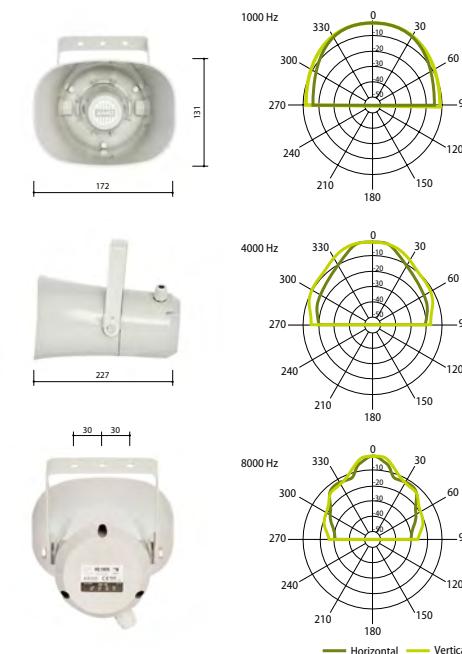

FREQUENCY RESPONSE

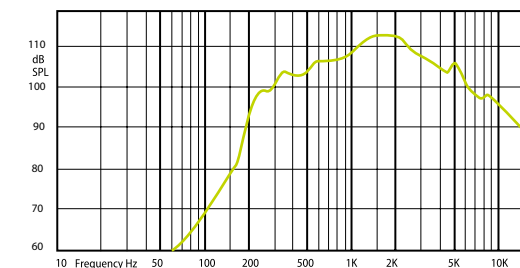

IMPEDANCE

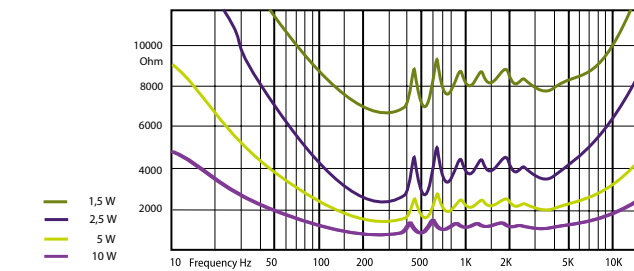

Technical Specifications	HQ 10EN
Rated power	10 W
Transformer power taps	10 W - 5 W - 2,5 W - 1,25 W
Sensitivity	105 dB (1 W/1 m)
Maximum SPL	115 dB (Pmax/1 m) at 1 kHz
Frequency response	340 Hz – 16 kHz
Dispersion at 1000 Hz	80° (H) x 105° (V)
Protection	IP 33
Dimensions	172 mm x 131 mm x 227 mm
Weight	1,6 kg
Material	Plastic horn, U type steel bracket
Colour	Light grey (RAL 7035)

HORN LOUDSPEAKERS

HQ Plastic Horn Loudspeakers

HQ - reliable and powerful outdoor horn loudspeaker.



HQ10, HQ15 & HQ30

Improved quality plastic horn speakers with extremely high SPL and a powerful middle range frequency response. Well suited for indoor and outdoor installation. For voice evacuation and paging systems. With U-mounting bracket.





Technical Specifications	HQ 10	HQ 15	HQ 30
Rated power	10 W	15 W	30 W
Transformer power taps	10 W - 5 W	15 W - 7,5 W	30 W - 15 W
Sensitivity	103 dB (1 W/1 m)	105 dB (1 W/1 m)	105 dB (1 W/1 m)
Maximum SPL	116 dB (Pmax/1 m) at 1412 Hz	117 dB (Pmax/1 m) at 1815 Hz	120 dB (Pmax/1 m) at 1249 Hz
Frequency response	500 Hz – 8 kHz	400 Hz – 5 kHz	400 Hz – 6 kHz
Dispersion at 1000 Hz	140° (H), 90° (V)	140° (H), 90° (V)	140° (H), 90° (V)
Protection	IP 65	IP 66	IP 66
Dimensions	190 mm × 180 mm x 130 mm	222 mm × 162 mm x 232 mm	285 mm × 280 mm x 205 mm
Weight	1,1 kg	1,4 kg	1,8 kg
Material	Plastic horn, U type steel bracket	ABS plastic, U type steel bracket	ABS plastic, U type steel bracket
Colour	White (RAL 9018)	White (RAL 9018)	White (RAL 9018)



HQ 10

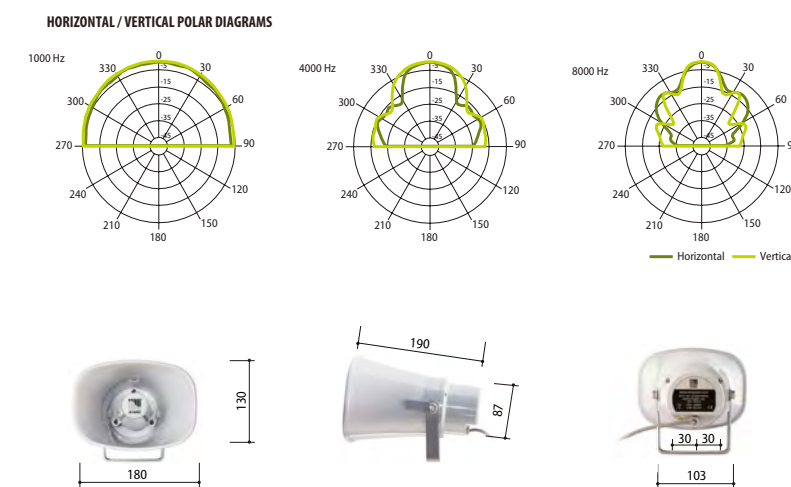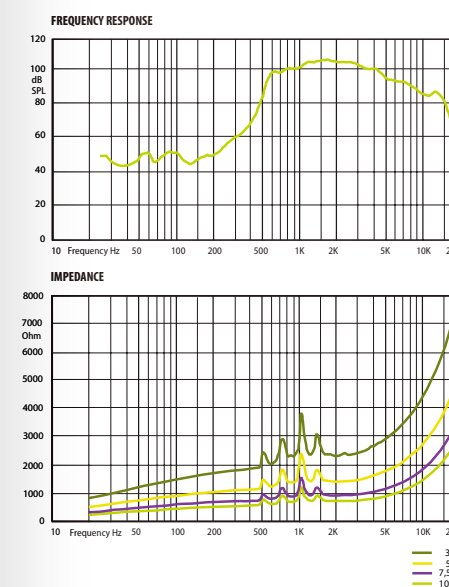

HQ 15

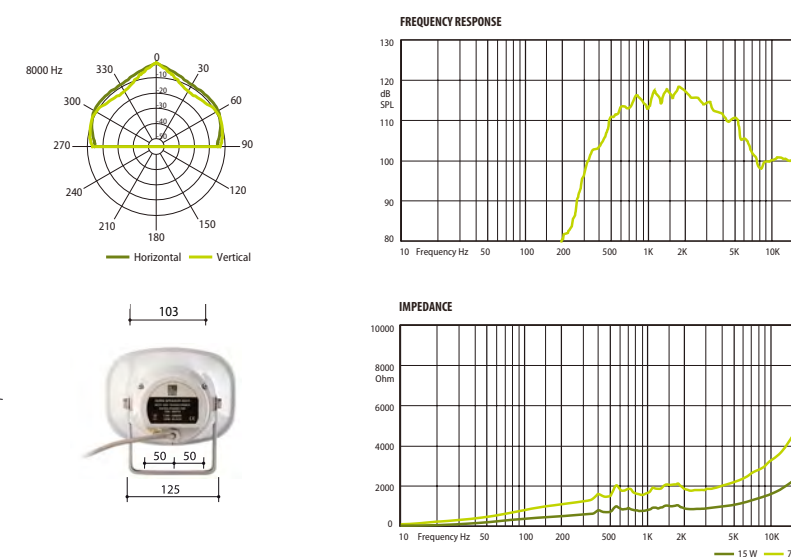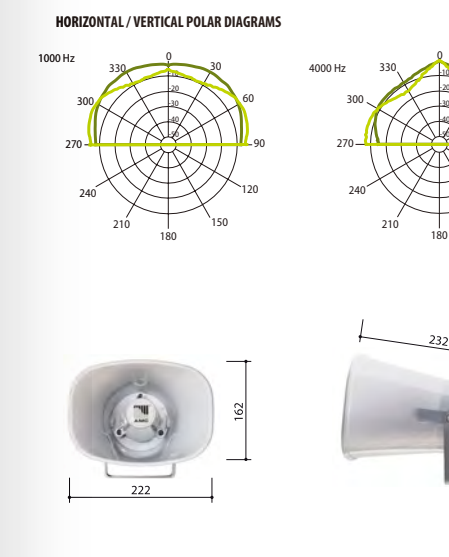

HQ 30

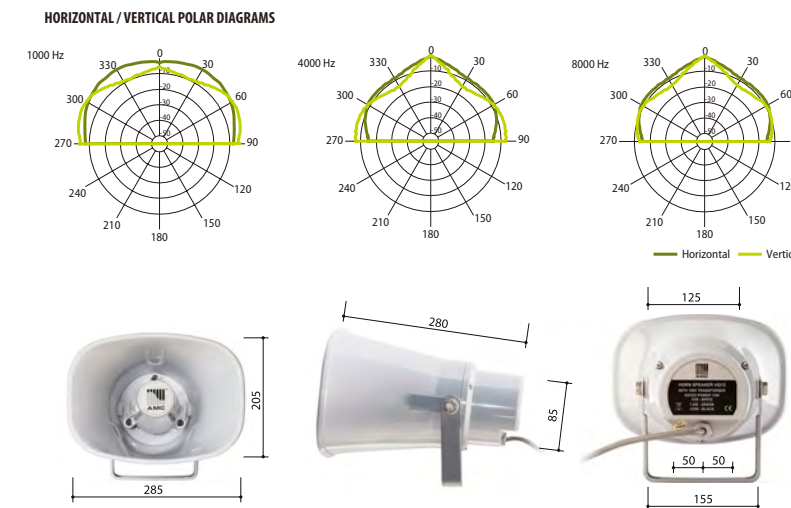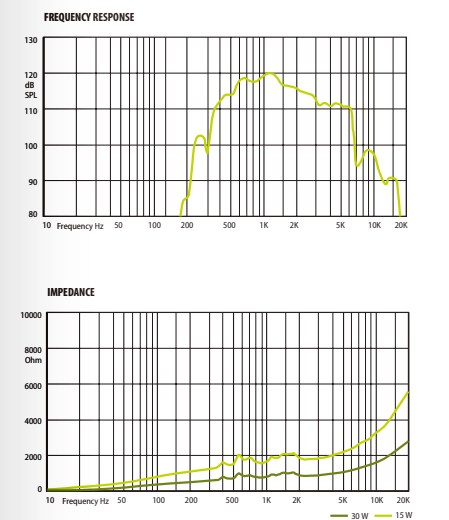



HORN LOUDSPEAKERS

MH Two-Way Plastic Horn Loudspeakers

Waterproof horn loudspeaker with extremely wide frequency response and high SPL level.

MH 50

Wide frequency response allows this speaker to be used for background music. Built-in 100V transformer with power taps and 8Ω input selection, grey colour body, U-mount included. For indoor and outdoor use, where background music is a priority.

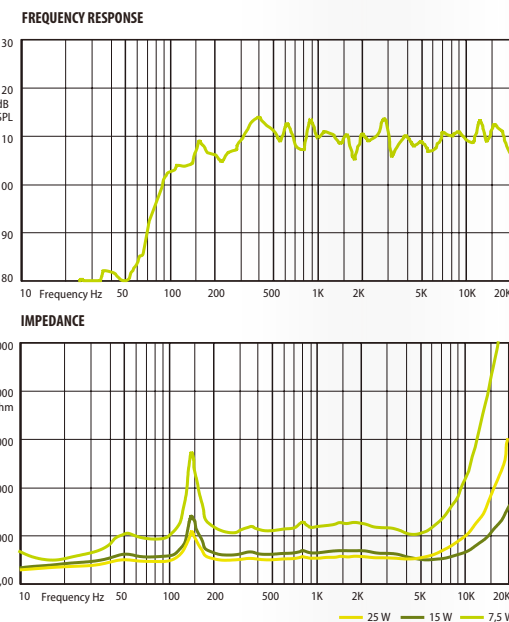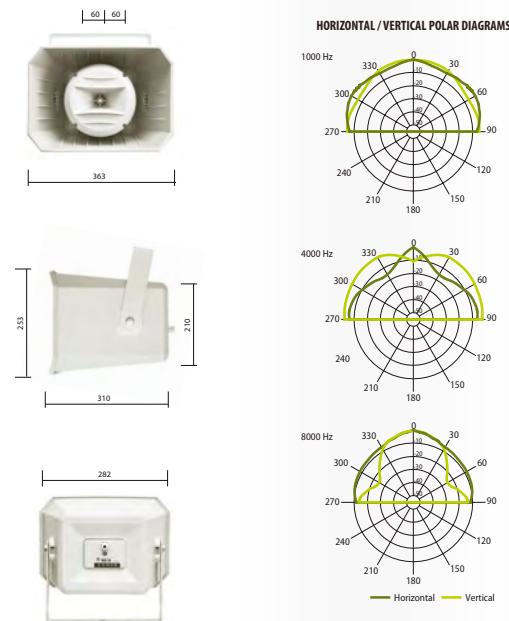

Technical Specifications	MH 50
Rated power	50 W (8 Ω)
Transformer power taps	50 W - 25 W - 12,5 W - 8 Ω
Sensitivity	99 dB (1 W/1 m)
Maximum SPL	115 dB (Pmax/1 m) at 2715 Hz
Frequency response	90 Hz – 20 kHz
Dispersion at 1000 Hz	110° (H), 70° (V)
Protection	IP 55
Dimensions	363 mm × 253 mm x 310 mm
Weight	3,9 kg
Material	ABS plastic, U type aluminum bracket
Colour	Cold grey (RAL 7035)

HORN LOUDSPEAKERS



MHQ Two-Way Plastic Horn Loudspeakers

Music horn speaker with wide frequency response and improved protection against water and dust.


MHQ 60X

2-way plastic music horn loudspeakers with high SPL and improved linearity. Engineered to provide the highest quality music and speech reproduction, where long throw in large areas is required.

MHQ is a reliable and powerful horn speaker with built-in 100V transformer with power taps.

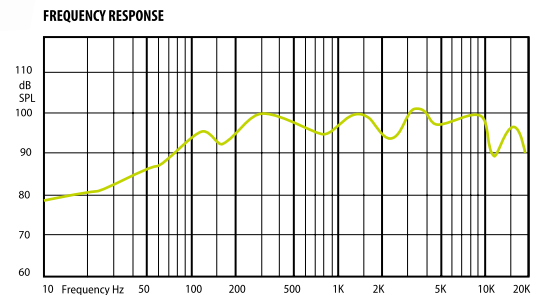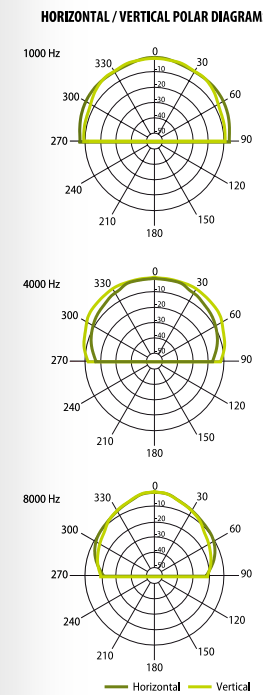

Technical Specifications	MHQ 60X
Rated power	60 W
Transformer power taps	60 W - 30 W - 15 W
Sensitivity	93 dB (1W/1m)
Maximum SPL	115 dB (Pmax/1m) at 1496 Hz
Frequency response	98 Hz - 18 kHz
Dispersion at 1000	120° (H), 80° (V)
Protection	IP 66
Dimensions	367 mm × 255 mm x 293 mm
Weight	6,2 kg
Material	ABS plastic, U type aluminum bracket
Colour	Light grey (RAL 7035)

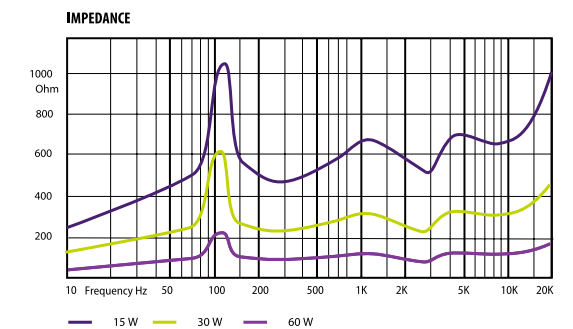

POWERED CABINET LOUDSPEAKERS
POWER BOX 5 Powered Systems


Powered small size speaker boxes for installed sound applications.

POWER BOX 5


Power Box 5 is a set of 2 loudspeakers: a powered loudspeaker with a built-in stereo amplifier and a non-powered loudspeaker ready to be connected to the powered loudspeaker. 5.25" woofer and 1" tweeter, tone control, stereo/mono switch. U-mounting bracket is included in the set. Perfect choice for small installations in a classroom, or for communication and paging systems. Available in two colours: RAL9016 (white) and RAL9017 (black).




HORIZONTAL / VERTICAL POLAR DIAGRAMS

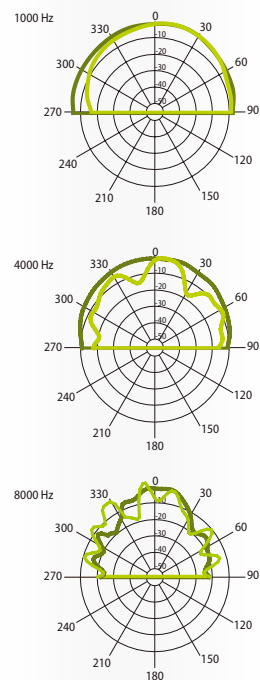

FREQUENCY RESPONSE

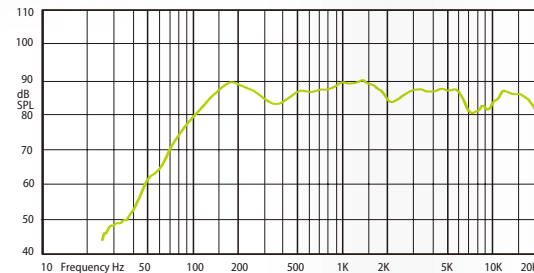

IMPEDANCE

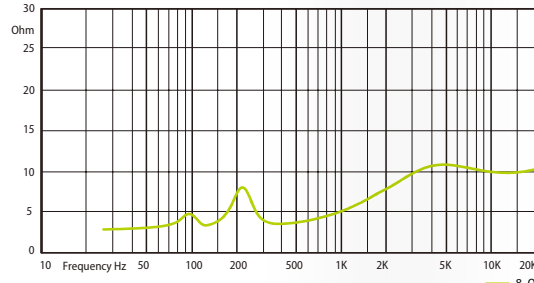

Technical Specifications	POWER BOX 5
Rated power	2 x 20 W
Equalization	2 bands EQ ± 14 dB
Sensitivity	87 dB (1 W/1 m)
Maximum SPL	104 dB (Pmax/1 m) at 1258 Hz
Amplifier frequency response	80 Hz – 20 kHz
Input sensitivity	-7 dBu
Speakers impedance	8 Ω
Dispersion	160° (H), 120°(V)
Driver dimensions	5,25" (133 mm) woofer, 1" (24 mm) tweeter
Dimensions	240 mm x 178 mm x 170 mm
Weight	6 kg
Material	Housing - plastic, grill and U-bracket - steel
Colour	White (RAL 916) Black (RAL 9017)

POWERED CABINET LOUDSPEAKERS
POWER BOX 5HP Powered Systems


Powered small size speaker boxes for installed sound applications.

POWER BOX 5HP


Power Box 5HP is high performance active speaker system with the amplifier built into the main speaker, while other one loudspeaker is passive and connected as a slave unit. For production of these speakers have been used high quality materials. Bass, treble and volume control with direct access on the loudspeakers rear. U-bracket for mounting on the wall and IR remote control are included. This system is a good choice for small installations in classrooms and for use in communication and paging systems.




HORIZONTAL / VERTICAL POLAR DIAGRAMS

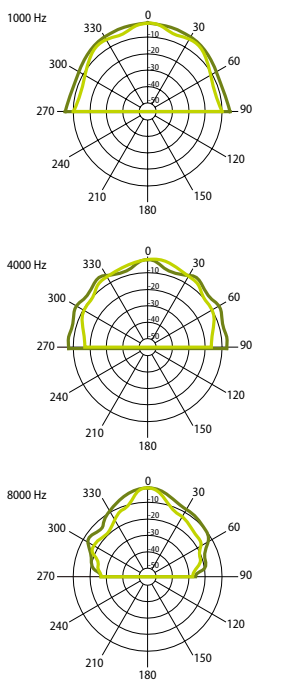

FREQUENCY RESPONSE

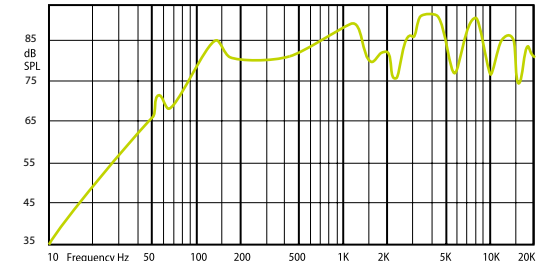

IMPEDANCE

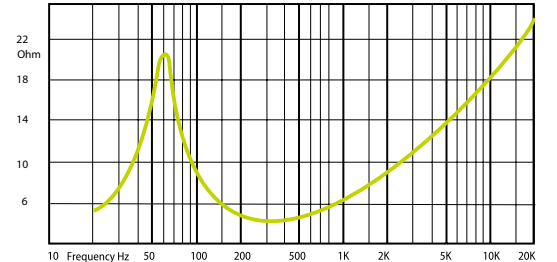

Technical Specifications	POWER BOX 5HP
Rated power	2 x 20 W
Equalization	2 bands EQ ± 14 dB
Sensitivity	85 dB (1W / 1m)
Maximum SPL	98 dB (Pmax / 1m) at 4097 Hz
Frequency response	115 Hz - 20 kHz
Input sensitivity	-3 dBu
Speakers impedance	6 Ω
Dispersion 1000 Hz	120° (H), 100°(V)
Driver dimensions	5" (127 mm) woofer, 1" (25 mm) tweeter
Dimensions	230 mm x 145 mm x 145 mm
Weight	3,45 kg
Material	Housing - plastic, U type mounting bracket - steel
Colour	White (RAL 9003)

PROFESSIONAL MUSIC LOUDSPEAKERS
MUSIC BOX Powered loudspeakers


Powered plastic enclosure loudspeakers.

MUSIC BOX D12


Music box D12 two-way 12" active plastic enclosure loudspeaker with built in USB, SD/MMC player and IR remote control. Tone control. Clip, signal and power indication. 12" woofer and 1.5" tweeter. Built in passive crossover. Class D amplifiers power: 150W, frequency response: 45 Hz - 20 kHz. USB flash drive and SD/MMC card player supports compressed audio files. Balanced microphone input and line input. Light plastic cabinet with hanging support eyelets, pole socket for speaker stand, black colour.



HORIZONTAL / VERTICAL POLAR DIAGRAMS

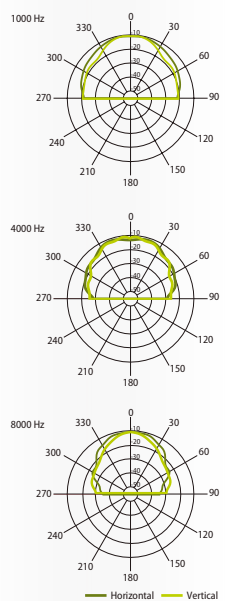

Technical Specifications	MUSIC BOX D12
Rated power	150 W
Equalization	2 bands EQ ± 15 dB
Amplifier frequency response	45 Hz – 20 kHz
Crossover frequency	3,5 kHz
Input sensitivity	Microphone input: - 42 dB , line input: -10 dB
Input impedance	Microphone input: 3,6 kΩ , line input: 10 kΩ
Signal to noise ratio	> 65 dB
THD	< 1 % on the rated power output
LF speakers sensitivity	94 dB (1W/1m)
HF speakers sensitivity	104 dB (1W/1m)
Maximu SPL	120 dB
Speakers impedance	8 Ω
Dispersion	130° (H), 60° (V)
Driver size	12" (300 mm) woofer, 1,5" (38 mm) tweeter
Dimensions	615 mm x 400 mm x 320 mm
Music sources	USB fash, SD/MMC card
Material	Housing - plastic, grill - steel
Weight	15 kg
Colour	Black (RAL 9017)

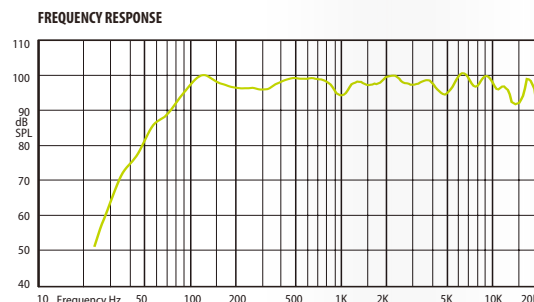

PROFESSIONAL MUSIC LOUDSPEAKERS
POWER BOX Powered Loudspeakers


12" 150W powered speaker system with integrated class D power amplifier.

POWER BOX D12


A modern cabinet design, giving clear and powerful sound reproduction. 2 band EQ, line and microphone inputs, power and peak LED indicators provide for easy control and set up of the sound system.



HORIZONTAL / VERTICAL POLAR DIAGRAMS

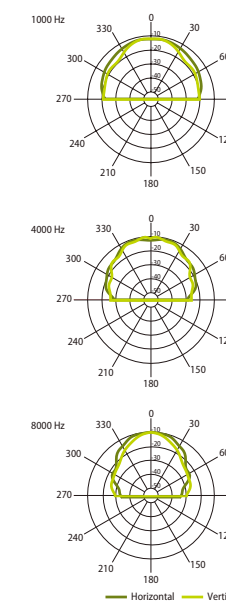

Technical Specifications	POWER BOX D12
Rated power	150 W
AC power consumption on rated power	230 W
Equalization	2 bands EQ ± 15 dB
Amplifier frequency response	60 Hz – 20 kHz
Crossover frequency	3,5 kHz
Input sensitivity	Microphone input: - 42 dB , line input: -10 dB
Input impedance	Microphone input: 3,6 kΩ , line input: 10 kΩ
Signal to noise ratio	> 65 dB
THD	< 1 % on the rated power output
LF speakers sensitivity	94 dB (1W/1m)
HF speakers sensitivity	104 dB (1W/1m)
Speakers impedance	8 Ω
Dispersion	130° (H), 60° (V)
Driver size	12" (300 mm) woofer, 1,5" (38 mm) tweeter
Dimensions	615 mm x 400 mm x 320 mm
Material	Housing - plastic, grill - steel
Colour	Black (RAL 9017)

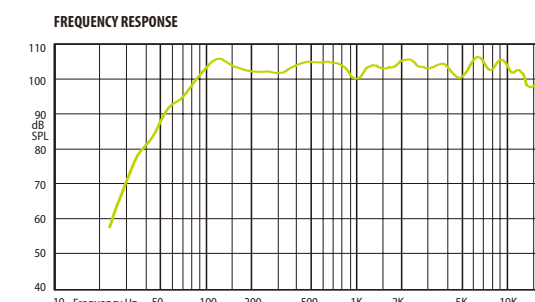

PROFESSIONAL MUSIC LOUDSPEAKERS

SPEAKER BOX


Passive plastic enclosure loudspeakers.

SPEAKER BOX D12


Speaker box D12 two-way 12" passive plastic enclosure loudspeaker. Light plastic cabinet with hanging support eyelets. Pole socket for speaker stand, 12" woofer and 1.5" tweeter, 8Ω impedance. Internal 2-way crossover allows to connect these loudspeakers to the amplifiers without any sound processing. Speakon input and link connectors. Black colour cabinet with perforated metal grill. Speaker Box D12 is designed for mobile and fixed applications and it is an ideal choice for small clubs and meeting rooms.



HORIZONTAL / VERTICAL POLAR DIAGRAMS

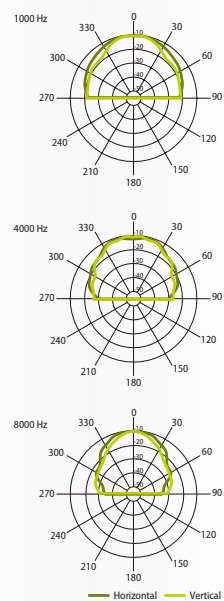

FREQUENCY RESPONSE

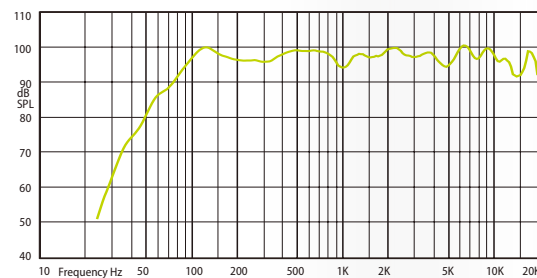

Technical Specifications	SPEAKER BOX D12
Rated power	230 W
Sensitivity	96 dB (1W/1m)
Impedance	8 Ω
Frequency response	50 Hz – 18 KHz
Dispersion	180° (H) x 120° (V)
Driver size	12" (300 mm) woofer, 1,5" (38 mm) tweeter
Connectors	4 pole speakon
Weight	13 kg
Dimensions	615 mm x 400 mm x 320 mm
Material	Housing - plastic, grill - steel
Colour	Black (RAL 9017)



www.amcpro.eu

PA Systems should be heard and not seen.

Simple. Reliable. Profitable.

SOUND PROJECTORS

SP Voice Evacuation Projector EN54-24 Certified



Voice evacuation sound projectors with built-in 100V line transformer, ceramic terminal, thermal fuse, certified according to EN54-24 standard.

SP 10EN


SP 10EN is designed for use in the voice evacuation and paging applications. The clear and intelligible voice announcements will follow installation of these speakers in any application. U-bracket for mounting and position adjustment of the speaker is included in the delivery. The sound projectors are equipped with ceramic terminal and thermal fuse. The speakers are certified according to EN54-24 standard by Intertek.




HORIZONTAL / VERTICAL POLAR DIAGRAMS

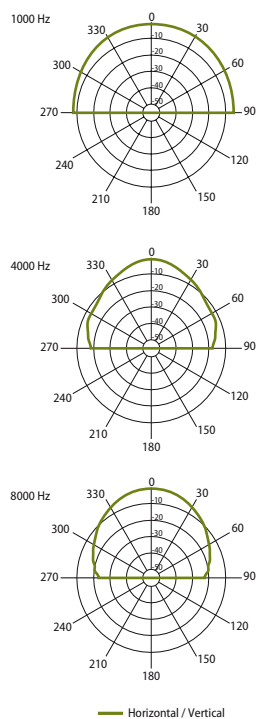

FREQUENCY RESPONSE

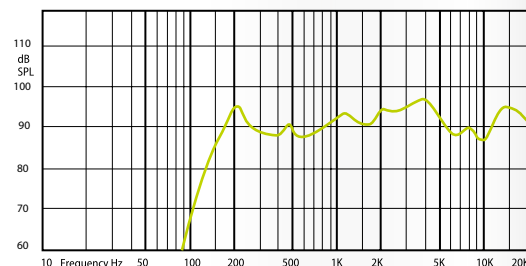

IMPEDANCE

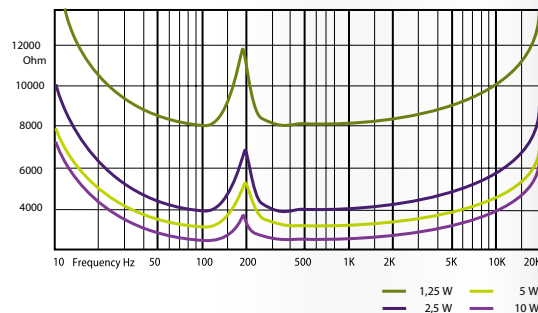

Technical Specifications	SP 10EN
Rated power	10 W
Transformer power taps	10 W - 7,5 W - 5 W - 2,5 W - 1,25 W
Sensitivity	90 dB (1W / 1m)
Maximum SPL	100 dB (Pmax / 1m) at 1 kHz
Frequency response	120 Hz – 18 kHz
Dispersion at 1000	103° (H), 109 (V)
Protection	IP 33
Dimensions	ø 138 mm x 204 mm
Weight	1,3 kg
Material	Plastic housing with aluminium grill, stainless steel U bracket
Colour	White (RAL 9016)

SOUND PROJECTORS

SP Plastic Body Sound Projectors



Advanced design sound projectors with built-in 100V line transformer.

SP 10


SP 10 is a plastic bodied sound projector used to provide high quality sound reproduction for music and speech, IP55 rated for heavy environmental conditions. For use in supermarkets, warehouses, factory buildings, railway stations, car parking areas and pools, wherever clear, high-quality directional sound is required.




HORIZONTAL / VERTICAL POLAR DIAGRAMS

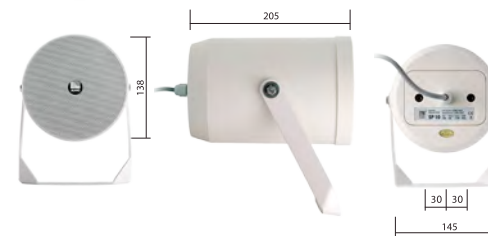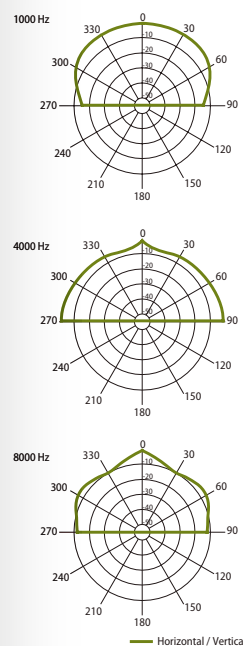

FREQUENCY RESPONSE

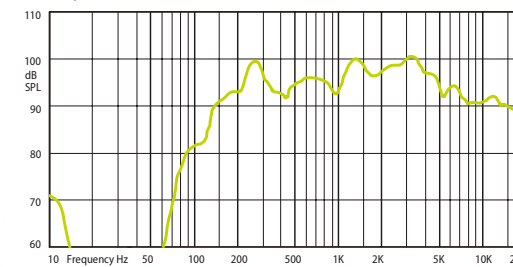

IMPEDANCE

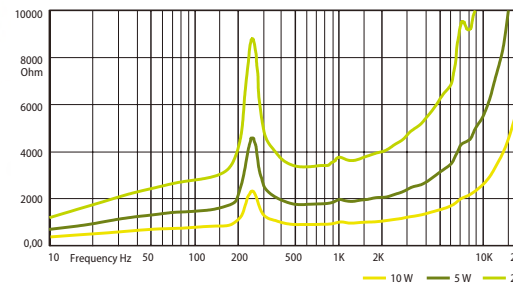

Technical Specifications	SP 10
Rated power	10 W
Transformer power taps	10 W - 5 W - 2,5 W
Sensitivity	91 dB (1W/1 m)
Maximum SPL	101 dB (Pmax/1 m) at 3227 Hz
Frequency response	130 Hz – 15 kHz
Dispersion at 1000 Hz	130° conical
Protection	IP 55
Dimensions	ø 138 mm × 205 mm
Weight	1,6 kg
Material	ABS plastic, stainless U bracket
Colour	White (RAL 9016), black (RAL 9017)

SPM HP High Performance Sound Projectors




SPM HP-aluminium body outdoor sound projectors with integrated 100V line transformer.

SPM 20HP

Featuring a robust and solid aluminium body construction, a built-in full range speaker and a 100V transformer with power taps. IP66 rated for use in heavy weather conditions. This sound projector is the ideal choice for outdoor applications, where background music is priority.



HORIZONTAL / VERTICAL POLAR DIAGRAMS

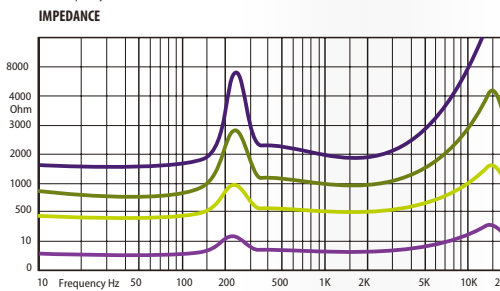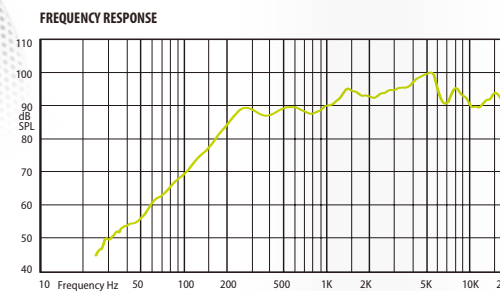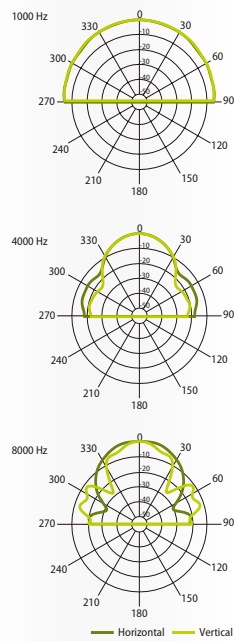

Technical Specifications	SPM 20HP
Rated power	20 W
Transformer power taps	20 W - 10 W - 5 W - 8 Ω
Sensitivity	94 dB (1 W/1 m)
Maximum SPL	109 dB (Pmax/1 m) at 5158 Hz
Frequency response	130 Hz – 20 kHz
Dispersion at 1000 Hz	180° conical
Protection	IP 66
Dimensions	146 mm × 148 mm × 157 mm
Driver dimensions	5" (127 mm)
Weight	3,6 kg
Material	Aluminum
Colour	White (RAL 9016)

SPMB Bidirectional Aluminum Sound Projectors


SPMB bidirectional sound projector with integrated 100V line transformer.

SPMB 10


Aluminium body, 10W power sound projector loudspeaker with ceiling mounting bracket. 130Hz – 15kHz frequency response. Designed for use in music and speech reproduction applications. SPMB 10 has two built-in 5" (127 mm) full range speakers.




FREQUENCY RESPONSE

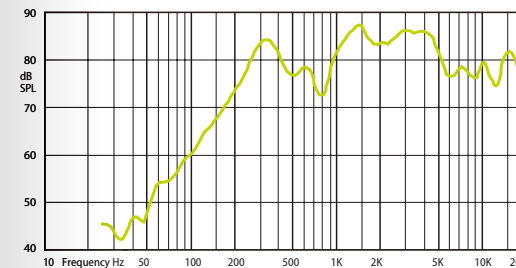


IMPEDANCE

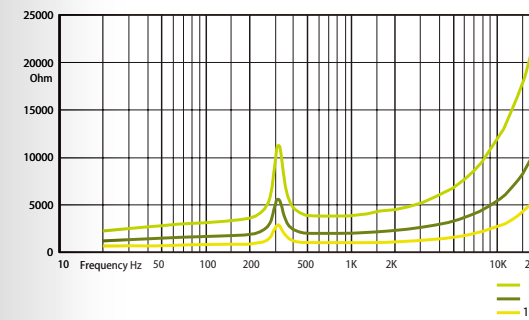

HORIZONTAL / VERTICAL POLAR DIAGRAMS

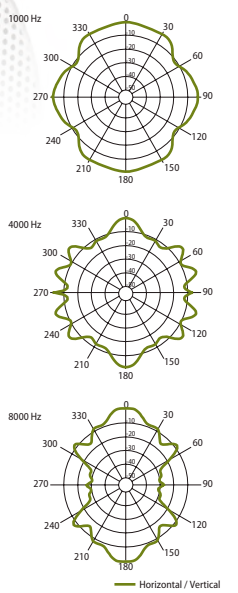

Technical Specifications	SPMB 10
Rated power	10 W
Transformer power taps at 100 V	10 W - 5 W - 3 W
Sensitivity	88 dB (1 W/1 m)
Maximum SPL	101 dB (Pmax/1 m) at 1223 Hz
Frequency response	180 Hz – 18 kHz
Dispersion at 1000 Hz	90° conical
Driver dimensions	5" (127mm)
Protections	IP 55
Dimensions	ø 138 mm x 205 mm
Weight	2,7 Kg
Material	Aluminum
Colour	White (RAL 9018)

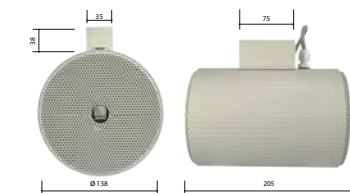

Gateways of the Globe



SOUND PROJECTORS SPM Aluminum Sound Projectors



SPM aluminum body sound projector for outdoor use with integrated 100V line transformer.

SPM 20

Robust and solid aluminium body construction with built-in full range speaker, 100V transformer with power taps, IP55 rated. This sound projector is ideal for use in supermarkets, warehouses, factory buildings, railway stations, car parking areas, petrol stations and pools. Ideal for outdoor use.




HORIZONTAL / VERTICAL POLAR DIAGRAMS

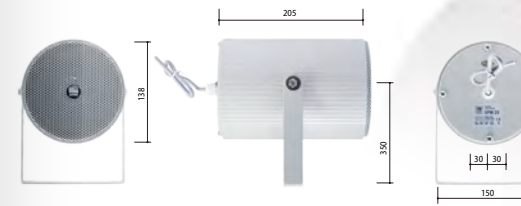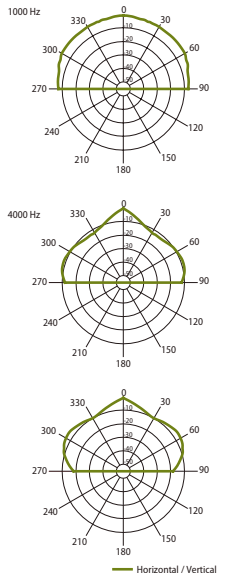


Technical Specifications	SPM 20
Rated power	20 W
Transformer power taps	20 W - 10 W - 5 W
Sensitivity	92 dB (1 W/1 m)
Maximum SPL	105 dB (Pmax/1 m) at 3135 Hz
Frequency response	130 Hz – 15 kHz
Dispersion at 1000 Hz	140° conical
Protection	IP 55
Dimensions	ø 138 mm × 205 mm
Weight	2,2 kg
Material	Aluminum, stainless U bracket
Colour	White papyrus (RAL 9018)

FREQUENCY RESPONSE

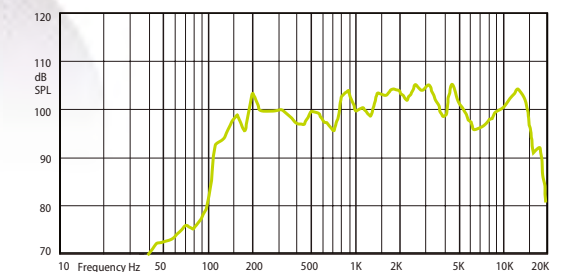

IMPEDANCE

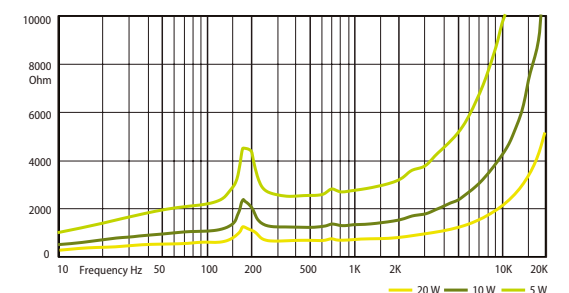

Simple. Reliable. Profitable.

AMC® BALTIC Neries kr. 14A, LT-48397, Kaunas, Lithuania / (370 37) 308585/www.amcpro.eu

SPHERICAL LOUDSPEAKERS


SL Plastic Spherical Loudspeakers

SL modern and stylish spherical loudspeakers with a built-in 100V line transformer.


SL 20M

SL 20M Omni-directional speaker device for applications that require uniform sound distribution. Unique and simple design for modern interiors. Excellent sound dispersion, smooth frequency response and carefully controlled speaker performance for use in difficult acoustic environments. Ideal for rooms with high ceilings.

For additional safety, a wire rope is integrated into the hanging cable.

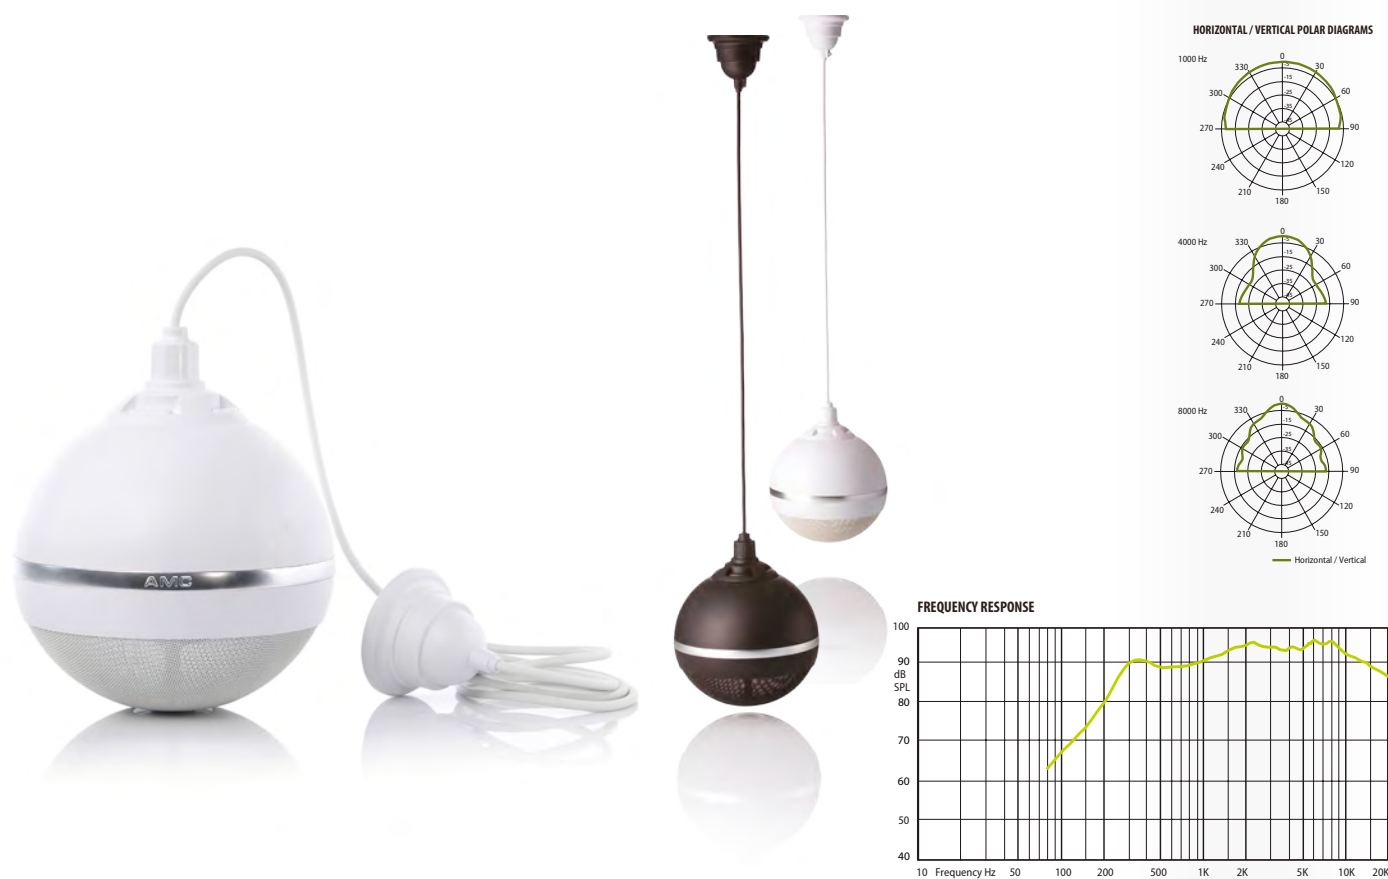

Technical Specifications	SL 20M
Rated power	20 W
Transformer power taps	20 W - 10 W - 5 W
Sensitivity	93 dB (1 W/1 m)
Maximum SPL	112 dB (Pmax/1 m) at 5415 Hz
Frequency response	180 Hz – 20 kHz
Dispersion at 1000 Hz	160° conical
Driver dimensions	6" (158 mm) woofer x 1" (25 mm) tweeter
Dimensions	ø 210 mm x 2000 mm
Weight	1,7 kg
Material	ABS plastic housing, grill - metal
Colour	White (RAL 9016), Black (RAL 9017), Chrome inserts

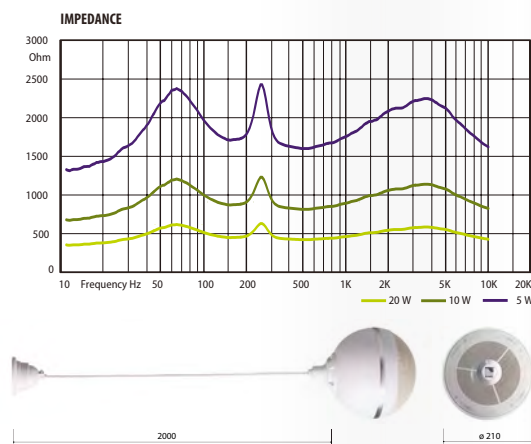


SPHERICAL LOUDSPEAKERS

SL Plastic Spherical Loudspeakers

SL modern and stylish spherical loudspeakers with built-in 100V line transformer.

SL 30

SL 30 – a plastic 30W spherical loudspeaker for background music and speech reproduction in large areas with high ceilings. Coaxial 6.5" (165 mm) speaker with built-in 100 V transformer with power selector and 8 Ω input. Wide frequency response, 160° conical sound dispersion. For additional safety, a wire rope is integrated into the hanging cable. Available in two colours: White (RAL 9016) and Black (RAL 9017)

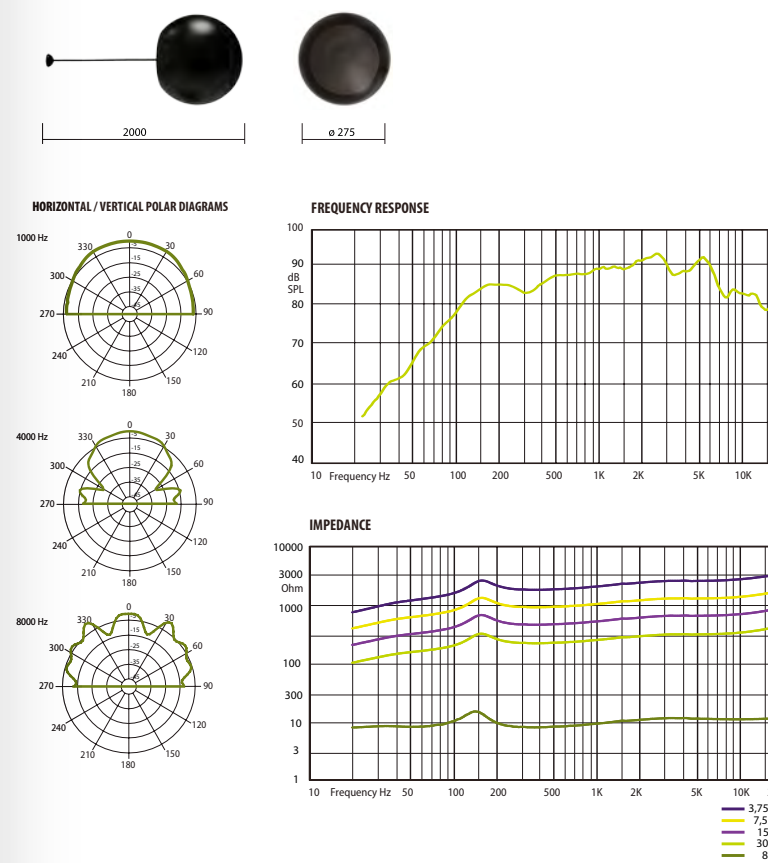

Technical Specifications	SL 30
Rated power	30 W (8 Ω)
Transformer power taps	30 W - 15 W - 7,5 W - 3,75 W
Sensitivity	89 dB (1 W/1 m)
Maximum SPL	108 dB (Pmax/1 m) at 2511 Hz
Frequency response	100 Hz - 20 kHz
Dispersion at 1000 Hz	160° conical
Driver dimensions	6,5" (165 mm) woofer x 1" (24 mm) tweeter
Dimensions	ø 275 mm x 2000 mm
Weight	3 kg
Material	ABS plastic housing, grill - metal
Colour	White (RAL 9016), Black (RAL 9017)



SUBWOOFERS

SUB 100V Passive Subwoofers

Passive subwoofers with built-in 100V line transformer.

SUB 100V



SUB 100V passive subwoofer for 100V loudspeaker systems. Designed for easy mounting on flat surfaces: walls or ceilings.

Built-in high quality 100V transformer with input power selection allows directly connection to 100V loudspeaker lines.


Wooden cabinet with 8" woofer, low pass filter, 100V line power selector and low impedance input. SUB 100V sharply increase low frequency performance in background music systems.




HORIZONTAL / VERTICAL POLAR DIAGRAMS

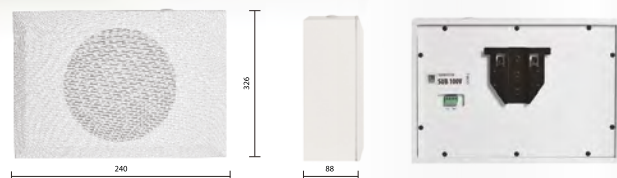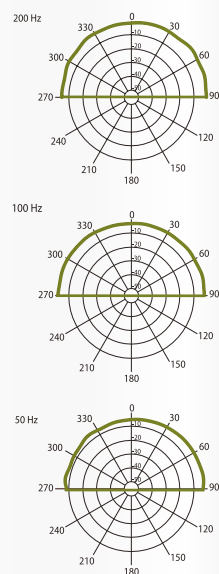

FREQUENCY RESPONSE

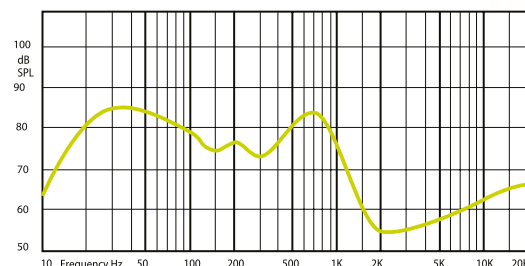

IMPEDANCE

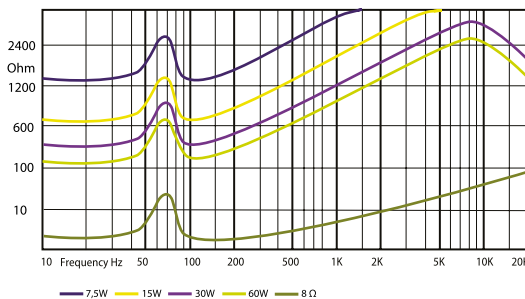

Technical Specifications	SUB 100V
Rated power	60 W
Transformer power taps	60 W - 30 W - 15 W - 7.5 W - 4Ω
Sensitivity	82 dB (1W/1m)
Maximum SPL	100 dB (Pmax/1m at 80 Hz)
Frequency response	40 Hz - 1 kHz
Dispersion at 100 Hz	180° conical
Driver dimensions	8" (205mm)
Dimensions	326 mm x 240 mm x 88 mm
Weight	4,9 kg
Mounting	Steel bracket for mounting on the wall or ceilings
Colour	White(RAL9016)

SUBWOOFERS

SUB Powered Subwoofers

SUB powered subwoofers for extra low frequency sound reproduction.



SUB 2

200W active subwoofer with front mounted high quality 10" glass aramid composite woofer.

Strong bass output with 90 dB sensitivity. Small size and strong bass output will complement any installation where extra low frequencies are required.




HORIZONTAL / VERTICAL POLAR DIAGRAMS

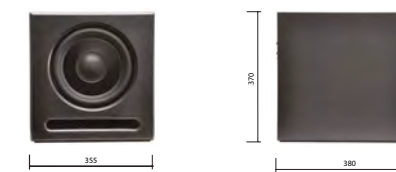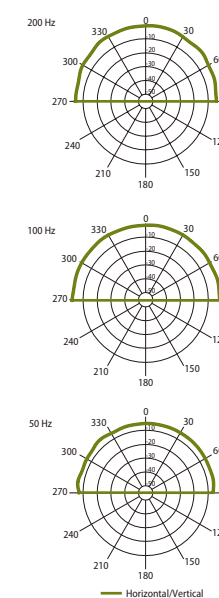

Technical Specifications	SUB 2
Rated power	200 W
Frequency response	20 Hz - 130 Hz
Low pass filter	50 Hz - 130 Hz
Maximum SPL	120 dB
Dispersion at 100 Hz	180° conical
Driver dimensions	10" (254mm) woofer
Input gain control	- 6 dBu - +3 dBu
Inputs	Stereo RCA, balanced stereo 6,3 mm TRS JACK, balanced stereo XLR
Dimensions	355 mm x 380 mm x 370 mm
Weight	12 kg
Material	Painted MDF
Colour	Black (RAL 9017)

FREQUENCY RESPONSE

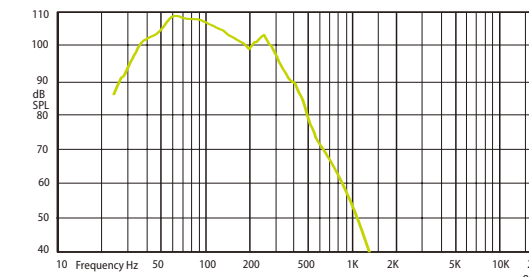

VOLUME CONTROLS


VC Flush Mount Volume Controls

VC volume controls designed for European style flush-mount boxes.


VC 5R, VC 30R & VC 60R

VC volume controls are designed for use in background music and voice evacuation systems, where local sound level control is required. Equipped with 10-step attenuation. Built-in 24V internal emergency relay with internal switch, so volume controls can be used in passive or active mode. Available for 5W, 30W and 60W power speaker line control.


VC 30R & 60R

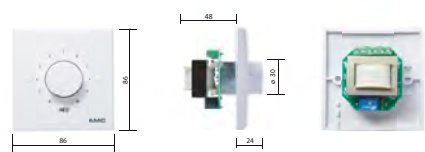

VC 5R

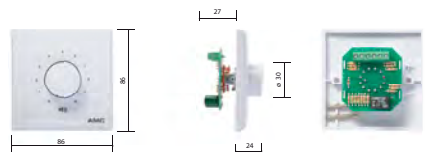

Technical Specifications	VC 5R	VC 30R	VC 60R
Input	5 W	30 W	60 W
Steps	10 + OFF		
Dimensions	86 mm x 86 mm		
Material	Plastic		
Switch modality	DC 24 V/6 Wire		
Modality	Resistor	Transformer	
Weight	0,08 kg	0,16 kg	0,18 kg
Emergency relay	DC 24 V		

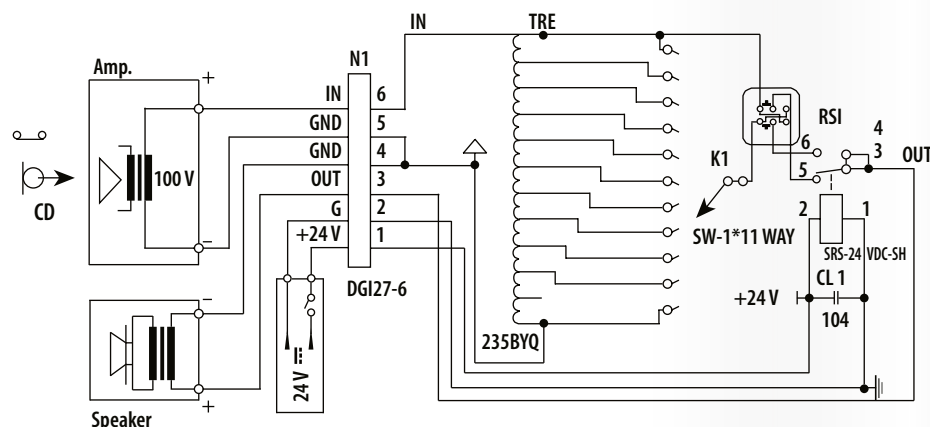

Active mode: Volume control will be fully opened and set to the maximum level until 24V DC is supplied. After DC powering, volume control will come in to operation.
 Passive mode: Volume control will be active before 24V DC will not be supplied. When DC is powered, Volume control will not be active and volume will be set to maximum level.


SPEAKER CABLE & CONNECTORS

Flame-retardant and oxygen free speaker cable

OFCFR are double-shielded oxygen-free speaker cables with flame retardant PVC insulator.

OFCFR 2x0.82 & OFCFR 2x1.5

Cables for voice evacuation and public address systems, available in two colours: Orange & Grey.

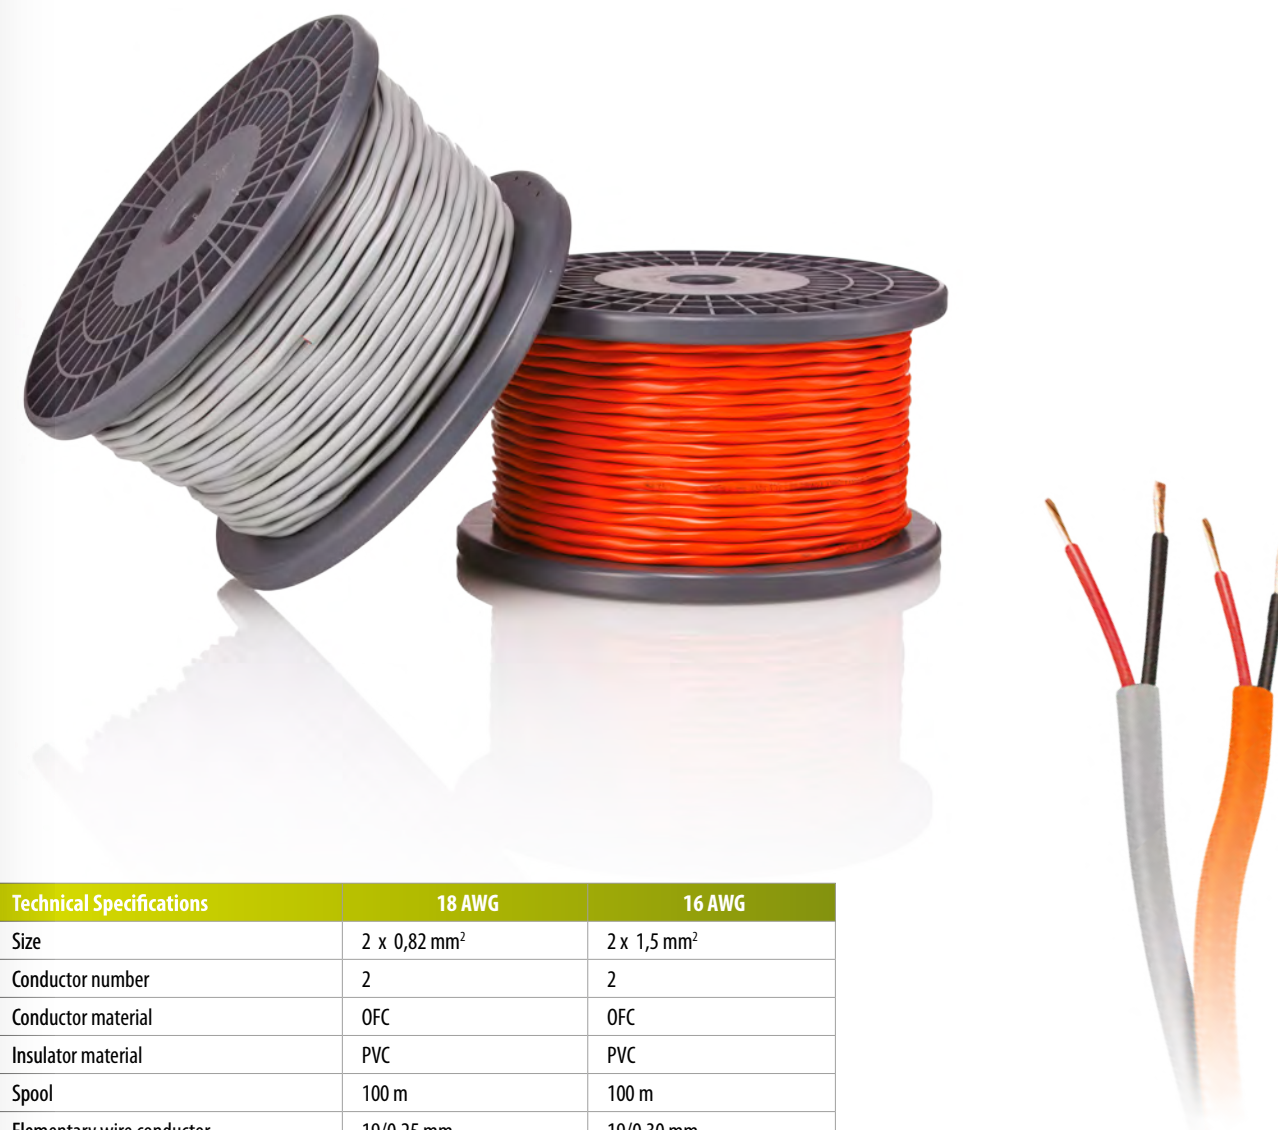

Technical Specifications	18 AWG	16 AWG
Size	2 x 0,82 mm ²	2 x 1,5 mm ²
Conductor number	2	2
Conductor material	OFC	OFC
Insulator material	PVC	PVC
Spool	100 m	100 m
Elementary wire conductor	19/0,25 mm	19/0,30 mm
Conductor resistance at 20° C	0,0187 Ω/m	0,0134 Ω/m
Capacitance	68,3 pF/m	95 pF/m
Colour	Orange or grey	Orange or grey



ACCESSORIES

TCB Table Connection Box

Anodized aluminum cable box.

TCB 2

Table top mount box for AV cable installation in conference, board rooms or auditoriums. The TCB 2 box has several cable openings for AV cable runs and 2 power plugs. Cables are easy accessible and hidden if not in use.



Technical Specifications	TCB 2
AC power socket	2 x 16 A, Euro shuko ~250 V, 3 pole
Power entry connector	ICE C 14 fused socket, 10 A ~250 V
Pass through cable slot	2 x Ø 12,5 mm, 3 x Ø 9 mm, 1 x Ø 6,5 mm
Installation requirement	Table cut out
Mounting accessories	2 x special screws
Dimensions	200 mm x 170 mm x 130 mm
Weight	2 kg
Material	Steel with anodized aluminum top
Colour	Black (RAL 9017)

SPEAKER CABLES & CONNECTORS

Accessories

Balanced audio cables, connectors and ceramic terminal blocks.

AUDIO CABLES & CONNECTORS

High quality screened audio cables and cable assemblies. Neutrik connectors and Taskers cables.



MK XLR Assembled Audio Cable

Balanced audio cable with NC3MX and NC3FX Neutrik connectors.

MK XLR/KL Assembled Audio Cable

Balanced audio cable with NC3MX and NP3C Neutrik connectors.

Product Name	MK XLR/KL	MK XLR
Type of cable	Shielded audio cable	Shielded audio cable
Connectors	Neutrik NC3MX & NP3C	Neutrik NC3MX & NC3FX
Cable specification	Tasker TSK1033	Tasker C112
Length	1.5m, 3m and 5m	1.5m, 3m and 5m
Weight	100g, 180g and 230g	150g, 230g and 350g
Colour	Blue	Blue

Product Name	XLR Connectors
Models	NC3MX, NC3FX
Gender	Male, Female
PIN number	3
Max wire size	2,5 mm ²
Wiring	Solder contacts
Weight	31g, 37g

Ceramic Terminal Blocks

High temperature resistant ceramic terminal blocks

Product Name	Ceramic Terminal Blocks
No. of poles	3
Max. voltage	600V
Max. current	24A
Max. wire size	2 x 1.5 mm ² or 1 x 2.5 mm ²
Dimensions	34 mm x 18 mm x 16 mm
Weight	22g



XLR Connectors

Cable connectors.



Mounting Brackets, Boxes & Transformers

Mounting brackets, 100V line transformers & single gang boxes for VC volume controls

MOUNTING HARDWARE

WB-H Wall Mount Bracket for Horn Loudspeakers

WB-H mounting bracket for horn loudspeaker ▶

Product Name	Wall mount bracket for horn speaker
Model	WB-H
Dimensions	160 mm x 200 mm x 280 mm
Mounting hole diameter	Ø10 mm
Material	Steel
Weight	1,8 kg
Colour	White (RAL 9016)



MB63 & MB65 Cluster Assemblies

MB63 & MB65 - mounting assemblies for 6 pieces

VIVA3 302 & VIVA3 502 speakers hung from ceilings



Product Name	Cluster Assembly	Cluster Assembly
Model	MB63 VIVA3 302 Cluster Mount	MB65 VIVA3 502 Cluster Mount
Dimensions	Ø365 mm x 110 mm	Ø485 mm x 117 mm
Mounting hole diameter	Ø10 mm	Ø10 mm
Material	Steel	Steel
Weight	2,5 kg	3,10 kg
Colour	White (RAL 9016)	White (RAL 9016)

mBox Metal Box for VC Volume Control

mBox metal surface mount box for VC volume controls



Product Name	mBox
Material	Steel
External Dimensions	86 mm x 56 mm x 85 mm
Internal Dimensions	83 mm x 53 mm x 82 mm
Weight	230 g
Colour	White (RAL 9016)
Mounting type	Surface mount



iBox Single Gang Box for VC Volume Control

iBox single gang box for VC volume control flush mount ▶

Product Name	iBox
Material	Plastic
External Dimensions	80 mm x 78 mm x 52 mm
Internal Dimensions	68 mm x 70 mm x 50 mm
Weight	60 g
Colour	Black (RAL9017)
Mounting type	Flush mount




100 V Line Transformers

Transformers for 100 V speaker lines with secondary winding for 8Ω speakers.

Speaker line maximum load - 10W, 20W, 30W, 50W ▼

Technical Specifications	TR-10	TR-20	TR-30	TR-50
Power	10W	20W	30W	50W
Transformer power taps	10 W - 5 W - 2,5 W - 1,25 W	20 W - 10 W - 5 W - 2,5 W	30W	50W
Load for secondary winding	8Ω	8Ω	8Ω	8Ω
Weight	0,3 kg	0,3 kg	0,3 kg	0,6 kg
Dimensions	50 mm x 43 mm x 40 mm	50 mm x 43 mm x 43 mm	50 mm x 43 mm x 41 mm	60 mm x 50 mm x 52 mm
Cable length	200 m	200 mm	190 mm	200 mm

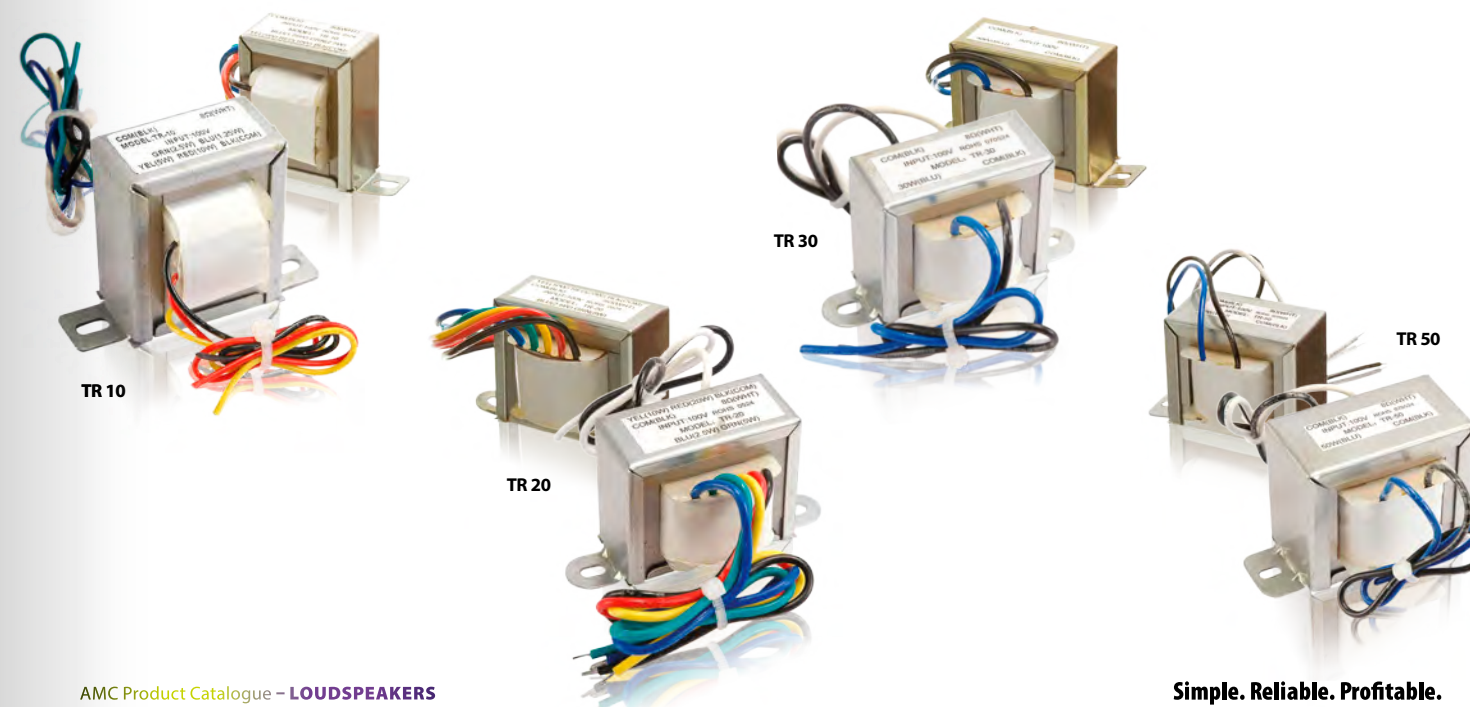

Simple. Reliable. Profitable.