

RF B55 Installation manual

① Extension plate:

STEP 1: Rotate upper cabinet upside down, so that the AMC logo is at the top. Rotate the logo direction.


STEP 2: Remove all the M8 locating inserts (A,B,C&D) from the both upper and lower cabinet as shown

STEP 3: Align the extension plate with the screw holes on the upper cabinet (point A&B) and use the included M8x25 machine screws to fix it to cabinet

STEP 4: Insert another M8x25 machine screw through the curved slots on the extension plate into the screw hole (point D) but do not tighten it

STEP 5: Determine the angle between the two cabinets, (0 , 10 and 20 on choice), adjust the lower cabinet until the point C lines up with the hole marked with the angle you choosed. Then fix it with a M8x25 screw

STEP 6: Tighten the screw on point D

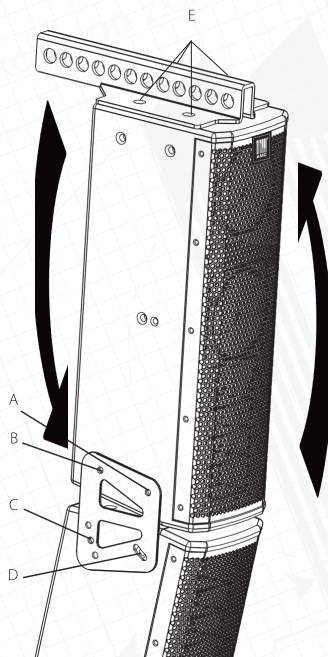

② Flying frame:

STEP 1: Remove four M8 locating inserts (E) from the top of the upper cabinet

STEP 2: Align the frame plate with the screw holes on the cabinet and use the included M8 machine screws to fix it

NOTE: when using only one cabinet with flying frame, there is no need to hang it upside down. Hang the cabinet in normal position with AMC logo at the bottom.



Please pay attention: Mount loudspeaker on the reliable base only.