


CEILING LOUDSPEAKERS

EVAC Voice Evacuation Ceiling Loudspeakers


Metal ceiling loudspeakers with built-in 100V transformer. Steel grill and fire dome. Designed for easy mounting in to false ceilings

EVAC 50X


Designed to be installed in false ceilings or panels. EVAC 50X is perfect for use in a voice alarm role, for clear and intelligible speech reproduction as well as background music. In compliance with EN 54-24 standard, EVAC 50X is equipped with ceramic terminal and thermal fuse.

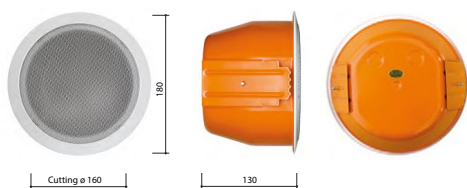


HORIZONTAL / VERTICAL POLAR DIAGRAMS

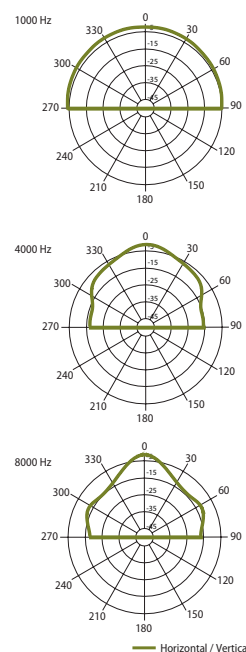

FREQUENCY RESPONSE

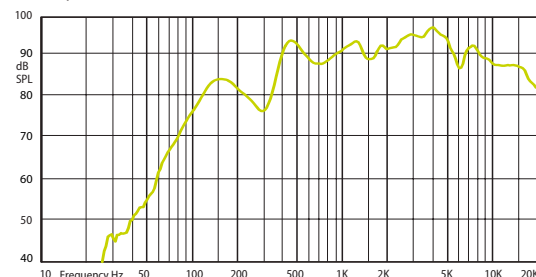

IMPEDANCE

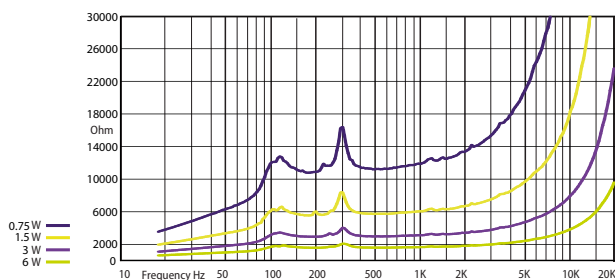

Technical Specifications		EVAC 50X
Rated power		6 W
Transformer power taps		6 W - 3 W - 1,5 W - 0,75 W - 0,25 W
Sensitivity		92 dB (1 W/1 m)
Maximum SPL		104 dB (Pmax/1 m) at 3651 Hz
Frequency response		150 Hz – 18 kHz
Dispersion at 1000 Hz		180° conical
Driver dimensions		5" (127 mm)
Dimensions		ø 180 mm x 130 mm
Weight		1,32 kg
Material		Steel
Colour		Speaker - white (RAL 9016), fire dome - orange (RAL 2008)