

HORN LOUDSPEAKERS

HQ Voice Evacuation Plastic Horn Loudspeakers

EN54-24 certified


HQ 15EN robust high SPL outdoor horn loudspeaker certified according to EN54-24 standard

HQ 15EN


HQ 15EN improved quality plastic horn speakers with extremely high SPL and a powerful middle range frequency response. Well suited for indoor and outdoor installation. For voice evacuation and paging systems. With U-mounting bracket. Conforms EN54-24 standard.




HORIZONTAL / VERTICAL POLAR DIAGRAMS

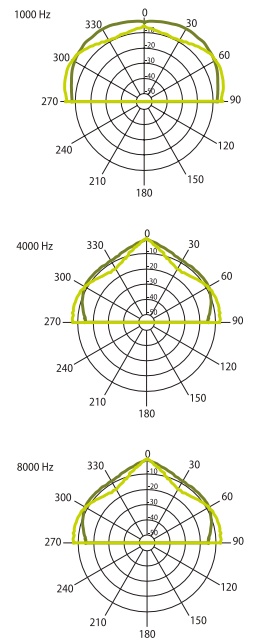

FREQUENCY RESPONSE

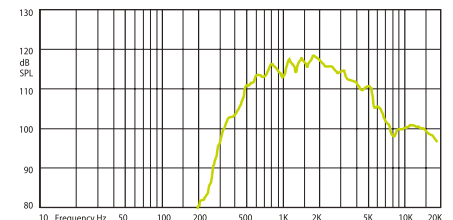

IMPEDANCE

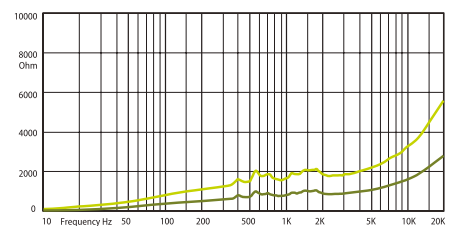

15 W 7,5 W



Technical Specifications	HQ 15EN
Rated power	15 W
Transformer power taps	15 W - 7,5 W
Sensitivity	105 dB (1W/1m)
Maximum SPL	100 dB (Pmax/4 m)
Frequency response	380 Hz - 10 kHz
Dispersion at 1000 Hz	150° (H), 135° (V)
Protection	IP 66
Dimensions	222 mm x 162 mm x 232 mm
Weight	1,4 kg
Material	ABS plastic, U type steel bracket
Colour	White (RAL 9016)