



## DATA SHEET

---

### USB-C<sup>®</sup> Male to USB-A Female Adapter Converter – USB 3.2 Gen 1 (5Gbps)

Adapt a USB-A device to a USB-C port on a laptop, desktop computer, tablet, or other device

#### OVERVIEW

The USB-C Male to USB-A Female Adapter Converter - USB 3.2 Gen 1 (5Gbps) is the perfect solution for connecting a flash drive, keyboard, mouse, or other device that has a USB-A connector to a laptop or desktop computer that has a USB-C port for USB 3.2 Gen 1 communication. The USB-C connector is smaller than traditional USB connectors and features a symmetrical design which allows it to be easily connected on the first try. Additionally, the durability of the USB-C connector allows for up to 10,000 connection cycles. This cable supports a data transfer rate up to 5Gbps.

With a transfer rate of up to 5Gbps, it is fully backward compatible with USB 3.0, 2.0, and 1.1 devices. The dongle-style extender reduces strain on the USB-C port, preventing extra weight and strain from damaging the port. No need to worry about software or drivers to install, the plug-and-play feature makes it simple to just connect and start using right away.

#### FEATURES

- Adapt a USB-A device, like a flash drive, keyboard, mouse, or other device to a USB-C port
- Designed to support USB 3.2 Gen 1 (5Gbps) communication and features
- Backwards compatible with USB 3.0, 2.0, and 1.1 devices
- Dongle-style adapter, which reduces strain on the connected USB-C port
- Plug and Play—no software or driver required

#### ITEM DESCRIPTION

C2G29515	USB-C Male to USB-A Female Adapter Converter – USB 3.2 Gen 1 (5Gbps)
----------	--

## SIGNAL SPECIFICATIONS

- Supports USB 3.2 Gen 1 SuperSpeed (5Gbps) transmission

## ELECTRICAL SPECIFICATIONS


- Rating: Temp 80[D]C; Voltage 30V
- Conductor Resistance: At 20°C Max 34AWG: 588.5 OHMS/KM
- Insulation Resistance: 10M-KM Min at 20°C DC 500V (EIA-364-21)
- Dielectric Strength: AC 500V/1 Minute No Breakdown (EIA-364-20)

## PHYSICAL SPECIFICATIONS

- Operating Temperature: 0°C to +50°C
- Operating Humidity: 15% to 85% RH (No Condensation)
- Storage Temperature: -25°C to +70°C
- Storage Humidity: 15% to 85% RH (No Condensation)

## PHYSICAL CHARACTERISTICS

- USB-C Male: Contacts Terminal Gold Flash, Gold Plated Shell; Black Insulation
- USB-A Female: Contacts Terminal Gold Flash, Gold Plated Shell; Blue Insulation
- USB-C Male Molding Material: Black PVC Conforms ROHS
- USB-A Female Molding Material: Black ABS Conforms ROHS
- Cable OD: 4.5mm
- Product is CE Marked and Conforms to 2011/65/EU ROHS 2

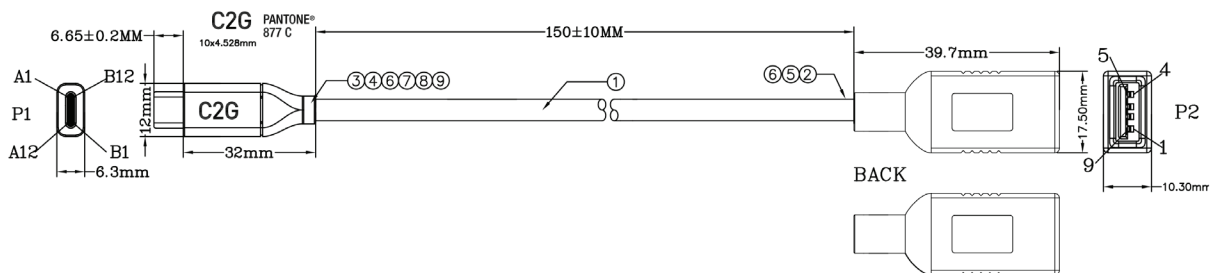

LEGRAND | AV COMMERCIAL BRANDS  
C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold

SIMPLIFIED CONNECTIVITY | [c2g.com](http://c2g.com) | [legrandav.com](http://legrandav.com)

USA P 800.CABL.911 E [trg@c2g.com](mailto:trg@c2g.com)