


SPECIFICATION SHEET

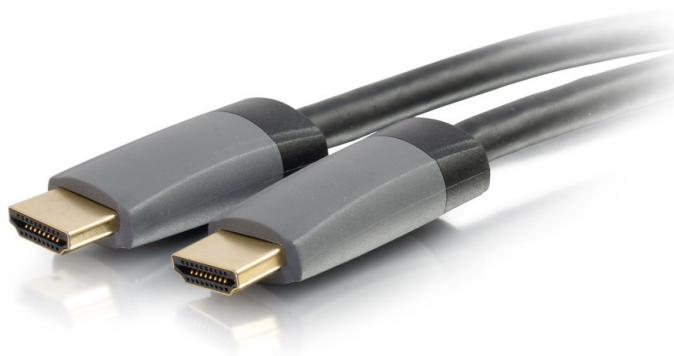

Select HDMI Cable

- CMG Jacket rated for in-wall applications
- Fully shielded to prevent EMI/RFI interference
- Supports HDMI with Ethernet

Specifications: C2G Select HDMI Cable

Electrical Characteristics:

Signal Bandwidth:	10.2Gbps	
Nominal Impedance with Tolerance:	100Ω	
Nominal Capacitance:	95.2 pF/m	
Dielectric Strength:	2.1	
Insulation Resistance:	10MΩ	
Nominal Attenuation:	300 KHz	825 MHz: < 8dB
	825 MHz	2.475 GHz: < 21dB
	2.457 GHz	4.125 GHz < 30 dB

Physical Characteristics:

Cable Bend Radius:	100mm
Approvals:	CMG, CE
Warranty:	Lifetime
Package Type:	Polybag

Conductor 1:

Conductor Type:	23AWG (1/0.573) Bare Copper
Insulation:	Foamed PE, ID: $\varnothing 1.55 \pm 0.05$ mm Red/White, 5 pairs
Drain Wire:	28AWG (7/0.127) Bare Copper
Shield:	Aluminum Foil + Mylar 25% min overlapped

Conductor 3:

Conductor Type:	28AWG (7/0.8) Bare Copper
Insulation:	Foamed PE, ID: $\varnothing 1.57 \pm 0.05$ mm Red/Purple/Grey PE Thickness 0.2mm

Conductor 2:

Conductor Type:	28AWG (7/0.127) Bare Copper
Insulation:	HDPE, ID: $\varnothing 0.7 \pm 0.05$ mm Yellow


Connectors (2):

Connector Type:	19 pin HDMI
Plating:	Gold
Housing:	Grey & Black
Dimensions (HxWxL):	13 x 21 x 39mm

Overall Cable Construction:

Drain Wire:	28AWG (07/0.127) Bare Copper
Foil Shield:	Aluminum Foil + Mylar 25% min overlapped
Braided Shield:	24/6/0.12 CCAM 60% Coverage
Jacket	CMG (PVC, UL/CL2) Black O.D. - 10.0 ± 0.2 mm

Specifications: C2G Select HDMI Cable

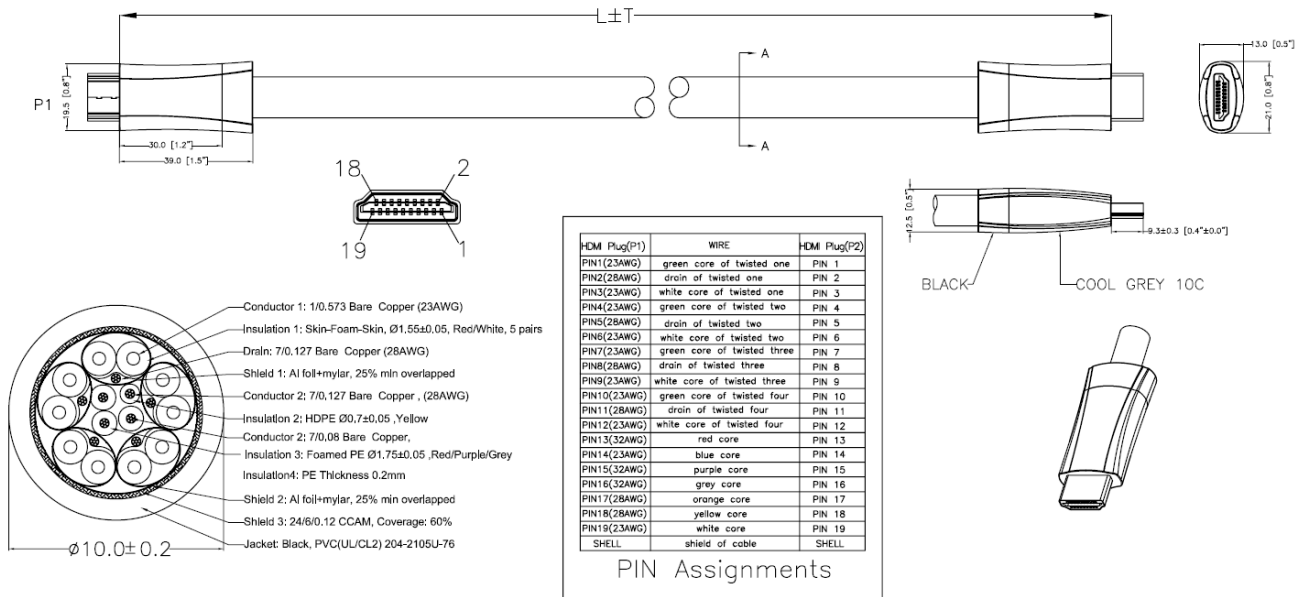

Part Number	Description	Weight (lbs)
42526	10m Select Standard Speed HDMI Cable with Ethernet	2.464
42527	15m Select Standard Speed HDMI Cable with Ethernet	3.828
50634	35ft Select Standard Speed HDMI Cable with Ethernet	2.721
50635	40ft Select Standard Speed HDMI Cable with Ethernet	3.189
50636	50ft Select Standard Speed HDMI Cable with Ethernet	4.150



Cables To Go
3555 Kettering Blvd.
Moraine, OH 45439
Phone: 800.287.2843
www.c2g.com

Follow Us

