




MAJOR PRO-C TENSIONED

MAJOR PRO-C TENSIONED is high end professional screen range whose measures go from 450 cm. up to 650 cm. of width.

These motorized screens are equipped with a special tensioning system that gives a perfect flatness to the cloth.

Major Pro-C Tensioned are very reliable products, supplied with a white aluminium cabinet suitable to fit various aesthetic applications.

Available in 4:3, 16:9, 16:10 formats and on size.



CEILING MOUNTING



HOUSING LOWER GLANCE

- Strong steel and aluminium mechanism
- Aluminium housing with multiple fixing points, using sliding brackets for a variety of installation options
- Housing painted with white epoxy powders (RAL 9010)
- Mounting brackets for ceiling
- Flame retardant projection surfaces – classification M1 and B1
- Side black borders of 5 cm. (in the narrowest point), black bottom border of 10 cm. and black dowel bar: height 35 mm. - depth 20 mm.
- On 16:9 and on 16:10 ratio a black drop of 30 cm. is included
- Tensioning system on both sides
- **Optional:** Wall mounting brackets available upon request
- **Optional:** Screen housing available in different colours

* Major Pro-C Tensioned 450 of width is supplied with three ceiling mounting brackets.

* Major Pro-C Tensioned 550 of width is supplied with three ceiling mounting brackets.

* Major Pro-C Tensioned 650 of width is supplied with four ceiling mounting brackets.


TECHNICAL DETAILS

| 4:3 Ratio Viewing area (WxH) | 16:9 Ratio Viewing area (WxH) | 16:10 Ratio Viewing area (WxH) | Overall dimensions | | Front projection surfaces | Rear projection surfaces | Approx. net weight |
|---|---|---|-------------------------------|-------------------------------|---|--|------------------------------|
| | | | (E) | (C) | | | |
| cm. 450x337 cm. 550x412 cm. 650x487 | cm. 450x253 cm. 550x309 cm. 650x366 | cm. 450x281 cm. 550x344 cm. 650x406 | cm. 520 cm. 620 cm. 720 | cm. 505 cm. 605 cm. 705 | White gain 1.2 Matte White gain 1.2 Microholes gain 1.0 | Rear plus gain 0.1 Front Rear gain 0.9 (no black borders) | Kg. 89 Kg. 106 Kg. 124 |

Warranty: 5 years on the motor - 24 months on the other components


TECHNICAL SPECIFICATIONS

1:15

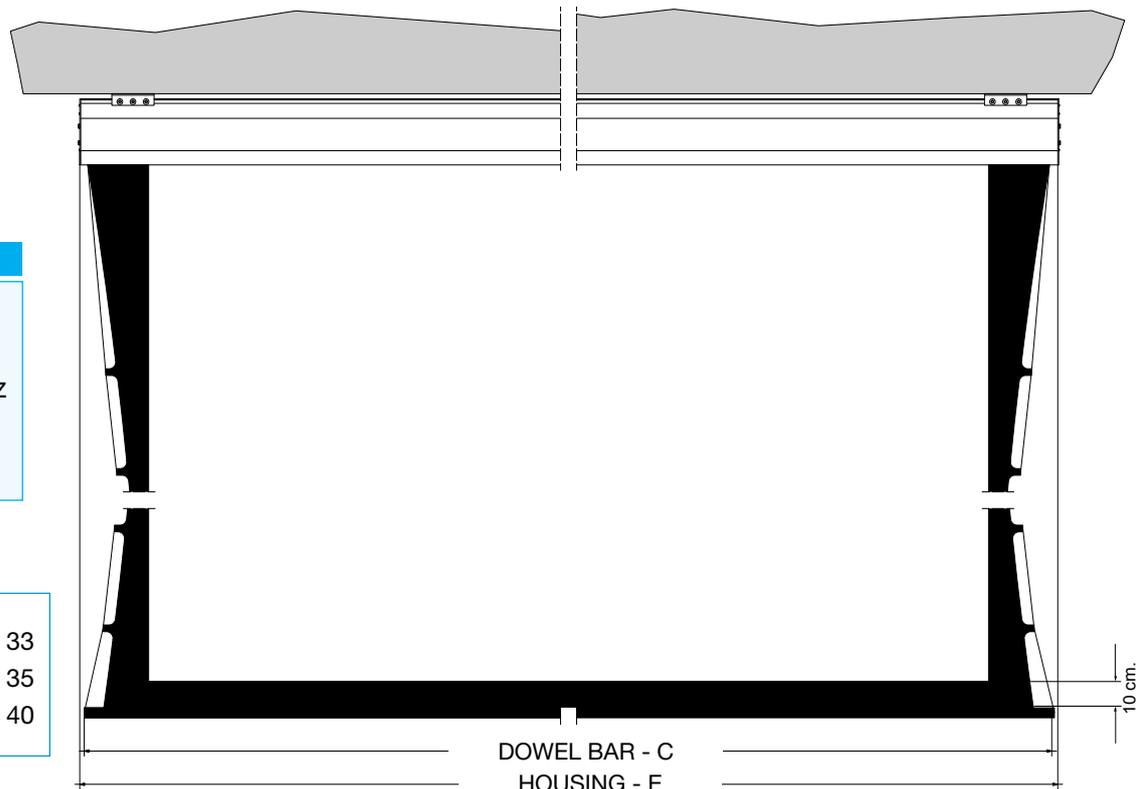

Motor characteristics

- Power: 40 Nm
- Speed: 17 rpm
- Power supply: 230V / 50 Hz
- Consumption: 322 W
- Certification: IMQ



sec.

H cm. 375 sec. 33
H cm. 450 sec. 35
H cm. 525 sec. 40

Average time of rolling up/down


OPTIONALS




Wall mounting brackets



Truss mounting brackets

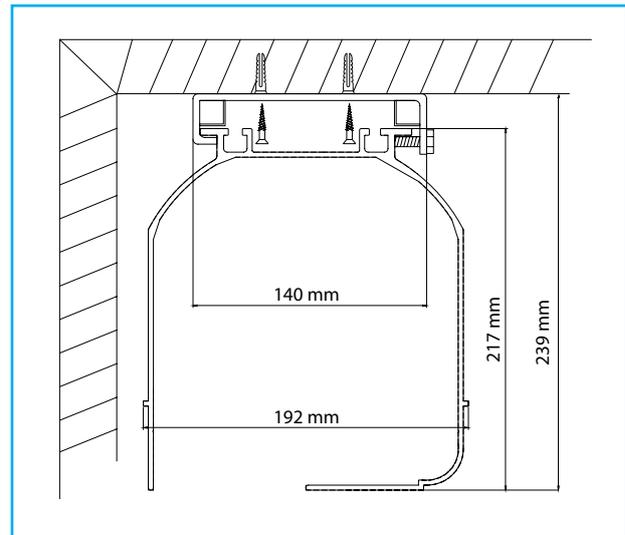

Ceiling mounting

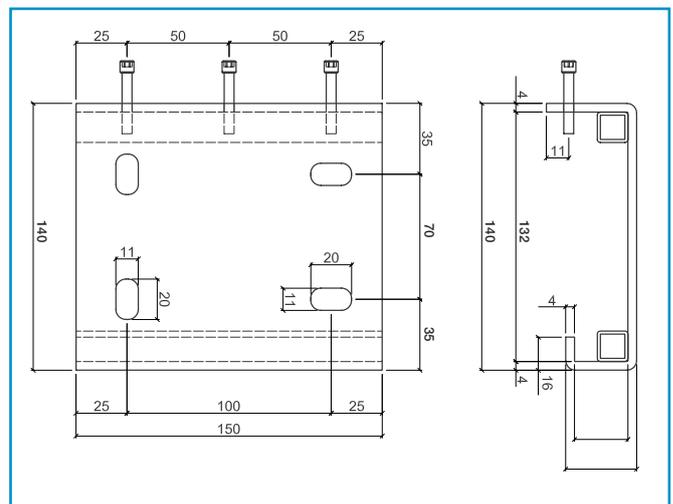

Technical drawing of the ceiling mounting bracket

* Measures in the technical drawing are expressed in millimetres.

Euroscreen S.r.l.
Via Stiria, 45/16 - 33100 Udine - Italy
Tel. +39 0432 522755
Fax +39 0432 524000
www.screenint.com
info@screenint.com

