

Specifications

SMART electric height-adjustable wall stand

Model WSE-400

Overview


Designed for the current line of SMART Board® interactive displays, the SMART electric height-adjustable wall stand features 39 3/8" (99 cm) of powered height adjustment with a safety bounce-back feature that reverses direction briefly if an obstruction is detected. With its sturdy steel frame, the stand supports displays up to 86" (218 cm) diagonal and 212 lb. (96 kg) total weight including accessories. The stand has a TUV-certified drive system and complies with Americans with Disabilities Act (ADA) standards. The stand also includes VESA mounting points for easy installation of the display and peripherals.

See smarttech.com for more information on this product.



Dimensions and weights¹

Dimensions

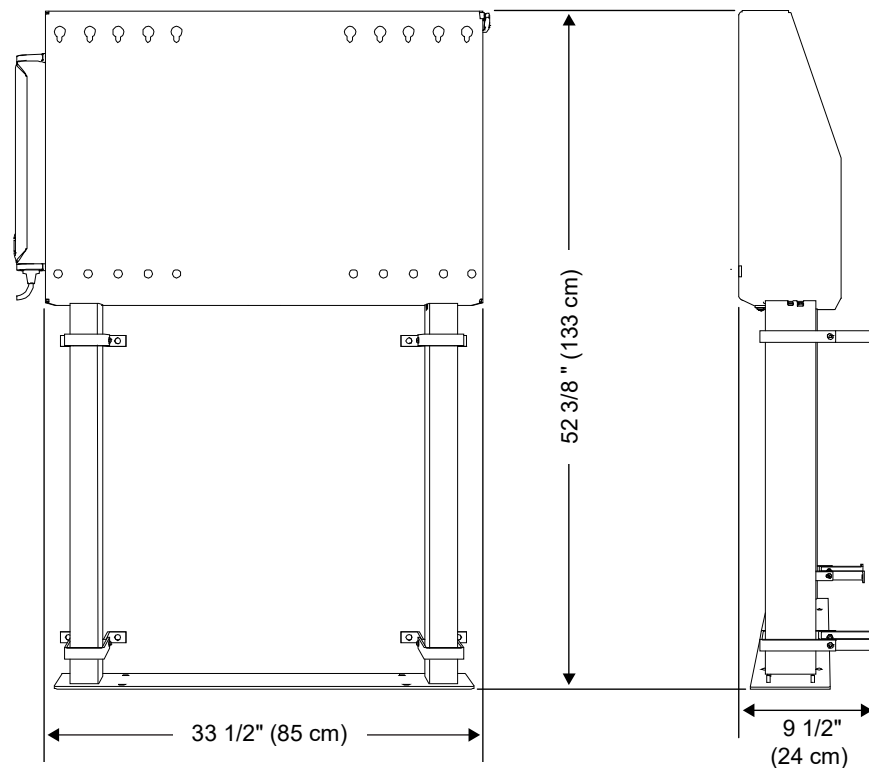

Weight

90 lb. (41 kg)

Shipping dimensions

31 1/8" × 20 3/4" × 7 1/2"
(79 cm × 53 cm × 19 cm)

Shipping weight

96 lb. (43.5 kg)

Storage cabinet dimensions

29 1/2" × 19 5/8" × 7"
(75 cm × 50 cm × 17.8 cm)

¹All dimensions ± 1/8" (0.3 cm). All weights ± 2 lb. (0.9 kg).

Hardware

Supported SMART Board displays	SMART Board 7000 series, 6000 series, MX and MX100 series displays
Maximum display size	Supports displays up to 86" (218 cm) diagonal and 80" (203 cm) wide

Height adjustment

Range	39 3/8" (99 cm)
Maximum extended height	86 5/8" (220 cm)
Minimum extended height	47 5/8" (121 cm)
Maximum lift capacity	212 lb. (96 kg)

Components

Mounting	VESA® mounting pattern: 300 mm × 400 mm - M8, 500 mm × 400 mm - M6, 600 mm × 400 mm - M8, 700 mm × 400 mm - M8, 400 mm × 200 mm - M8, 800 mm × 200 mm - M8 with adapter (not included)
----------	--

Storage and operating requirements

Power consumption

Supply voltage	100V–240V AC, 50 –60 Hz
Nominal voltage	110V AC, 220V AC

Power consumption

Raising a display (maximum load)	300 W
Standby mode	0.1 W
Duty cycle	10% (2 minutes of operation fully loaded, 18 minutes of rest)

Operating temperature	50–104°F (10–40°C)
------------------------------	--------------------

Storage temperature	14–158°F (-10–70°C)
----------------------------	---------------------

Humidity	85% non condensing
-----------------	--------------------

Certification and compliance

Regulatory certification	ISED, CE
Other	ADA

Environmental compliance

European Union	RoHS, REACH and Packaging Directive
U.S.	CONEG Packaging, California proposition 65

Purchasing information**Order numbers**

WSE-400	SMART electric height-adjustable wall stand
FSE-400-LS	Laptop shelf

Optional accessoriesSee [smarttech.com/accessories](https://www.smarttech.com/accessories)**Warranty**

Five-year limited equipment warranty

[smarttech.com/support](https://www.smarttech.com/support)
[smarttech.com/contactsupport](https://www.smarttech.com/contactsupport)

© 2020 SMART Technologies ULC. All rights reserved. SMART Board, smarttech, the SMART logo and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. All third-party product and company names may be trademarks of their respective owners. This product and/or use thereof is covered by one or more of the following U.S. patents: www.smarttech.com/patents. Contents are subject to change without notice. October 2, 2020.