televic

Confidea F-DD

Confidea Flushmount Delegate Discussion Unit



Description

The Confidea F-DD is Televic's delegate panel for basic discussion systems, equipped with an integrated speaker. Its small form factor, housed in an elegant casing, permits a minimalistic integration into any meeting room furniture. The integrated speaker creates a distributed sound field in the meeting room, increasing intelligibility without the need for an additional room sound system. The panel has a screw-lock connector to fit a removable microphone (available in 30, 40 or 50 cm versions). A 3.5 mm jack socket is available to connect headphones or a hearing loop for the hearing impaired. The chairman version of this panel has additional controls (see Confidea F-CD 71.98.0511).

Benefits

The Confidea F-DM is a sleek and discreet solution that is perfectly suited to conference rooms without an existing sound system. The ability to connect headphones provides accessibility for the hearing impaired. The unit is available in a variety of custom colors, sizes and finishes to blend in neatly in any environment. The Confidea F-DD is backed by the Plixus® network and redundant cabling to ensure maximum reliability. Finally, its shielded microphone is immune to mobile phone interference.

Features

- Basic discussion function
- Tactile microphone push button with integrated LED
- Integrated loudspeaker
- Rounded corners for easy installation
- Trademark natural Televic Sound
- Available in custom colors, sizes, finishes Basic discussion function

Connectivity

Screw-lock microphone connector.
 Microphones sold separately.

D-MIC30SL 71.98.0053 D-MIC40SL 71.98.0054 D-MIC50SL 71.98.0055

- Two RJ 45 connectors for loop through cabling
- 3.5 mm stereo jack socket for headphones
- Plixus-powered

Software

To fully configure, manage, and use the unit, Televic's CoCon management software is required. The following standard licenses are available:

CoCon Discussion 71.98.1101 CoCon Signage 71.98.1102

Certifications


Region	Certification
Europe	CE

Specifications


Mechanical	
Material	Steel
Color	Tiger coating Carbon 01
Size (mm)	$180 \text{ (w)} \times 80 \text{ (h)} \times 70 \text{ (d)}$
Size packed (mm)	$235 (w) \times 120 (h) \times 85 (d)$
Weight (g)	640
Weight packed (g)	740
Electrical	
Voltage	48 VDC
Consumption	3.5 W
Speaker Output	
Maximum output	> 1 W
power	
Frequency response	200-20,000 Hz
Dynamic range	> 90 dB
THD @ nominal level	< 0.1%
Load impedance	8 Ω
Headphone Output	
Maximum output	> 10 mW
Frequency response	22-22,000 Hz
Dynamic range	> 90 dB
THD @ nominal level	< 0.1%
Load impedance	16-32 Ω
Microphone Input	
Dynamic range	> 90 dB
Frequency response	20-20,000 Hz
THD @ nominal level	0.1%

Diagrams

Front View (in mm)

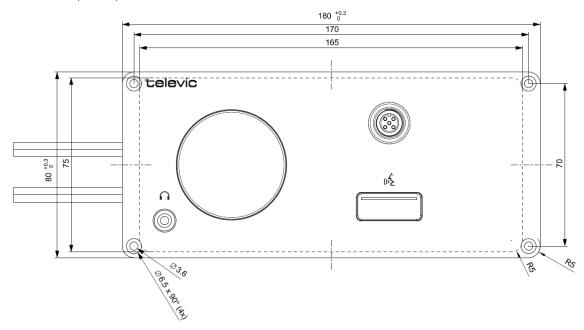

Side View (in mm)



All information copyright **Televic Conference**, 2015. Version 1.0, October 2015

Leo Bekaertlaan 1 · 8870 Izegem · Belgium

Tel. +32 51 30 30 45 Fax +32 51 31 06 70

E-mail: conference@televic.com

Web: http://www.televic-conference.com
Televic reserves the right to change this document without notice.