


4K60 4x4 HDMI Matrix with Seamless Switching, Scaling Outputs with Balanced Analog & Digital Audio De-embed

MX-0404-SCL

WyreStorm

Specification Sheet

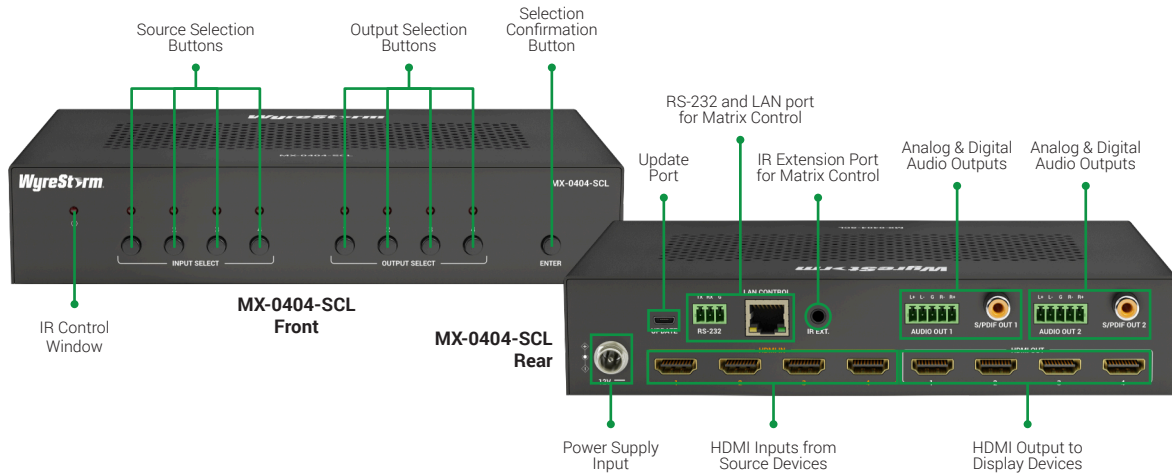

4K HDR 2160p 4:4:4 60 HDCP 2.2 CEC

WyreStorm - Powerful. Reliable. Simple.

Introduction

The MX-0404-SCL is a new 4K HDMI matrix switcher that supports seamless switching across all HDMI inputs and outputs. The matrix switcher outputs can be configured to work in different modes to meet different application requirements. In matrix mode, all four HDMI inputs and outputs are active and matrix switching.

Key Features

- Full 18Gbps support including up to 4K HDR 4:4:4/60
- Seamless switching between all four HDMI inputs and outputs
- Automatic full-range scaling on each output between 480i to 4K60
- Independent switching of both balanced analog and digital audio outputs

In the Box

- 1x MX-0404-SCL Matrix Switcher
- 1x IR Remote Handset
- 1x IR Receiver
- 2x 5-pin Terminal Block
- 2x Wall Mounting Brackets
- 1x Power Supply 12V 3A (US/UK/EU/AU)

Specifications

Audio and Video	
Inputs	4x HDMI Type-A 1x Micro USB 1x LAN port 1x RS-232 port 1x IR Ext
Outputs	4x HDMI Type-A 2x 5-pin Balanced Audio 2x Coaxial S/PDIF
Video Resolutions (Max)	1920x1080p @60Hz 3840x2160 @60Hz 4:4:4 8bit
Video Encoding	Uncompressed HDMI
HDMI Bandwidth	10.2Gbps
Audio Formats	2ch PCM
Maximum Pixel Clock	
Supported Standards	DCI RGB HDR10 HLG BT.2020
Communication and Control	
HDMI	HDMI 2.0 HDCP 2.3 EDID CEC
Ethernet	1x 8-pin RJ-45
Power	
Power Supply	12V DC 3A
Power Consumption	
Environmental	
Operating Temperature	0 to + 45°C (32 to + 113 °F), 10% to 90%, non-condensing
Storage Temperature	-20 to +70°C (-4 to + 158 °F), 10% to 90%, non-condensing
Maximum BTU	
Dimensions and Weight	
Length x Width x Height	215mm/8.46" x 42mm/1.65" x 140.2mm/5.51"
Weight	
Regulatory	
Safety and Emission	CE FCC RoHS RCM EAC

Note: WyreStorm reserves the right to change product specification, appearance or dimensions of this product at any time without prior notice.