Panasonic CONNECT







Professional DISPLAYS

Line-up Catalog October 2023



Worldwide Olympic and Paralympic Partner





Panasonic Professional Displays Lineup

High Brightnes









































SQE2 500cd/m²























EQ2 Series

500cd/m²





































































[★] The playable application format, GUI and operation procedure for the SQE2 and CQE2 Series' Media Player function are different from those of other models.

Panasonic Professional Displays Lineup



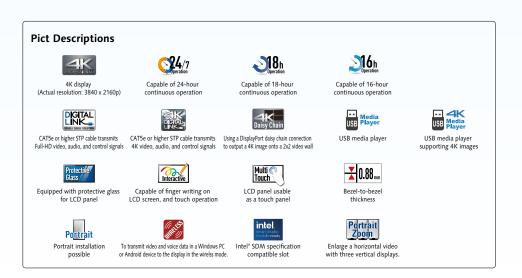

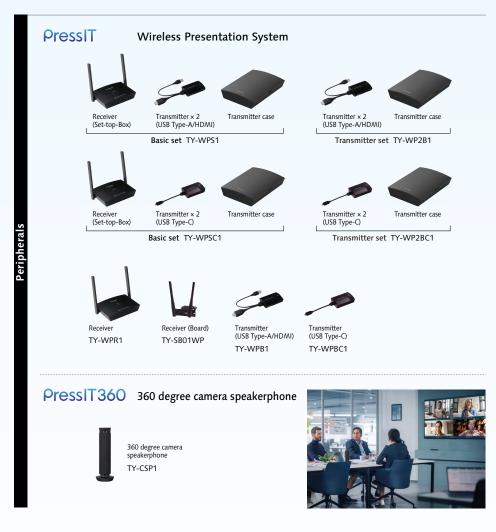

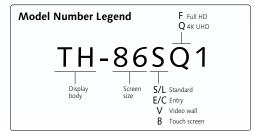

SQ1H Series





	Model no.	TH-86SQ1HW	TH-75SQ1HW				
	Screen Size (Diagonal)/Aspect Ratio	86-inch class (85.6"/2174. 2mm)/16:9	75-inch class (74.5"/1892.7mm)/16:9				
	Effective Display Area (W x H)	74.60" x 41.96" (1895.0 x 1065.9 mm)	64.94" x 36.53" (1649.6 x 927.9 mm)				
필	Resolution (H x V)	3840 x 2160	3840 x 2160				
DISPLAY PANEL	Brightness (Typ)	1200 cd/m ²	1500 cd/m ²				
<u>~</u>	Contrast Ratio	1200:1	1200:1				
Ľ	Dynamic Contrast Ratio	50000:1	50000:1				
ISF	Response Time	8.0 ms (G to G)	10.0 ms (G to G)				
	Viewing Angle (Horizontal/Vertical)	178°/ 178° (CR>10)	178°/ 178° (CR>10)				
	Panel Surface Treatment	Anti-glare low reflection type (Haze 3 %)	Anti-Glare type (Haze 1 %)				
	HDMI In	HDMI TYPE-A connector					
	DisplayPort In	DisplayPort x 1 (HI	DCP2.2 supported)				
	DisplayPort Out		DCP1.4 supported)				
	DVI-D In		4-pin x 1				
	Audio In (L/R)		5 mm) × 1 0.5 V [rms]				
_	PC In	-	_				
FERMINAL	Audio In (L/R)	-	_				
\$	Audio Out	Stereo Mini Jack (Ф 3.5 mm) × 1 0.5 V [rms], Var	riable (- ∞ - 0 dB) (1 kHz 0 dB Input,10 k Ω Load)				
ER/	Serial In	D-sub 9-pin x 1, R	S-232C Compatible				
F	LAN	RJ45 x 1 10BASE-T/100BASE-	-TX, Compatible with PJLink™				
	DIGITAL LINK/LAN	RJ45 x 1 Compatible with Long reach mo	de and PJLink™, 100BASE-TX (HDCP2.2)				
	IR In/Out	Stereo Mini Jack (Ф 3.5 mm) x 1/ x 1					
	USB	USB connector (TYPE A) x 2, DC 5 V/2 A, DC 5 V/1 A (USB3.0 is supported)					
	Sensor	4-pole sub-mini jack (Φ 2.5 mm) x 1					
	SLOT	Intel® SDM standard (3.3 V / max. 1.1 A, 12 V /max. 5.5 A)					
	Power Requirements	110-127V AC, 50 Hz/60 Hz					
	Power Consumption	735 W	720 W				
	Power Off Condition	Approx. 0.3 W	Approx. 0.3 W				
	Stand-by Condition	Approx. 0.5 W	Approx. 0.5 W				
	Dimensions (W x H x D) *Including handles.	75.95" x 43.31" x 3.75" (1929 x 1100 x 96 mm) ³	66.28" x 37.9" x 3.75" (1684 x 962 x 96 mm) ³				
	Carton Size (W x H x D)	84.5" x 50.8" x 11.1" (2145 x 1290 x 280 mm)	73.7" x 45.0" x 11.1" (1870 x 1143 x 280 mm)				
	Bezel Width	0.61" (15.5 mm) (T/B/L/R)	0.59" (14.9 mm) (T/B/L/R)				
AL.	Weight	Approx. 127.4 lbs. (57.8 kg)	Approx. 93.0 lbs. (42.2 kg)				
ER	Gross Weight	Approx. 160.9 lbs. (73 kg)	Approx. 123.4 lbs. (56 kg)				
GENERAL	Pitch for Wall-Hanging	VESA Compliant 23.6" x 15.8" (600 x 400 mm) M8	VESA Compliant 23.6" x 15.8" (600 x 400 mm) M8				
O	Built-in Speaker	20 W [10 W + 10 W]	20 W [10 W + 10 W]				
	Orientation	Landscape/Portrait ⁴	Landscape/Portrait ⁴				
	Tilting Angle	Landscape: 0-20 degrees forward Portrait: 0-20 degrees forward	Landscape: 0-20 degrees forward/backward Portrait: 0-20 degrees forward/backward				
	Operating Environment	Temperature: 32 °F to 104 °F (0 °C to 40 °C) ⁵ : 32 °F to 95 °F (0 °C to to 35 °C) ⁶ , Humidity: 20% to 80% (No condensation)					
	Storage Environment	Temperature: -4 °F to 140 °F (-20 °C to 60 °C), Humidity: 20 % to 80 % (No condensation)				
	Operating Time ⁷	24 h	n/day				
	12G-SDI Terminal Board	TY-SB01QS	TY-SB01QS				
	3G-SDI Terminal Board	-	TY-SB01SS				
2	Wireless Presentation System Receiver Board	TY-SB01WP	TY-SB01WP				
OPTIONS	Wall-hanging Bracket	-	TY-WK98PV1				
Ē	Early Warning Software ⁸	ET-SWA100/105 Series	ET-SWA100/105 Series				
Ö	Digital Interface Box	_	_				
	DIGITAL LINK Switcher	ET-YFB200G	ET-YFB200G				
	Auto Display Adjustment Upgrade Kit10	_	_				

- 1: HDCP2.2 supported. 2: RGB/YPbPr switchable. 3: Excluding handles. 4: When installing the display vertically, be sure that the power indicator comes to the right side.
- 5: For up to 4593 ft (1400 m) altitude. 6: For between 4593 ft to 9186 ft (1400 m to 2800 m) altitude.
- 7: In case of long time, the moving image is recommended to be displayed. If you display a still picture for an extended period, the image retention might remain on the screen. However, image retention can gradually disappear by displaying a moving images.
- 8: Part number suffix may differ depending on the license type.
- 9: Multi Monitoring & Control Software Ver.2.0 or later is required. Part number suffix may differ depending on the license type.
- 10: Download the latest Video Wall Manager from Global Website in advance. (https://panasonic.net/cns/prodisplays/download/software/www/)



Preliminary Available from CY2023 Q4





Model no.	TH-98SQ2HW	TH-86SQ2HW				
Screen Size (Diagonal)/Aspect Ratio	98-inch class (97.51"/2476.9 mm)/16:9	86-inch class (85.60"/2174.2 mm)/16:9				
Effective Display Area (W x H)	TBD	TBD				
Resolution (H x V)	TBD	TBD				
Brightness (Typ)	700 cd/m ²	700 cd/m ²				
Contrast Ratio	1200:1	TBD				
Dynamic Contrast Ratio Possessor Time	TBD	TBD				
Response Time	TBD	TBD				
Viewing Angle (Horizontal/Vertical)	178° / 178° (CR>10)	178° / 178° (CR>10)				
Panel Surface Treatment	Anti-Glare (Haze 25 %)	Anti-Glare (Haze 25 %)				
HDMI™ In	HDMI TYPE A Connector	x 3 (HDCP2.2 supported)				
USB	USB Connector (TYPE-A) x 2, (Ty	ype-C) x 1, Internal (Type-A) x 1				
PC In	Mini D-sub	15-pin x 1				
Audio In (L/R)	Stereo Mini J	lack (M3) x 1				
Audio III (L7K) Audio Out Serial In	Stereo Mini J	lack (M3) x 1				
Serial In	D-sub 9-pin x 1, RS	S-232C Compatible				
LAN	RJ45 x 1 compatible with PJLink™ 10BASE-T/100BASE-TX					
IR In	Stereo Mini Jack (M3) x 1					
SLOT	Intel® SDM standard (3.3 V /	max. 1.1 A, 12 V /max. 5.5 A)				
Power Requirements	110-127 V AC, 50 Hz/60 Hz	110-127 V AC, 50 Hz/60 Hz				
Power Consumption	TBD	TBD				
Power Off Condition	0 W	0 W				
Stand-by Condition	TBD	TBD				
Dimensions (W x H x D) ¹	86.36" x 49.43" x 3.15" (2193.4 x 1255.3 x 80 mm) (TBD)	75.95" x 43.31" x 2.74" (1929 x 1100 x 70 mm) (TBD)				
Carton Size (W x H x D)	TBD	TBD				
Bezel Width	TBD	TBD				
Weight	TBD	TBD				
Gross Weight Ditch for Wall-Hanging	TBD	TBD				
Pitch for Wall-Hanging	VESA Compliant 23.6" x 15.8" (600 x 400 mm)					
Built-in Speaker	20 W [10 V	W + 10 W]				
Orientation ²	Landscap	e/Portrait				
Tilting Angle ³	0-20 degrees forward with	landscape/portrait setting				
Operating Environment	TBD					
Storage Environment	TE	-				
Operating Time ⁴	24 h	/day				
2 12G-SDI Terminal Board	TY-SB01QS	TY-SB01QS				
12G-SDI Terminal Board Wireless Presentation System Receiver Board Farly Warning Software ⁵	TY-SB01WP	TY-SB01WP				
Early Warning Software ⁵	ET-SWA100/105 Series	ET-SWA100/105 Series				

- 1: Excluding remote control receiver.
- 2: When installing the display vertically, be sure that the power indicator comes to the right side.
- 3: Please contact your sales representative with regard to the tilt angle before installation.
- 4: In case of long time, the moving image is recommended to be displayed. If you display a still picture for an extended period, the image retention might remain on the screen. However, image retention can gradually disappear by displaying a moving images.
- 5: Multi Monitoring & Control Software Ver.2.1 or later is required. Suffix of the part number may differ depending on the license type.





SQ2H Series

Preliminary Available from CY2023 Q4











Model no.	TH-75SQ2HW	TH-65SQ2HW		TH-55SQ2HW	TH-50SQ2HW	TH-43SQ2HW		
Screen Size (Diagonal)/Aspect Ratio	75-inch class (74.51"/1892.7 mm)/16:9	65-inch class (64.52"/1638.9 mm)/16:9	5	55-inch class (54.63"/1387.8 mm)/16:9	50-inch class (49.50"/1257.3 mm)/16:9	43-inch class (42.51"/1079.8 mm)/16:9		
Effective Display Area (W x H)	TBD	TBD		TBD	TBD	TBD		
Resolution (H x V)	3840 x 2160	3840 x 2160		3840 x 2160	3840 x 2160	3840 x 2160		
Brightness (Typ)	700 cd/m ²	700 cd/m ²		700 cd/m ²	700 cd/m ²	700 cd/m ²		
Contrast Ratio	TBD	TBD		1200:1	1200:1	1200:1		
Dynamic Contrast Ratio	TBD	TBD		TBD	TBD	TBD		
Response Time	TBD	TBD		TBD	TBD	TBD		
Viewing Angle (Horizontal/Vertical)	178° / 178° (CR>10)	178° / 178° (CR>10)		178° / 178° (CR>10)	178° / 178° (CR>10)	TBD		
Panel Surface Treatment	Anti-glare treatment (Haze 25 %)	Anti-glare treatment (Haze 25 %)		Anti-glare treatment (Haze 25 %)	Anti-glare treatment (Haze 25 %)	Anti-glare treatment (Haze 25 %)		
HDMI™ In	HDMI TYPE A Connector	x 3 (HDCP2.2 supported)		Н	DMI TYPE A Connector x 3 (HDCP2.2 supporte	ed)		
USB	USB Connector (TYPE-A) x 2, (T	ype-C) x 1, Internal (Type-A) x 1		USB Cor	nector (TYPE-A) x 2, (Type-C) x 1, Internal (Ty	pe-A) x 1		
PC In	Mini D-sub	15-pin x 1			Mini D-sub 15-pin x 1			
Audio In (L/R)	Stereo Mini .	Jack (M3) x 1			Stereo Mini Jack (M3) x 1			
Audio Out	Stereo Mini Jack (M3) x 1			Stereo Mini Jack (M3) x 1				
Serial In	rial In D-sub 9-pin x 1,			D-sub 9-pin x 1, RS-232C Compatible				
LAN	RJ45 x 1 compatible with PJL	vith PJLink™ 10BASE-T/100BASE-TX		RJ45 x 1 compatible with PJLink™ 10BASE-T/100BASE-TX				
IR In	The second secon		Stereo Mini Jack (M3) x 1					
		max. 1.1 A, 12 V /max. 5.5 A)		Intel® SDM standard (3.3 V / max. 1.1 A, 12 V /max. 5.5 A)				
Power Requirements	110-127 V AC, 50 Hz/60 Hz	110-127 V AC, 50 Hz/60 Hz		AC 110-127 V 50 Hz/60 Hz	AC 110-127 V 50 Hz/60 Hz	AC 110-127 V 50 Hz/60 Hz		
Power Consumption	TBD	TBD		TBD	TBD	TBD		
Power Off Condition	TBD	TBD		TBD	TBD	TBD		
Stand-by Condition	TBD	TBD		TBD	TBD	TBD		
Dimensions (W x H x D) ¹	66.28" x 37.87" x 2.74" (1684 x 962 x 70 mm) (TBD)	57.58" x 32.97" x 2.72" (1463 x 838 x 69 mm) (TBD)	48.8	39" x 28.06" x 2.60" (1242 x 713 x 66 mm) (TBD)	44.43" x 25.56" x 2.60" (1129 x 649 x 66 mm) (TBD)	38.31" x 22.10" x 2.56" (973 x 562 x 65 mm) (TB		
Carton Size (W x H x D)	TBD	TBD		TBD	TBD	TBD		
Bezel Width	TBD	TBD		TBD	TBD	TBD		
Weight	Approx. 82.2 lbs. (37.3 kg) (TBD)	Approx. 65.5 lbs. (29.7 kg) (TBD)		Approx. 40.5 lbs. (18.4 kg) (TBD)	Approx. 34.8 lbs. (15.8 kg) (TBD)	Approx. 26.2 lbs. (11.9 kg) (TBD)		
Gross Weight	TBD	TBD		TBD	TBD	TBD		
Pitch for Wall-Hanging	VESA Compliant 23.6" x 15.8" (600 x 400 mm)	VESA Compliant 15.8" x 15.8" (400 x 400 mm)		TBD	TBD	VESA Compliant 7.9" x 7.9" (200 x 200 m		
Built-in Speaker	20 W [10 W + 10 W]	20 W [10 W + 10 W]		20 W [10 W + 10 W]	20 W [10 W + 10 W]	20 W [10 W + 10 W]		
Orientation ²	Landscap	pe/Portrait			Landscape/Portrait			
Tilting Angle ³	0-20 degrees forward with	h landscape/portrait setting		0-20 degrees forward with landscape/portrait setting				
Operating Environment	TE	BD		TBD				
Storage Environment				TBD				
Operating Time ⁴	24 h	n/day			24 h/day			
12G-SDI Terminal Board	TY-SB01QS	TY-SB01QS		TY-SB01QS	TY-SB01QS	TY-SB01QS		
Wireless Presentation System Receiver Board	TY-SB01WP	TY-SB01WP		TY-SB01WP	TY-SB01WP	TY-SB01WP		
Early Warning Software ⁵	ET-SWA100/105 Series	ET-SWA100/105 Series		ET-SWA100/105 Series	ET-SWA100/105 Series	ET-SWA100/105 Series		

^{1:} Excluding remote control receiver.
2: When installing the display vertically, be sure that the power indicator comes to the right side.

^{3:} Please contact your sales representative with regard to the tilt angle before installation.

 ^{1.} In case of long time, the moving image is recommended to be displayed. If you display a still picture for an extended period, the image retention might remain on the screen. However, image retention can gradually disappear by displaying a moving images.
 5. Multi Monitoring & Control Software Ver.2.1 or later is required. Suffix of the part number may differ depending on the license type.

SQE2 Series









Standard

Model no.	TH-98SQE2W	TH-86SQE2W	TH-75SQE2W	TH-65SQE2W	
Screen Size (Diagonal)/Aspect Ratio	98-inch class (97.51"/2476.9 mm)/16:9	86-inch class (85.60"/2174.2 mm)/16:9	75-inch class (74.51"/1892.7 mm)/16:9	65-inch class (64.52"/1638.9 mm)/16:9	
Effective Display Area (W x H)	84.99" x 47.80" (2158.8 x 1214.3 mm)	74.60" x 41.96" (1895.0 x 1065.9 mm)	64.94" x 36.53" (1649.6 x 927.9 mm)	56.23" x 31.63" (1428.4 x 803.5 mm)	
Resolution (H x V)	3840 x 2160	3840 x 2160	3840 x 2160	3840 x 2160	
Brightness (Typ)	500 cd/m ²	500 cd/m ²	500 cd/m ²	500 cd/m ²	
Contrast Ratio	1200:1	1100:1	1200:1	1200:1	
Dynamic Contrast Ratio	50000:1	50000:1	50000:1	50000:1	
Response Time (Typ.)	8.0 msec (G to G)	8.0 msec (G to G)	8.0 ms (typ.)	8.0 ms (typ.)	
Viewing Angle (Horizontal/Vertical)	178° / 178° (CR>10)	178° / 178° (CR>10)	178° / 178° (CR>10)	178° / 178° (CR>10)	
Panel Surface Treatment	Anti-Glare (Haze 25 %)	Anti-Glare (Haze 28 %)	Anti-Glare (Haze 25 %)	Anti-Glare (Haze 25 %)	
HDMI™ In/HDMI™ Out	HDMI™ TYPE A Connector x 4 (HDCP2.2 si		HDMI™ TYPE A Connector x 4 (HDCP2.2 sup		
DisplayPort In	DisplayPort x 1 (HI	11 1	DisplayPort x 1 (HD	1 1	
USB	Type A: DC 5 V/max. 0.9 Type A: DC 5 V/max. 0.5 Type A: DC 5 V/max. 0.5 A, U	A, USB 3.0 is supported, A, USB 2.0 is supported,	Type A: DC 5 V/max. 0.9 A Type A: DC 5 V/max. 0.5 A Type A: DC 5 V/max. 0.5 A, US Type A: DC 5 V/max. 0.5 A, US Type C: DC 5 V/max. 3.0 A, USB 3.0 is support	n, USB 3.0 is supported, n, USB 2.0 is supported, B 2.0 is supported (Internal),	
microSD	microSD/SDHC/S	DXC / MAX 1 TB	microSD/SDHC/SD	XC / MAX 1 TB	
Audio Out	Stereo Mini Jack (φ3.	5 mm) x 1, SPDIF x 1	Stereo Mini Jack (φ3.5	mm) x 1, SPDIF x 1	
Serial In	Stereo Mini Jack (φ3.5 mm) x 1, RS-232C Compatible	Stereo Mini Jack (φ3.5 mm)	x 1, RS-232C Compatible	
LAN	RJ45 x 1, 10BASE-T/10	OBASE-TX/1000BASE-T	RJ45 x 1, 10BASE-T/100	BASE-TX/1000BASE-T	
IR In	Stereo Mini Jaci	k (φ3.5 mm) x 1	Stereo Mini Jack	(φ3.5 mm) x 1	
SLOT	Intel® SDM sta	-	Intel® SDM star	dard (66 W)	
Wi-Fi	Yes (USB		Yes (Built-in) IEEE 802.11 a/b/	g/n Dual. Wi-Fi certificated	
Bluetooth®			er4.2, HID, A2DP		
HTML Browser	HTML5 (Vwed)		HTML5 (Vwed)		
Android-OS	Y	es	Yes		
Power Supply	AC 110-240 V 50 Hz/60 Hz, 7.7 A-3.8 A	AC 110-240 V 50 Hz/60 Hz, 4.2 A-2.1 A	AC 110-240 V 50 Hz/60 Hz, 3.9 A-1.9 A	AC 110-240 V 50 Hz/60 Hz, 3.5 A-1.8 A	
Power Consumption	450 W (Shipping Condition)	210 W (Shipping Condition)	185 W (Shipping Condition)	170 W (Shipping Condition)	
On Mode Average Power Consumption ¹	410 W (Picture Mode: [Natural])	205 W (Picture Mode: [Natural])	185 W (Picture Mode: [Natural])	165 W (Picture Mode: [Natural])	
Power Off Condition	Approx. 0 W	Approx. 0 W	Approx. 0 W	Approx. 0 W	
Stand-by Condition	Approx. 0.5 W	Approx. 0.5 W	Approx. 0.5 W	Approx. 0.5 W	
Dimensions (W x H x D) ²	87.25" x 50.02" x 3.87" (2216 x 1271 x 99 mm)	75.91" x 43.28" x 3.16" (1929 x 1100 x 81 mm)	66.28" x 38.09" x 3.92" (1684 x 968 x 100 mm)	57.32" x 32.84" x 3.78" (1456 x 835 x 96 mm)	
Carton Size (W x H x D)	95.87" x 66.30" x 15.24" (2435 x 1684 x 387 mm)	85.16" x 55.32" x 14.96" (2163 x 1405 x 380 mm)	76.70" x 46.07" x 8.27" (1948 x 1170 x 210 mm)	63.27"x 38.58" x 6.97" (1607 x 980 x 177 mm)	
Bezel Width	1.11" (28.2 mm) (T/R/L/R)	0.6" (15.3 mm) (T/R/L/R)	0.62" (15.7 mm) (T/R/L), 0.85" (21.5 mm) (B)	0.51" (12.9 mm) (T/R/L), 0.63" (16.1 mm) (B)	
Weight	Approx. 220.1 lbs. (99.8 kg)	Approx. 138.7 lbs. (62.9 kg)	Approx. 82.5 lbs. (37.4 kg)	Approx. 54.9 lbs. (24.9 kg)	
Gross Weight	Approx. 328.5 lbs. (149 kg)	Approx. 185.2 lbs. (84 kg)	Approx. 112.5 lbs. (57.4 kg)	Approx. 77.2 lbs. (35 kg)	
Pitch for Wall-Hanging	VESA Compliant 31.5" x 15.8" (800 x 400 mm), Installed by: M8 screws	VESA Compliant 23.6" x 15.8" (600 x 400 mm), Installed by: M8 screws	VESA Compliant 23.6" x 15.8" (600 x 400 mm), Installed by: M8 screws	VESA Compliant 23.6" x 15.8" (600 x 400 mm), Installed by: M6 screws	
Built-in Speaker	24	,	24 V		
Orientation	Landscape		Landscape/		
Tilting Angle ⁴	20 degrees forward and backwar		45 degrees forward and backward		
Operating Environment	•		· ·	1 1 0	
	32 °F to 95 °F (0 °C to 35 °C) for between 45 Humidity: 20 % to 80 % (No Condensation	on), Altitude: lower than 9186 ft (2800 m)	Temperature: 32 °F to 104 °F (0 °C to 40 °C) for up to 4593 ft (1400 m) altitude/ 32 °F to 95°F (0 °C to 35 °C) for between 4593 ft to 9186 ft (1400 m to 2800 m) altitude Humidity: 20 % to 80 % (No Condensation), Altitude: lower than 9186 ft (2800 m)		
Storage Environment	Temperature: -4 °F to 140 °F (-20 °C to 60 °C)		Temperature: -4 °F to 140 °F (-20 °C to 60 °C),		
Operating Time ⁵	24 h	/day	24 h/c	day	
12G-SDI Terminal Board ⁶	TY-SB01QS	TY-SB01QS	TY-SB01QS	TY-SB01QS	
Wireless Presentation System Receiver Board	TY-SB01WP	TY-SB01WP	TY-SB01WP	TY-SB01WP	
DIGITAL LINK Board ⁷	TY-SB01DL	TY-SB01DL	TY-SB01DL	TY-SB01DL	
Early Warning Software8	ET-SWA100/105 Series	ET-SWA100/105 Series	ET-SWA100/105 Series	ET-SWA100/105 Series	

- 1: Based on IEC 62087 Ed.2 measurement method. 2: Not including remote controller sensor box.
- 3: When installing the Display vertically, be sure to rotate clockwise and install.
- 3. When installing the Display let be described in the Control Contro

SQE2 Series







Model no.	TH-55SQE2W	TH-50SQE2W	TH-43SQE2W
Screen Size (Diagonal)/Aspect Ratio	55-inch class (54.63"/1387.8 mm)/16:9	50-inch class (49.50"/1257.3 mm)/16:9	43-inch class (42.51"/1079.8 mm)/16:9
Effective Display Area (W x H)	47.62" x 26.78" (1209.6 x 680.4 mm)	43.14" x 24.26" (1095.8 x 616.4 mm)	37.05" x 20.84" (941.1 x 529.4 mm)
Resolution (H x V) Brightness (Typ)	3840 x 2160	3840 x 2160	3840 x 2160
Brightness (Typ)	500 cd/m ²	500 cd/m ²	500 cd/m ²
Contrast Ratio	1200:1	5000:1	1200:1
Contrast Ratio Dynamic Contrast Ratio Response Time	50000:1	50000:1	50000:1
Response Time	8.0 ms (typ.)	9.5 ms (typ.)	8.0 ms (typ.)
Viewing Angle (Horizontal/Vertical)	178° / 178° (CR>10)	178° / 178° (CR>10)	178° / 178° (CR>10)
Panel Surface Treatment	Anti-Glare (Haze 25 %)	Anti-Glare (Haze 25 %)	Anti-Glare (Haze 25 %)
HDMI™ In/HDMI™ Out	HDMI™ TYPE A Connector x 4 (HDCP2.2 s	upported)/HDMI™×1 (HDCP2.2 supported)	HDMI™ TYPE A Connector x 4 (HDCP2.2 supported)/HDMI™x1 (HDCP2.2 supported
DisplayPort In	DisplayPort x 1 (H	DCP2.2 supported)	DisplayPort x 1 (HDCP2.2 supported)
USB	Type A: DC 5 V/max. 0.9 Type A: DC 5 V/max. 0.5 Type A: DC 5 V/max. 0.5 A, L Type C: DC 5 V/max. 3.0 A, USB 3.0 is suppo	A, USB 2.0 is supported,	Type A: DC 5 V/max. 0.9 A, USB 3.0 is supported, Type A: DC 5 V/max. 0.5 A, USB 2.0 is supported, Type A: DC 5 V/max. 0.5 A, USB 2.0 is supported (Internal), Type C: DC 5 V/max. 3.0 A, USB 3.0 is supported, DisplayPort Alternate mode compatible
microSD	microSD/SDHC/S	SDXC / MAX 1 TB	microSD/SDHC/SDXC / MAX 1 TB
microSD Audio Out	Stereo Mini Jack (φ3	.5 mm) x 1, SPDIF x 1	Stereo Mini Jack (φ3.5 mm) x 1, SPDIF x 1
Serial In	Stereo Mini Jack (φ3.5 mm	n) x 1, RS-232C Compatible	Stereo Mini Jack (φ3.5 mm) x 1, RS-232C Compatible
LAN		OBASE-TX/1000BASE-T	RJ45 x 1, 10BASE-T/100BASE-TX/1000BASE-T
IR In		k (φ3.5 mm) x 1	Stereo Mini Jack (φ3.5 mm) x 1
SLOT		andard (66 W)	Intel® SDM standard (50 W)
Wi-Fi	Yes (Built-in) IEEE 802.11 a/b/g/n Dual, Wi-Fi certificated		Yes (Built-in) IEEE 802.11 a/b/g/n Dual, Wi-Fi certificated
Bluetooth®	Yes (USB Dongle) Ver4.2, HID, A2DP		Yes (USB Dongle) Ver4.2, HID, A2DP
HTML Browser	HTML5 (Vwed)		HTML5 (Vwed)
Android-OS	Y		Yes
Power Supply	AC 110-240 V 50 Hz/60 Hz, 2.9 A-1.4 A	AC 110-240 V 50 Hz/60 Hz, 2.7 A-1.3 A	AC 110-240 V 50 Hz/60 Hz, 2.4 A-1.2 A
Power Consumption	115 W (Shipping Condition)	105 W (Shipping Condition)	110 W (Shipping Condition)
On Mode Average Power Consumption ¹	115 W (Picture Mode: [Natural])	100 W (Picture Mode: [Natural])	105 W (Picture Mode: [Natural])
Power Off Condition	Approx. 0 W	Approx. 0 W	Approx. 0 W
Stand-by Condition	Approx. 0.5 W	Approx. 0.5 W	Approx. 0.5 W
Dimensions (W x H x D) ²	48.64" x 27.92" x 3.28" (1236 x 710 x 84 mm)	44.12" x 25.43" x 3.27" (1121 x 646 x 83 mm)	37.92" x 21.85" x 3.26" (964 x 555 x 83 mm)
Carton Size (W x H x D)	53.90" x 34.41" x 6.50" (1369 x 874 x 165 mm)	47.83" x 30.51" x 6.50" (1215 x 775 x 165 mm)	41.34"x 28.27"x 7.01" (1050 x 718 x 178 mm)
Moight	0.43" (11 mm) (T/R/L), 0.54" (13.8 mm) (B)	0.39" (10 mm) (T/R/L), 0.61" (15.5 mm) (B)	0.33" (8.4 mm) (T/R/L), 0.47" (12 mm) (B)
Weight	Approx. 40.2 lbs. (18.2 kg)	Approx. 30.2 lbs. (13.2kg)	Approx. 23.4 lbs. (10.6 kg)
Bezel Width Weight Gross Weight Pitch for Wall-Hanging	Approx. 52.9 lbs. (24 kg)	Approx. 39.7 lbs. (18 kg)	Approx. 33.1 lbs. (15 kg)
Pitch for Wall-Hanging	VESA Compliant 15.8" x 15.8" (400 x 400 mm), Installed by: M6 screws	VESA Compliant 7.9" x 7.9" (200 x 200 mm), Installed by: M6 screws	VESA Compliant 7.9" x 7.9" (200 x 200 mm), Installed by: M6 screws
Built-in Speaker) W	16 W
Orientation	Landscap	e/Portrait ³	Landscape/Portrait ³
Tilting Angle ⁴	45 degrees forward and backwa	rd with landscape/portrait setting	45 degrees forward and backward with landscape/portrait setting
Operating Environment	Temperature: 32 °F to 104 °F (0 °C to 40 °C) for up to 4593 ft (1400 m) altitude/ 32 °F to 95°F (0 °C to 35 °C) for between 4593 ft to 9186 ft (1400 m to 2800 m) altitude Humidity: 20 % to 80 % (No Condensation), Altitude: lower than 9186 ft (2800 m)		Temperature: 32 °F to 104 °F (0 °C to 40 °C) for up to 4593 ft (1400 m) altitude/ 32 °F to 95°F (0 °C to 35 °C) for between 4593 ft to 9186 ft (1400 m to 2800 m) altitude Humidity: 20 % to 80 % (No Condensation), Altitude: lower than 9186 ft (2800 m)
Storage Environment	Temperature: -4 °F to 140 °F (-20 °C to 60 °C), Humidity: 20 % to 80 % (No Condensation)	Temperature: -4 °F to 140 °F (-20 °C to 60 °C), Humidity: 20 % to 80 % (No Condensation)
Operating Time ⁵	24 h	/day	24 h/day
1 9	TY-SB01QS	TY-SB01QS	TY-SB01QS
Wireless Presentation System Receiver Board	TY-SB01WP	TY-SB01WP	TY-SB01WP
12G-SDI Terminal Board ⁶ Wireless Presentation System Receiver Board DIGITAL LINK Board ⁷ Farly Warning Software ⁸	TY-SB01DL	TY-SB01DL	TY-SB01DL
Early Warning Software8	ET-SWA100/105 Series	ET-SWA100/105 Series	ET-SWA100/105 Series

^{1:} Based on IEC 62087 Ed.2 measurement method. 2: Not including remote controller sensor box.

^{3:} When installing the Display vertically, be sure to rotate clockwise and install.

^{4:} Please contact your sales representative with regard to the tilt angle before installation.
5: Displaying a still image for a long time may cause burn-in (image persistence artifacts), it could be mitigated when display video image.

^{6:} Some functions are not supported. 7: LAN control is not supported.

^{8:} Multi Monitoring & Control Software Ver. 2.1 or later is required. Suffix of the part number may differ depending on the license type.

EQ2 Series







	Model no.	TH-86EQ2W	TH-75EQ2W	TH-65EQ2W
	Screen Size (Diagonal)/Aspect Ratio	86-inch class (85.6"/2174.2 mm) /16:9	75-inch class (74.5"/1892.7 mm) /16:9	65-inch class (64.5"/1638.9 mm) /16:9
_	Effective Display Area (W x H)	74.60" x 41.96" (1895.0 x 1065.9 mm)	64.94" x 36.53" (1649.6 x 927.9 mm)	56.23" x 31.63" (1428.4 x 803.5 mm)
DISPLAY PANEL	Resolution (H x V)	3840 x 2160	3840 x 2160	3840 x 2160
PAI	Brightness (Typ)	500 cd/m ²	500 cd/m ²	500 cd/m ²
≻	Contrast Ratio	1200:1	1200:1	1200:1
۲	Dynamic Contrast Ratio	50000:1	50000:1	50000:1
ISF	Response Time	8.0 ms (G to G)	8.0 ms (G to G)	8.0 ms (G to G)
۵	Viewing Angle (Horizontal/Vertical)	178°/178° (CR>0)	178°/178° (CR>0)	178°/178° (CR>0)
	Panel Surface Treatment	Anti-Glare (Haze 25 %)	Anti-Glare (Haze 25 %)	Anti-Glare (Haze 25 %)
	HDMI In	HDMI TYPE-A Connector	x 3 (HDCP2.2 supported)	HDMI TYPE-A Connector x 3 (HDCP2.2 supported)
	Audio In (L/R)	Stereo Mini Jack (φ3.5 mm)	x 1 (Shared with AV/PC In)	Stereo Mini Jack (φ3.5 mm) x 1 (Shared with AV/PC In)
	PC In	Mini D-sub 15-	pin x 1 (Female)	Mini D-sub 15-pin x 1 (Female)
	Audio In (L/R)	Stereo Mini J	ack (M3) x 1	Stereo Mini Jack (M3) x 1
	USB	Type A: DC 5 V/1 A,		Type A: DC 5 V/1 A, USB 3.0 is supported,
TERMINAL		Type A: DC 5 V/2 A, Type C: max ~ 60W (Power Delivery	USB 2.0 is supported,	Type A: DC 5 V/2 A, USB 2.0 is supported, Type C: max ~ 60W (Power Delivery compatible), USB2.0 is supported, DisplayPort Alternate mode compatible
벁	Serial In	D-sub 9-pin x 1, R	·	D-sub 9-pin x 1, RS-232C Compatible
	DIGITAL LINK	D-300 3-piii x 1, 10	- S-232C Companible	D-sub 5-pin x 1, K3-232C Compatible
	LAN	PM5 × 1 PM5 10B	ASE-T/100BASE-TX	RJ45 x 1, RJ45 10BASE-T/100BASE-TX
	IR In/Out	Stereo Mini Jac		Stereo Mini Jack (M3) x 1 / x 1
	Audio Out	Stereo Mini Jac		Stereo Mini Jack (M3) x 1
	SLOT	SDM-S / SDM-L, 3.3 V/m		SDM-S / SDM-L, 3.3 V/max.1.1 A, 12 V/max 5.5 A
	Power Requirements	AC 110 - 240 V 50 Hz / 60 Hz	AC 110 - 240 V 50 Hz / 60 Hz	AC 110 - 240 V 50 Hz / 60 Hz
	Power Consumption	580 W	385 W	340 W
	Power Off Condition	Approx. 0.3 W	Approx. 0.3 W	Approx. 0.3 W
	Stand-by Condition	Approx. 0.5 W	Approx. 0.5 W	Approx. 0.5 W
	Dimensions (W x H x D ¹)	75.95" x 43.31" x 3.76" (1929 x 1100 x 96 mm) ¹	66.28" x 37.87" x 3.76" (1684 x 962 x 96 mm) ¹	57.58" x 32.97" x 3.68" (1463 x 838 x 94 mm) ¹
	Carton Size (W x H x D)	83.86" x 52.01"x 9.77" (2130 x 1321 x 248 mm)	73.63" x 45.00" x 11.03" (1870 x 1143 x 280 mm)	63.63" x 39.30" x 7.37" (1616 x 998 x 187 mm)
	Bezel Width	0.61" (15.5 mm) (T/R/L/B)	0.59" (14.9 mm) (T/R/L/B)	0.59" (14.9 mm) (T/R/L/B)
	Weight	Approx. 111.8 lbs. (50.7 kg)	Approx. 82.2 lbs. (37.3 kg)	Approx. 65.5 lbs. (29.7 kg)
¥	Gross Weight	Approx. 111.6 lbs. (50.7 kg) Approx. 156.5 lbs. (71.0 kg)	Approx. 62.2 lbs. (57.5 kg) Approx. 112.4 lbs. (51.0 kg)	Approx. 83.3 lbs. (29.7 kg) Approx. 88.2 lbs. (40.0 kg)
Ü	Pitch for Wall-Hanging	11		
GENERAL	rittii ior waii-naiigiiig	23.6" x 15.8" (600 x 400 mm) VESA Compliant, M8 (Screw hole depth: 0.8" (20 mm))	23.6" x 15.8" (600 x 400 mm) VESA Compliant, M8 (Scrnew hole depth:0.7" (18 mm))	VESA Compliant 15.8" x 15.8" (400 x 400 mm), M6 (Screw hole depth: 0.8" (20 mm))
	Built-in Speaker	20 W [10 V		20 W [10 W + 10 W]
	Orientation	Landscap	e/Portrait	Landscape/Portrait
	Tilting Angle ²	0-20 degrees forward/backward	with landscape/portrait setting	0-20 degrees forward/backward with landscape/portrait setting
	Operating Environment	Temperature: 32 °F to 104 °F (0 °C to 40 32 °F to 95 °F (0 °C to 35 °C) / Altitud Humidity: 20 % - 80	e 4593 ft to 9186 ft [1400-2800 m] /	Temperature: 32 °F to 104 °F (0 °C to 40 °C) / for up to 4593 ft (1400 m) altitude, 32 °F to 95 °F (0 °C to 35 °C) / Altitude 4593 ft to 9186 ft [1400-2800 m] / Humidity: 20 % to 80 % (No condensation)
	Storage Environment	Temperature: -4 °F to 140 °F (-20 °C to 60 °C)	/ Humidity: 20 % to 80 % (Non condensation)	Temperature: -4°F to 140 °F (-20 °C to 60 °C) / Humidity: 20 % to 80 % (Non condensation)
	Operating Time ³	18 h	/day	18 h/day
NS	Pedestal	_	TY-ST75PE9	TY-ST75PE9
OPTIONS	Wall-hanging Bracket	_	-	-
ОР	Early Warning Software ⁴	ET-SWA100/105 Series	ET-SWA100/105 Series	ET-SWA100/105 Series

^{2:} Please contact your sales representative with regard to the tilt angle before installation.

3: In case of long time, the moving image is recommended to be displayed. If you display a still picture for an extended period, the image retention might remain on the screen. However, image retention can gradually disappear by displaying a moving images.

4: Multi Monitoring & Control Software Ver.2.0 or later is required. Suffix of the part number may differ depanding on the licence type.

EQ2 Series







Model no.	TH-55EQ2W	TH-50EQ2W	TH-43EQ2W
Screen Size (Diagonal)/Aspect Ratio	55-inch class (54.6"/1387.8 mm) /16:9	50-inch class (49.5"/1257.3 mm) /16:9	43-inch class (42.5"/1079.8 mm) /16:9
Effective Display Area (W x H)	47.62" x 26.78" (1209.6 x 680.4 mm)	43.14" x 24.26" (1095.8 x 616.4 mm)	37.05" x 20.84" (941.1 x 529.4 mm)
Resolution (H x V)	3840 x 2160	3840 x 2160	3840 x 2160
Brightness (Typ)	500 cd/m ²	500 cd/m ²	500 cd/m ²
≻ Contrast Ratio	1200:1	5000:1	1200:1
Dynamic Contrast Ratio	50000:1	50000:1	50000:1
Response Time	8.0 ms (G to G)	9.5 ms (G to G)	8.0 ms (G to G)
Viewing Angle (Horizontal/Vertical)	178°/178° (CR>0)	178°/178° (CR>0)	178°/178° (CR>0)
Panel Surface Treatment	Anti-Glare (Haze 25 %)	Anti-Glare (Haze 25 %)	Anti-Glare (Haze 25 %)
HDMI In		r x 3 (HDCP2.2 supported)	HDMI TYPE-A Connector x 3 (HDCP2.2 supported)
Composite In	TIBMII TITE / Commedia		- The state of the confidence
DVI-D In			_
Audio In (L/R)	Stereo Mini Jack (m3.5 mm	x 1 (Shared with AV/PC In)	Stereo Mini Jack (φ3.5 mm) x 1 (Shared with AV/PC In)
PC In	1	pin x 1 (Female)	Mini D-sub 15-pin x 1 (Female)
Audio In (L/R)	Stereo Mini	<u> </u>	Stereo Mini Jack (M3) x 1
USB			
Z 03B		USB 3.0 is supported, USB 2.0 is supported,	Type A: DC 5 V/1 A, USB 3.0 is supported, Type A: DC 5 V/2 A, USB 2.0 is supported,
₹	Type C: max ~ 60W (Power Deliver		Type C: max ~ 60W (Power Delivery compatible), USB2.0 is supported,
R	DisplayPort Alterna	te mode compatible	DisplayPort Alternate mode compatible
Serial In	D-sub 9-pin x 1. R	S-232C Compatible	D-sub 9-pin x 1, RS-232C Compatible
DIGITAL LINK		_	_
LAN	RJ45 x 1. RJ45 10F	BASE-T/100BASE-TX	RJ45 x 1, RJ45 10BASE-T/100BASE-TX
IR In/Out		ck (M3) x 1 / x 1	Stereo Mini Jack (M3) x 1 / x 1
Audio Out		Jack (M3) x 1	Stereo Mini Jack (M3) x 1
SLOT		nax.1.1 A, 12 V/max 5.5 A	SDM-S / SDM-L, 3.3 V/max.1.1 A, 12 V/max 5.5 A
Power Requirements	AC 110 - 240 V 50 Hz / 60 Hz	AC 110 - 240 V 50 Hz / 60 Hz	AC 110 - 240 V 50 Hz / 60 Hz
Power Consumption	280 W	255 W	225 W
Power Off Condition	Approx. 0.3 W	Approx. 0.3 W	Approx. 0.3 W
Stand-by Condition	Approx. 0.5 W	Approx. 0.5 W	Approx. 0.5 W
Dimensions (W x H x D)	48.89" x 28.06" x 2.60" (1242 x 713 x 66 mm)	44.43" x 25.56" x 2.60" (1129 x 649 x 66 mm)	38.31" x 22.10" x 2.56" (973 x 562 x 65 mm)
Carton Size (W x H x D)	53.15" x 33.86" x 6.30" (1350 x 860 x 160 mm)	48.43" x 31.50" x 5.60" (1230 x 800 x 142 mm)	42.13" x 26.50" x 5.56" (1070 x 673 x 141 mm)
Bezel Width	0.55" (13.9 mm) (T/R/L/B)	0.59" (14.9 mm) (T/R/L/B)	0.55" (13.9 mm) (T/R/L/B)
Weight	Approx. 39.7 lbs. (18.0 kg)	Approx. 34.2 lbs. (15.5 kg)	Approx. 25.8 lbs. (11.7 kg)
Gross Weight	Approx. 55.1 lbs. (25.0 kg)	Approx. 46.3 lbs. (21.0 kg)	Approx. 35.3 lbs. (16.0 kg)
Pitch for Wall-Hanging	1.	x 15.8" (400 x 400 mm),	VESA Compliant 7.9" x 7.9" (200 x 200 mm),
Z 11.6.1.101.11.11.11.15.1.15		epth: 0.7" (18 mm))	M6 (Screw hole depth 0.6" (16 mm))
Built-in Speaker		W + 10 W]	20 W [10 W + 10 W]
Orientation		pe/Portrait	Landscape/Portrait
Tilting Angle ¹		d with landscape/portrait setting	0-20 degrees forward/backward with landscape/portrait setting
Operating Environment		0°C) / for up to 4593 ft (1400 m) altitude,	Temperature: 32 °F to 104 °F (0 °C to 40 °C) / for up to 4593 ft (1400 m) altitude,
Operating Environment	32 °F to 95 °F (0 °C to 35 °C) / Altitud	% (No condensation)	32 °F to 95 °F (0 °C to 35 °C) / Altitude 4593 ft to 9186 ft [1400-2800 m] / Humidity: 20 % to 80 % (No condensation)
Storage Environment	· · · · · · · · · · · · · · · · · · ·	/ Humidity: 20 % to 80 % (Non condensation)	Temperature: -4 °F to 140 °F (-20 °C to 60 °C) / Humidity: 20 % to 80 % (Non condensation)
Operating Time ²		n/day	18 h/day
♀ Pedestal	TY-ST55PE9	TY-ST43PE9	TY-ST43PE9
Wall-hanging Bracket	_	_	_
Early Warning Software ³	ET-SWA100/105 Series	ET-SWA100/105 Series	ET-SWA100/105 Series

^{1:} Please contact your sales representative with regard to the tilt angle before installation.

^{2:} In case of long time, the moving image is recommended to be displayed. If you display a still picture for an extended period, the image retention might remain on the screen. However, image retention can gradually disappear by displaying a moving images.

3: Multi Monitoring & Control Software Ver.2.0 or later is required. Suffix of the part number may differ depanding on the licence type.

CQE2 Series









Entry

Model no.	TH-98CQE2W	TH-86CQE2W	TH-75CQE2W	TH-65CQE2W	
Screen Size (Diagonal)/Aspect Ratio	98-inch (97.51"/2476.9 mm)/16:9	86-inch (85.60"/2174.2 mm)/16:9	75-inch (74.51"/1892.7 mm)/16:9	65-inch (64.52"/1638.9 mm)/16:9	
Effective Display Area (W x H)	84.99" x 47.80" (2158.8 x 1214.3 mm)	74.60" x 41.96" (1895.0 x 1065.9 mm)	64.94" x 36.53" (1649.6 x 927.9 mm)	56.23" x 31.63" (1428.4 x 803.5 mm)	
Resolution (H x V)	3840 x 2160	3840 x 2160	3840 x 2160	3840 x 2160	
rightness (Typ)	500 cd/m ²	400 cd/m ²	400 cd/m ²	500 cd/m ²	
Contrast Ratio	1200:1	1200:1	1200:1	1200:1	
Dynamic Contrast Ratio	50000:1	50000:1	50000:1	50000:1	
Response Time (Typ.)	8.0 msec (G to G)	8.0 msec (G to G)	8.0 ms (typ.)	8.0 ms (typ.)	
iewing Angle (Horizontal/Vertical)	178° / 178° (CR>10)	178° / 178° (CR>10)	178° / 178° (CR>10)	178° / 178° (CR>10)	
anel Surface Treatment	Anti-Glare (Haze 25 %)	Anti-Glare (Haze 28 %)	Anti-Glare (Haze 25 %)	Anti-Glare (Haze 25 %)	
DMI™ In/HDMI™ Out	HDMI™ TYPE A Connector x 4 (HDCP2.2 sı			supported)/HDMI™×1 (HDCP2.2 supported)	
ISB	Type A: DC 5 V/max. 0.9 Type A: DC 5 V/max. 0.5 Type A: DC 5 V/max. 0.5 A, U Type C: DC 5 V/max. 3.0 A, USB 3.0 is suppo	A, USB 2.0 is supported, SB 2.0 is supported (Internal),	Type A: DC 5 V/max. 0.5 Type A: DC 5 V/max. 0.5 A, L	P.A., USB 3.0 is supported, 5.A., USB 2.0 is supported, JSB 2.0 is supported (Internal), orted, DisplayPort Alternate mode compatible	
nicroSD	microSD/SDHC/S	DXC / MAX 1 TB	microSD/SDHC/S	SDXC / MAX 1 TB	
Audio Out	Stereo Mini Jack (φ3.	5 mm) x 1, SPDIF x 1	Stereo Mini Jack (φ3	.5 mm) x 1, SPDIF x 1	
Serial In	Stereo Mini Jack (φ3.5 mm) x 1, RS-232C Compatible	Stereo Mini Jack (φ3.5 mn	n) x 1, RS-232C Compatible	
LAN	RJ45 x 1, 10BASE-T/10	DBASE-TX/1000BASE-T	RJ45 x 1, 10BASE-T/100BASE-TX/1000BASE-T		
IR In	Stereo Mini Jaci	c (φ3.5 mm) x 1	Stereo Mini Jack (φ3.5 mm) x 1		
Wi-Fi	Yes (USB		Yes (Built-in) IEEE 802.11 a/	b/g/n Dual, Wi-Fi certificated	
Bluetooth®	Yes (USB Dongle) Bli	uetooth5.1 with BLE	Yes (USB Dongle) Ver4.2, HID, A2DP		
HTML Browser	HTML5 (Vwed)		HTML5 (Vwed)		
Android-OS	Y	es	Yes		
Power Supply	AC 110-127 V 50 Hz/60 Hz, 6.7 A	AC 110-127 V 50 Hz/60 Hz, 3.8 A	AC 110-127 V 50 Hz/60 Hz, 2.7 A	AC 110-127 V 50 Hz/60 Hz, 2.6 A	
Power Consumption	TBD (Shipping Condition)	TBD (Shipping Condition)	TBD (Shipping Condition)	TBD (Shipping Condition)	
On Mode Average Power Consumption1	TBD (Picture Mode: [Natural])	TBD (Picture Mode: [Natural])	TBD (Picture Mode: [Natural])	TBD (Picture Mode: [Natural])	
ower Off Condition	Approx. 0 W	Approx. 0 W	Approx. 0 W	Approx. 0 W	
tand-by Condition	Approx. 0.5 W	Approx. 0.5 W	Approx. 0.5 W	Approx. 0.5 W	
imensions (W x H x D) ²	87.25" x 50.02" x 3.87" (2216 x 1271 x 99 mm)		66.28" x 38.09" x 3.92" (1684 x 968 x 100 mm)	57.32" x 32.84" x 3.78" (1456 x 835 x 96 mm)	
arton Size (W x H x D)		85.16" x 55.32" x 14.96" (2163 x 1405 x 380 mm)	76.70" x 46.07" x 8.27" (1948 x 1170 x 210 mm)	63.27"x 38.58" x 6.97" (1607 x 980 x 177 mm)	
ezel Width	1.11" (28.2 mm) (T/R/L/R)	0.6" (15.3 mm) (T/R/L/R)	0.62" (15.7 mm) (T/R/L), 0.85" (21.5 mm) (B)	0.51" (12.9 mm) (T/R/L), 0.63" (16.1 mm) (B)	
Veight	Approx. 219.2 lbs. (99.4 kg)	Approx. 136.1 lbs. (61.7 kg)	Approx. 81.2 lbs. (36.8 kg)	Approx. 54.3 lbs. (24.6 kg)	
Gross Weight	Approx. 328.5 lbs. (149 kg)	Approx. 185.2 lbs. (84 kg)	Approx. 112.5 lbs. (51 kg)	Approx. 77.2 lbs. (25 kg)	
Pitch for Wall-Hanging	VESA Compliant 31.5" x 15.8" (800 x 400 mm), Installed by: M8 screws	VESA Compliant 23.6" x 15.8" (600 x 400 mm), Installed by: M8 screws	VESA Compliant 23.6" x 15.8" (600 x 400 mm), Installed by: M8 screws	VESA Compliant 23.6" x 15.8" (600 x 400 mm), Installed by: M6 screws	
Built-in Speaker	24	w	24	ł W	
Drientation	Landscape	e/Portrait ³	Landscap	e/Portrait ³	
ilting Angle ⁴	20 degrees forward and backwar			rd with landscape/portrait setting	
Operating Environment	Temperature: 32 °F to 104 °F (0 °C to 40	°C) for up to 4593 ft (1400 m) altitude/ 93 ft to 9186 ft (1400 m to 2800 m) altitude	Temperature: 32 °F to 104 °F (0 °C to 40 °C) for up to 4593 ft (1400 m to 10 dititude/ 32 °F to 95°F (0 °C to 35 °C) for between 4593 ft to 9186 ft (1400 m to 2800 m) altitude Humidity: 20 % to 80 % (No Condensation), Altitude: lower than 9186 ft (2800 m)		
Storage Environment	Temperature: -4 °F to 140 °F (-20 °C to 60 °C)	, Humidity: 20 % to 80 % (No Condensation)	Temperature: -4 °F to 140 °F (-20 °C to 60 °C), Humidity: 20 % to 80 % (No Condensation)	
Operating Time ⁵	24 h/day	16 h/day		n/day	
Early Warning Software ⁶	ET-SWA100/105 Series	ET-SWA100/105 Series	ET-SWA100/105 Series	ET-SWA100/105 Series	

^{1:} Based on IEC 62087 Ed.2 measurement method.

^{1:} Based on IEC 62/087 Ed.2 measurement method.
2: Not including remote controller sensor box.
3: When installing the Display vertically, be sure to rotate clockwise and install.
4: Please contact your sales representative with regard to the tilt angle before installation.
5: Displaying a still image for a long time may cause burn-in (image persistence artifacts), it could be mitigated when display video image.
6: Multi Monitoring & Control Software Ver. 2.1 or later is required. Suffix of the part number may differ depending on the license type.

CQE2 Series







Model no.	TH-55CQE2W	TH-50CQE2W	TH-43CQE2W
Screen Size (Diagonal)/Aspect Ratio	55-inch (54.63"/1387.8 mm)/16:9	50-inch (49.50"/1257.3 mm)/16:9	43-inch (42.51"/1079.8 mm)/16:9
Effective Display Area (W x H)	47.62" x 26.78" (1209.6 x 680.4 mm)	43.14" x 24.26" (1095.8 x 616.4 mm)	37.05" x 20.84" (941.1 x 529.4 mm)
Resolution (H x V)	3840 x 2160	3840 x 2160	3840 x 2160
Brightness (Typ)	500 cd/m ²	500 cd/m ²	500 cd/m ²
Contrast Ratio	1200:1	5000:1	1200:1
Dynamic Contrast Ratio	50000:1	50000:1	50000:1
Response Time	8.0 ms (typ.)	9.5 ms (typ.)	8.0 ms (typ.)
Viewing Angle (Horizontal/Vertical)	178° / 178° (CR>10)	178° / 178° (CR>10)	178° / 178° (CR>10)
Panel Surface Treatment	Anti-Glare (Haze 25 %)	Anti-Glare (Haze 25 %)	Anti-Glare (Haze 25 %)
HDMI™ In/HDMI™ Out	HDMI™ TYPE A Connector x 4 (HDCP2.2 si	upported)/HDMI™×1 (HDCP2.2 supported)	HDMI™ TYPE A Connector x 4 (HDCP2.2 supported)/HDMI™x1 (HDCP2.2 suppor
USB	Type A: DC 5 V/max. 0.9 Type A: DC 5 V/max. 0.5 Type A: DC 5 V/max. 0.5 A, U Type C: DC 5 V/max. 3.0 A, USB 3.0 is suppo	A, USB 2.0 is supported, SB 2.0 is supported (Internal),	Type A: DC 5 V/max. 0.9 A, USB 3.0 is supported, Type A: DC 5 V/max. 0.5 A, USB 2.0 is supported, Type A: DC 5 V/max. 0.5 A, USB 2.0 is supported (Internal), Type C: DC 5 V/max. 3.0 A, USB 3.0 is supported, DisplayPort Alternate mode compat
microSD	microSD/SDHC/S	DXC / MAX 1 TB	microSD/SDHC/SDXC / MAX 1 TB
Audio Out	Stereo Mini Jack (φ3.	5 mm) x 1, SPDIF x 1	Stereo Mini Jack (φ3.5 mm) x 1, SPDIF x 1
Serial In	Stereo Mini Jack (φ3.5 mm) x 1, RS-232C Compatible	Stereo Mini Jack (φ3.5 mm) x 1, RS-232C Compatible
LAN	RJ45 x 1, 10BASE-T/10	OBASE-TX/1000BASE-T	RJ45 x 1, 10BASE-T/100BASE-TX/1000BASE-T
IR In	Stereo Mini Jac	k (φ3.5 mm) x 1	Stereo Mini Jack (φ3.5 mm) x 1
Wi-Fi	Yes (Built-in) IEEE 802.11 a/l	b/g/n Dual, Wi-Fi certificated	Yes (Built-in) IEEE 802.11 a/b/g/n Dual, Wi-Fi certificated
Bluetooth®	Yes (USB Dongle)	Ver4.2, HID, A2DP	Yes (USB Dongle) Ver4.2, HID, A2DP
HTML Browser	HTML5	(Vwed)	HTML5 (Vwed)
Android-OS	Ye	es	Yes
Power Supply	AC 110-127 V 50 Hz/60 Hz, 1.9 A	AC 110-127 V 50 Hz/60 Hz, 1.7 A	AC 110-127 V 50 Hz/60 Hz, 1.8 A
Power Consumption	TBD (Shipping Condition)	TBD (Shipping Condition)	TBD (Shipping Condition)
On Mode Average Power Consumption1	TBD (Picture Mode: [Natural])	TBD (Picture Mode: [Natural])	TBD (Picture Mode: [Natural])
Power Off Condition	Approx. 0 W	Approx. 0 W	Approx. 0 W
Stand-by Condition	Approx. 0.5 W	Approx. 0.5 W	Approx. 0.5 W
Dimensions (W x H x D) ²	48.64" x 27.92" x 3.28" (1236 x 710 x 84 mm)	44.12" x 25.43" x 3.27" (1121 x 646 x 83 mm)	37.92" x 21.85" x 3.26" (964 x 555 x 83 mm)
Carton Size (W x H x D)	53.90" x 34.41" x 6.50" (1369 x 874 x 165 mm)	47.83" x 30.51" x 6.50" (1215 x 775 x 165 mm)	41.34"x 28.27"x 7.01" (1050 x 718 x 178 mm)
Bezel Width	0.43" (11 mm) (T/R/L), 0.54" (13.8 mm) (B)	0.39" (10 mm) (T/R/L), 0.61" (15.5 mm) (B)	0.33" (8.4 mm) (T/R/L), 0.47" (12 mm) (B)
Weight	Approx. 39.5 lbs. (17.9 kg)	Approx. 29.6 lbs. (13.4 kg)	Approx. 22.7 lbs. (10.3 kg)
Gross Weight	Approx. 52.9 lbs. (24 kg)	Approx. 39.7 lbs. (18 kg)	Approx. 33.1 lbs. (15 kg)
Pitch for Wall-Hanging	VESA Compliant 15.8" x 15.8" (400 x 400 mm), Installed by: M6 screws	VESA Compliant 7.9" x 7.9" (200 x 200 mm), Installed by: M6 screws	VESA Compliant 7.9" x 7.9" (200 x 200 mm), Installed by: M6 screws
Built-in Speaker	20	W	16 W
Orientation	Landscape	e/Portrait ³	Landscape/Portrait ³
Tilting Angle ⁴	45 degrees forward and backwar	d with landscape/portrait setting	45 degrees forward and backward with landscape/portrait settin
Operating Environment		0°C) for up to 4593 ft (1400 m) altitude/ 93 ft to 9186 ft (1400 m to 2800 m) altitude on), Altitude: lower than 9186 ft (2800 m)	Temperature: 32 °F to 104 °F (0 °C to 40 °C) for up to 4593 ft (1400 m) altitude/ 32 °F to 95°F (0 °C to 35 °C) for between 4593 ft to 9186 ft (1400 m to 2800 m) altitu Humidity: 20 % to 80 % (No Condensation), Altitude: lower than 9186 ft (2800 m)
Storage Environment	Temperature: -4 °F to 140 °F (-20 °C to 60 °C)	, Humidity: 20 % to 80 % (No Condensation)	Temperature: -4 °F to 140 °F (-20 °C to 60 °C), Humidity: 20 % to 80 % (No Condensation
Operating Time ⁵	16 h	/day	16 h/day
Early Warning Software ⁶	ET-SWA100/105 Series	ET-SWA100/105 Series	ET-SWA100/105 Series

^{1:} Based on IEC 62087 Ed.2 measurement method.

^{1:} Based on IEC 62/087 Ed.2 measurement method.
2: Not including remote controller sensor box.
3: When installing the Display vertically, be sure to rotate clockwise and install.
4: Please contact your sales representative with regard to the tilt angle before installation.
5: Displaying a still image for a long time may cause burn-in (image persistence artifacts), it could be mitigated when display video image.
6: Multi Monitoring & Control Software Ver. 2.1 or later is required. Suffix of the part number may differ depending on the license type.



SQ1H EQ2

Elaborate 4K Picture Quality down to the Tiniest Details

SQ1H SQ2H SQE2 EQ2 CQE2

With approximately 8,290,000 pixels, about four times the pixels of a Full-HD display, images are highly detailed. This dynamic, large-screen display achieves true-to-life finely nuanced images. With an optimal viewing distance of 1.5 times the screen height, the 4K display renders the information you want to transmit with excellent clarity.



* Images are simulated

Supports HDR and BT.2020 Emulation

SQ1H EQ2

The SQ1H Series supports HDR (High Dynamic Range) (PQ and HLG). Image reproduction is stunning, from deepest black to sparkling bright highlights. Additionally, they have emulation mode for BT.2020. This enables an emulation display to support the wide color gamut of the ITU-R BT.2020 standard.

Supports the Next-Generation Intel® SDM Specification

SQ1H SQ2H SQE2

The SQ1H/SQ2H/SQE2 Series are equipped with the new Intel® SDM specification slot standard that supports 4K signals. Combined with the interface board, you can easily use a built-in PC and add various interfaces.

Slot Standard



High Color Reproduction (6-Axis & 12-Axis Color Correction)



The color space on LCD displays tends to narrow when the luminance level drops, and it's often accompanied by color phase shifts. Six Axis Coordinate Correction applies image processing to balance the six axes of the three primary colors (RGB) and their complementary colors (CMY).

3-Axis (RGB) Color Correction







* Images are simulated

Portrait Installation Capability

* Expect the CQE2 Series.

When the Large size display is installed vertically, it can display a person in almost life-size dimensions. It is ideal for digital signage use because it faithfully reproduces the textures and colors of a model's clothing and accessories. It helps to maintain a high-quality brand image. Vertical installation also has no effect on the lifetime of the panel.



Easy Display of Images Optimized for the Display Content

Conventional display panels are preset with display modes such as Standard and Dynamic. The SQ1H and EQ2 Series comes with an extensive display menu to let you select the most suitable mode for the content to be displayed and the viewing environment. You can select the best mode for the video source and



*Although the term "DICOM" is used, this product is not medical equipment.

Do not use displayed images for medical purposes such as examination or diagnosis

Standard


• Refine Enhancer

the place of display.

Corrects blurry image contours resulting from resizing, etc., to improve the image resolution.

•MPEG Noise Reduction


Noise reduction suppresses the block noise and mosquito noise that are characteristic of digital video signals. This faithfully reproduces the inherent beauty of the image.

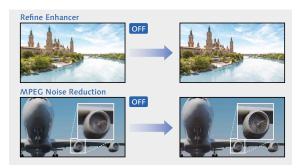

Multi Input Screen Capability with No Processor Required

gradation.

Multi Input Screen Capability with No Processor Required The SQ1H Series can simultaneously display multiple images on a single screen. In addition to 4 multi screens, the SQ1H Series can display 2 screens, such as PinP and PbyP. This is ideal for checking details in various applications, such as videoconferences, digital signage, and surveillance monitoring.



Brilliant, High-Quality over 1200 cd/m² Images for Bright Lobbies

The SQ1H Series provides highly visible signage even in open spaces with natural lighting. A panel with a wide viewing angle is used, and it has an eye-catching effect even when people are moving.

*TH-86SQ1H is 1200 cd/m2, TH-75SQ1H is 1500 cd/m2.



22 23

SO11

SQ1





SQ1H

SQ1H EQ2

SQ1H SQE2 EQ2

SQ1H SQE2 EQ2 CQE2

Dynamic Signage is Possible with the Portrait Zoom

SQ1H SQ2H EQ2 HDMI/USB/SLOT

Split the content from image sources, and enlarge the display in a portrait orientation. There is no need to use a special device, such as a processor, while creating content from various images. Placing three 65-inch models vertically creates a display equivalent to 112 inches. This enables highly visible store signage.

* The picture quality may be degraded when the image

Set to the input other than [Screen Transfer] [MEMORY VIEWER] / [WHITEBOARD], and then set [Portrait settings]. *The SQ1 Series supports connection with the DVI/DisplayPort.



One image can be divided into three and the sres selected



selected area

Enlarge the

Three units are combined for large-screen signage

*These functions on the 98/86SQ1 models are compatible with the Software Main Version 3.0000 or later. (For the EQ2 Series: Software Main Version 2.000 or later is required.) Please contact your sales representative with regard to details.

Efficiency and Reliability for Continuous 24-hour Operation

The use of highly durable panel materials and quality electronic components ensures dependable 24-hour operation seven days a week.

* Display of moving images is recommended when panels are in use for long periods to prevent image retention. Note that image burn-in can be gradually rectified with the periodical display of moving images.





SQ1H EQ2

EQ2

A Stylish and slim design Accentuates the Image

The stylish and slim design complies with the ADA standard (a depth of less than 4-inch (approx.100 mm) with brackets) in all important aspects. The narrow bezel displays higher-impact images, further enhancing the 4K picture quality. The slim profile isn't the least oppressive even when installed in a hanging configuration.

* The availability of the TY-WK98PV1 varies depending on the country.



* ADA stands for the "Americans with Disabilities Act," a United States law made to protect people with disabilities from discrimination

Fanless Design

Standard models robust fanless design prevents problems caused by the intake of dusty air. The displays can be safely installed and operated in high-traffic environments.

Enables Writing on the Display Screen

The EQ2 Series is equipped with a whiteboard function. By setting the USB receiver of the mouse on the display, you can use the mouse to write on the display screen and zoom in/out. This is useful for facilitating efficient meetings.



HDMI-CEC Device Linking Supported

HDMI-CEC compatible devices can be connected to the display by an HDMI cable, enabling the basic operations (such as power ON/OFF) of the compatible devices to be controlled by the display's remote control. Power ON/OFF of the display can also be switched using only the remote control (or main unit buttons) of the HDMI-CEC compatible devices.

* The control of all devices cannot be guaranteed.




Customizable Original Screen

An original image created by your company or other desired picture can be displayed when the unit is turned on and when there is no input signal. The image data for the original screen can be transferred and stored in the display unit via a USB memory. This function allows a company logo mark, brand image, etc., to be displayed when there is no input signal.

- · Certain limitations apply to the format for original screen.
- * The SO1/EO2 Series is compatible with 3480 x 2160 and 1920 x 1080 resolution.



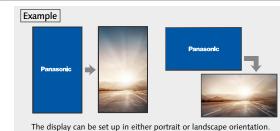

4K Daisy Chain can be Constructed with Even Higher Resolution Multi-Screens

The SQ1H Series is equipped with DisplayPort input/output terminals. Construct a multi-screen that can output 4K images by installing multiple units and connecting them in a daisy chain.



Failover and Failback Safeguards for Mission Critical Situations

These models are equipped with a variety of signal input terminals. If the main video and audio signals are interrupted, the system immediately switches to alternative signals. This makes it ideal for mission critical control rooms and surveillance centers. If the main signals are restored, the original image is displayed.

* The usable combinations of main and backup signals are limited For details, see the product website.







SQ1H EQ2

Simple Signage Operation with No STB

* The playable application format, GUI and operation procedure for the SQE2 Series' Media Player function are

The display can automatically start showing pictures when a USB memory containing data is inserted. The display unit can be used as digital signage without a set-top box or PC. And the content can be displayed smoothly without including the black screen display. What's more, the order of content playback and playback time can be programmed Content can also be rewritten and multiple displays can be operated via LAN.*

- · If it is difficult to insert a USB memory due to installation conditions, use a commercially available extension cable.
- · Some files cannot be played back even if they are in the supported format. Regarding restrictions, see the operation manual.
- * Multi Monitoring & Control Software (free) is required.

USB memor ■ Applicable format JPG, JPEG, JPE, BMP* AVI, MKV, ASF, WMV, TS, MTS, MP4, 3GP, MOV, FLV, F4V

Playback by one unit



Simultaneous playback by multiple units



* BMP is supported only by the EO2 Series.

* The SQ1H/SQ1/EQ2 Series is compatible with the 4K signal.

One of up to four display units becomes the parent unit, and the other units display images in sync with the parent unit. This enables the display of images in perfect sync when the panels are arranged next to each other.







Play USB Content Instantly

* The playable application format, GUI and operation procedure for the SQE2 Series' Media Player function are different from those of other model

Playing Full HD video, still images, and digital documents from USB storage devices couldn't be easier. Just insert a thumb drive into the USB port and start presenting without needing to connect a PC. The Memory Viewer app enables image* (JPEG, BMP) and video* (WMV, AVI, MOV, MP4, MPG) selection from handy thumbnail previews.

* In some cases, files may not be viewable even if they are encoded in a supported format.

■ Applicable format

Still Image	JPG, JPEG, JPE, BMP
Motion Image	AVI, MKV, ASF, MWV, GS, MGS, MP4, 3GP, MOV, FLV, F4V

* The SQE2 and CQE2 Series are not compatible with WMV, MTS and F4V.



Cloning Function Speeds Up Multiple Display Setup


When installing multiple displays, the Cloning function lets you use a USB memory (or LAN network) to copy the settings of a parent display to other units, thus greatly shortening the setup time.

- . [Date & Time], [Network Settings], [LAN Settings] and Display ID cannot be copied.
- . The Cloning function works only for displays with the



*[Options] are not supported by SQ1/EQ2.

* The GUI and operation procedure for the SQE2 Series' Cloning function are different from those of other models



USB Memory Network Settings

Using a USB memory device, the network setting can be made for multiple displays. Individual IP addresses for each unit are automatically set.



Note: Setting images are simulated.

A Conference Room Audio Mode for Easier Listening

SQ1H EQ2

This function makes voices easier to listen to in video conferences or when the video is displayed, for improved audio quality. A setting is also possible to improve sound muffling when the display is mounted on a wall. If the automatic sound volume adjustment function is used, information sharing is possible with the sound level at a comfortable level.

* This function on the 98/86SO1 Series is compatible with the Software Main Version 4.0000 or later (for the EQ2 Series, Soft Main Version 2.000 or later is required.) Please contact your sales representative with regard to details.

Make Your Signage Easy with Panasonic Application







The SQ1H, SQ2H and EQ2 Series features a USB Media Player function that allows easy signage playback. Content Management Software is an application software for scheduling digital signage playback on a computer. It also allows power ON/OFF to be set.

For more information about Content Management Software Version 4.4.0, please visit:

https://panasonic.net/cns/prodisplays/download/software/

Play Content Automatically with Scheduling Function

Content Management Software for PC Version 3.3.1 (free) enables easy playlist creation with media support including combinations of still and video images. You can set up schedules for playing and closing your media playlist at predetermined dates and times



Convenient Playlist and Schedule Syncing

Playlists and schedules created with Content Management Software can be transferred to displays with USB memory, or via LAN. Synchronized playback on multiple displays is also supported.






DIGITAL LINK Function Enables Simple Installation and Low System Costs

Using DIGITAL LINK makes it possible to transmit video, audio and control signals over a long distance (up to 492 ft [150 m]) with a single LAN cable*. Easy cabling also reduces labor during setup. This provides transmission of high-quality images and sounds, as well as remote control.

* When connected with the [Long reach] mode, the maximum transmission distance is 492 ft (150 m). In this case, the unit can receive the signals of up to 1080/60p. A CAT5e (STP) cable or higher is required. This supports 4K video over distances of up to 164 ft (50 m) with a single

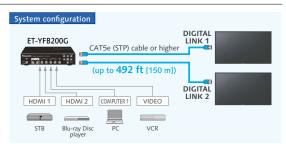


SQ1H

EQ2


Timer-Programmable Switching of Device Connection

The timer function of the display unit can be used to change connected signal source devices at a desired time. This allows an easy change of displayed content according to the application or the progress of an event.



Multi Monitoring & Control Software


Compatible with Multi Monitoring & Control Software for addition of new functions, such as automatic searching for map displays and registered devices. Displays and peripheral equipment on the intranet can be controlled and their status can be monitored. Also error notification and error indication can be detected by an indication monitoring function (for a fee) for improved maintenance.

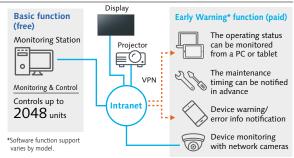


Choose the Installation to Match Your Application

Panasonic displays are designed for use in either portrait or horizontal orientation with no effect on panel color and lifespan, further reducing TCO. A tilt installation up to 45 degrees forward or backward is also possible. The angle can be adjusted for easy viewing when installed in a high location.

* The installable angle varies depending on the model. For details, see the specifications page for each model For more information on the specifications page, please visit the download page. (https://panasonic.net/cns/prodisplays/download/spec manual/)




Landscape



Smooth Switching of Presenters

These displays automatically switches source signals when the input signal for the current content stops or when an input signal other than the signal of the current content is received. When presenters change during a meeting, the displayed image can be switched easily by simply changing the cable connection, thus eliminating the need to operate the remote control.

- * The 2 switching inputs must be set in advance.
- * This function may not operate correctly depending on the image playback device.
- * Digital-digital switching is supported by the SQ/EQ

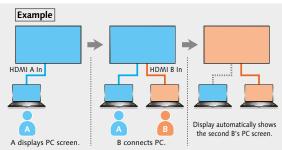

Built-in Speakers for the Playback of Content with Sound

All models are supported

EQ2

The display unit has built-in speakers so that it can playback content with sound without the connection of external speakers. This allows maximum use of a limited space for the installation of a large-screen display



SQ1H SQ2H SQE2

Supports LAN Control Connection

The display can be controlled by LAN or RS-232C. You can configure the display into your existing control system, and can control several devices simultaneously.



USB Pass Through Function to Save Time and Effort in Meeting Preparation

EQ2

USB devices can be connected to the display via a USB Type-A cable and controlled using a PC connected to the EQ2 via the USB Type-C port. If a camera or speakerphone is permanently connected to the display in a conference room, a user can just plug in their PC and immediately control the device to start the meeting.









VF/LFV Series







	AA - dal	TH-55VF2HW	TH-55VF2W	TH-55LFV9W
	Model no.			
	Screen size (Diagonal)/Aspect Ratio	55-inch class (54.6"/1387 mm)/16:9	55-inch class (54.6"/1387 mm)/16:9	55-inch class (54.6"/1387.8 mm)/16:9
핍	Effective Display Area (W x H)	47.6" x 26.7" (1209.6 x 680.3 mm)	47.6" x 26.7" (1209.6 x 680.3 mm)	47.62" x 26.78" (1209.6 x 680.4 mm)
Z	Resolution (H x V)	1920 x 1080	1920 x 1080	1920 x 1080
9	Brightness (Typ.)	700 cd/m²	500 cd/m²	500 cd/m ²
Ą	Contrast Ratio	1100:1	1100:1	1200:1
SPL	Dynamic Contrast Ratio	500000:1	500000:1	500000:1
<u>=</u>	Response Time	9.0 ms (G to G)	9.0 ms (G to G)	9.0 ms (G to G)
	Viewing Angle (Horizontal/Vertical)	178° / 178° (CR≥10)	178° / 178° (CR≥10)	178° / 178° (CR≥10)
	Panel Surface Treatment	Advanced Anti-Glare (Haze 28 %)	Advanced Anti-Glare (Haze 28 %)	Advanced Anti-Glare (Haze 28 %)
	HDMI In	HDMI Type A	Connector x 1	HDMI Type A Connector x 2
	VIDEO In	-	-	BNC x 1 (Shared with Component In)
	Audio In (L/R)	-	_	Stereo Mini Jack x 1 (Shared with Component In)
	Component/RGB In		_	BNC x 1 set (Shared with VIDEO In)
	Audio In (L/R)	-	-	Stereo Mini Jack x 1 (Shared with Video In)
	DisplayPort In	DisplayPort x 1 (DP1	.1a Dual Mode Only)	DisplayPort x 1 (DP1.1a / DP1.2)
	DisplayPort Out	-	-	DisplayPort x 1
	DVI-D In	DVI-D 24-pir		DVI-D 24-pin x 1 (Female)
	Audio In (L/R)	Stereo Mini Jack (M3)	x 1 (Shared with PC In)	Pin Jack (L+R) x 1 set (Shared with PC In)
¥	DVI-D Out	-		-
₹	PC In	Mini D-Sub 15-pin x 1 (Female)		Mini D-Sub 15-pin x 1 (Female)
≥	Audio In (L/R)	Stereo Mini Jack (M3) x 1 (Shared with DVI-D In)		Pin Jack (L+R) x 1 set (Shared with DVI-D In)
H	DVI-I Out	_		DVI-I 29-pin x 1
	USB	USB Connector (TYPE-A) x 1, DC 5 V/500 mA (USB2.0)		USB Connector (TYPE-A) x 1, DC 5V/500mA (USB2.0)
	Serial In/Out	D-Sub 9-pin x 1 (Male)/ x 1 (Female), RS-232C Compat	tible D-Sub 9-pin x 1 (Male) / x 1, RS-232C Compatible	2.5 mm Phone Jack x 1 / x 1
	DIGITAL LINK In/DIGITAL LINK Out	RJ45 x 1/ x 1, 100 BASE-TX, Compatible with long reach mode and PJLink™ (Shared with LAN)		_
	LAN	RJ45 x 1/ x 1, (100 BASE-TX, Compatible v	with PJLink™) (Shared with DIGITAL LINK)	RJ45 x 1, 10 BASE-T / 100 BASE-TX, Compatible with PJLink™
	IR In/Out	Stereo Mini Jack (M3) x 1/ x 1		Stereo Mini Jack (M3) x 1 / x 1
	Audio 1 In	Stereo Mini Jack (M3) x 1		_
	Audio 2 In	L/R Pin Jack x 1		_
	Audio Out	Stereo Mini Jack (M	3) x 1, 0.5 V [rms]	Stereo Mini Jack (M3) x 1 0.5 V [rms]
		Variable (- ∞ ~ 0 dB) (1 kHz 0 dB Input, 10 kΩ Load)		Variable (- ∞ ~ 0 dB) (1 kHz 0 dB Input, 10 k Ω Load)
	Power Requirements	110-127 V AC, 50 Hz/60 Hz	110-127 V AC, 50 Hz/60 Hz	110-127 V AC, 50 Hz/60 Hz
	Power Consumption	300 W	300 W	185 W
	Stand-by Condition	Approx. 0.5 W	Approx. 0.5 W	Approx. 0.5 W
	Dimensions (W x H x D)	47.66" x 26.82" x 3.83" (1210.6 x 681.3 x 97.3 mm)	47.66" x 26.82" x 3.83" (1210.6 x 681.3 x 97.3 mm)	47.78" x 26.94" x 3.86" (1213.4 x 684.2 x 98.0 mm)
	Carton Size (W x H x D)	55.0" x 33.4" x 11.1" (1395 x 848 x 280 mm)	55.0" x 33.4" x 11.1" (1395 x 848 x 280 mm)	55.0" x 33.4" x 11.1" (1395 x 848 x 280 mm)
	Bezel Width	T/B/L/R: 0.018" (0.44 mm)	T/B/L/R: 0.018" (0.44 mm)	L/T: 0.089" (2.25mm), R/B: 0.049" (1.25mm)
	Bezel to Bezel ¹	0.034" (0.88 mm) (Multi Screen)	0.034" (0.88 mm) (Multi Screen)	0.14" (3.5 mm) (Multi Screen)
₹	Weight	Approx. 50.7 lbs. (23.0 kg)	Approx. 50.7 lbs. (23.0 kg)	59.5 lbs. (27.0 kg)
Ė	Gross Weight	Approx. 75.0 lbs. (34.0 kg)	Approx. 75.0 lbs. (34.0 kg)	81.6 lbs. (37.0 kg)
岴	Pitch for Wall-Hanging	VESA compliant 15.8" >	(15.8" (400 x 400 mm)	VESA compliant 15.8" x 15.8" (400 x 400 mm)
U	External Speaker	_	-	8 Ω, 20 W [10W + 10 W] (10% THD)
	Orientation ²	Landscape	e/Portrait	Landscape/Portrait
	Tilting Angle ²	Vertica		Vertical Only
	Operating Environment	Temperature: 32 °F to 104 °F (0 °C to 40 °C)3 /32 °F to 95 °F	Temperature: 32 °F to 104 °F (0 °C to 40 °C) ³ /32 °F to 95 °F
		(0 °C to 35 °C)4 / Humidity: 20		(0 °C to 35 °C) ⁴ / Humidity: 20% to 80% (No Condensation)
	Storage Environment	Temperature: -4 °F to 140 °F (-20 °C to 60 °C)		Temperature: -4 °F to 140 °F (-20 °C to 60 °C)/Humidity: 10% to 90 % (Non condensation)
	Operating Time ⁵	24 h	*	24 h/day
	Cover Frame Kit	_	_	_
NS	Installation Mount	TY-VK55LV2	TY-VK55LV2	TY-VK55LV2
0	Early Warning Software ⁶	ET-SWA100/105 Series	ET-SWA100/105 Series	ET-SWA100/105 Series
Ā	Auto Display Adjustment Upgrade Kit ⁷	TY-VUK10	TY-VUK10	TU-VUK10
О	Multi Window Processor	-	-	_

^{1:} Bezel-to-Bezel distance means the combined top and bottom (or left and right) bezel width of adjacent displays in multi-screen. The gap between displays is not included. Note a gap of 0.02" (0.5 mm) or more is required when installing multiple displays.

^{2:} Please contact your sales representative with regard to the tilt angle before installation.

^{3:} For up to 4593 ft (1400 m) altitude.

^{4:} For between 4593 ft (1400m) to 9186 ft (2800 m) altitude.

^{5:} In case of long time, the moving image is recommended to be displayed. If you display a still picture for an extended period, the image retention might remain on the screen. However, image retention can gradually disappear by displaying a moving images.

^{6:} Multi Monitoring & Control Software Ver. 2.1 or later is required. Suffix of the part number may differ depending on the license type.

^{7:} Download the latest Video Wall Manager from Global Website in advance. (https://panasonic.net/cns/prodisplays/download/software/vwm/)

Narrow Bezel for Seamless Video Walls

Narrow frames on Panasonic's LCD Video Wall Series reduce bezel-to-bezel distance to a near-invisible 0.03"*. Even when viewed close-up, screen borders are almost indiscernible, resulting in truly spectacular large-format images.

* TH-55VF2H/55VF2 features 0.03" (0.88 mm), and TH-55LFV9 0.14" (3.5 mm), bezel-to-bezel distance. Bezel-to-bezel distance refers to the combined top and bottom (or left and right) bezel-width of adjacent displays in video-wall configuration. The gap between displays is not included. Note that a gap of 0.02" or more is required when installing multiple displays.





Improved Multi-Screen Video Visibility

When high-speed video is played on multiple screens in a video wall, some image misalignment can occur between vertically adjacent panels. VF2H, and VF2 Series feature a Reverse Scan Function that alternates the scanning direction of vertically adjacent displays to improve image alignment. Frame Control Function, meanwhile, adjusts the number of video frames displayed to reproduce images with natural fluidity.

■ Reverse Scan Function Reverses direction of image scanning to smoothly play enlarged video on multiple screens

Note: Images are simulated.

Delivers Stable Brightness for Up to 8 Years*

The VF2H, and VF2 Series incorporates Long Life mode and a new Auto Brightness Adjustment function. In Long Life mode, backlight brightness is optimized to extend product life. Auto Brightness Adjustment function corrects light output automatically according to the rate of backlight deterioration to maintain constant brightness for longer.

* Figure is approximate when operating continuously for 24 hours x 365 days.




affect brightness longevity and operating period. *On2* delivers approximately 60 % maximum specified backlight brightness. Auto brightness adjustment cannot be turned on if panel illumination period has exceeded 1,000 hours

Failover and Failback Safeguards Maintain Image Display

Digital signal inputs comprise one or two DVI-D terminals together with HDMI. DisplayPort, DIGITAL LINK*, and USB terminals. If primary audio-video signals are interrupted, the display immediately switches to an alternative input. This makes the Panasonic LCD Video Wall Series well suited for use in control rooms and in other applications where uninterrupted playback is essential.

* DIGITAL LINK available on VF2H, VF2 and VF1H only. Display Port available on VF2H, VF2 only

32



If AV signals via the primary input is interrupted, images are no longer displayed.




If the primary AV signal is interrupted, the system automatically switches to a backup input so video display is maintained

Note: Possible combinations of main/backup input signals are limited. For details, please visit the Panasonic website.

DIGITAL LINK Simplifies Installation at Lower Cost

VF2H/VF2

Based on HDBaseT™ technology, the DIGITAL LINK connection on VF2H, VF2 Series displays supports audio, video, and control signal transmission over long distances, and can also be used to daisy-chain multiple displays via a single cable. This eliminates the need for video splitters and other routing devices. The LFV9 Series, meanwhile, supports daisy chain via DVI with separate video and control (serial or IR) connections. Note: CAT5e or higher STP cable required.

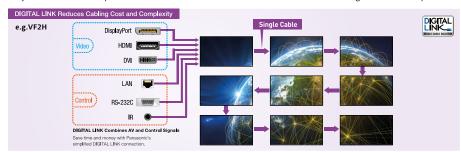

Installation Frame Simplifies Set-up





The optional Installation Mount makes it much easier to configure a video wall. There's no need for complicated display positioning, and fluctuations between installers are covered. It also saves time and cuts labor costs.

Video wall fluctuations occur when the bezels are not correctly aligned vertically and horizontally and the surfaces are not properly adjusted. Installation is quick and easy using the rigid frame, with easy adjustment using surface alignment magnets. This structure also makes the displays easier to remove when performing maintenance.

- * The following is the maximum number of units when installing a multi-screen using the optional TY-VK55LV2 metal fittings.
- TH-55VF2H/VF2: 4 columns. 5 rows
- TH-55I EV9: 9 columns 11 rows
- *Landscape setting only.

The rigid frame is connected, so there is no need for positioning adjustment.

Automatic adjustment by surface alignment magnets suppresses surface shifting

*For 55-inch TY-VK55LV2

Video Wall Manager Software and Auto Display Adjustment Upgrade Kit

VF2H/VF2



Panasonic's free Video Wall Manager software can be used with LCD Video Wall Series displays. With this software, you can calibrate display color using a color sensor1 (optional), adjust display settings, and control and manage data via PC. If you upgrade this software with an optional TY-VUK10 Auto Display Adjustment Upgrade Kit, you can adjust brightness and color among multiple displays automatically using a compatible camera (Nikon D5200/D5300/D5500/D5600/D7500)2.

- 1 Applicable sensors: KONICA MINOLTA (CA-210, CA-310, CA-410 [Probe CA-VP427, CA-P410, CA-P427, CA-MP410 verified as of June 30, 2020]). Datacolor (Spyder4, Spyder5, SpyderX) X-Rite (i1Pro2)
- 2 Available only with normal zoom lens: AF-S DX NIKKOR 18-55 mm f/3.5-5.6G VR, AF-S DX NIKKOR 18-140 mm f/3.5-5.6G ED VR, AF-S DX NIKKOR 18-55 mm f/3.5-5.6G VR II. AF-P DX NIKKOR 18-55 mm f/3.5-5.6G VR

■ With VF2H and TY-VUK10 connected



Auto Display Adjustment Upgrade Kit: https://panasonic.net/cns/prodisplays/products/ty-vuk10/

Panasonic display ideas for a wide range of applications

Meeting room



High image quality at 4K. Complex drawings and large amounts of text can be accurately shared.

With Panasonic, a wide range of terminals are available. Can be used immediately after installing.

Recommended models

• EQ2/CQE2 Series >> 14p~

• PressIT >> 36p~

Control room



Use a 24/7 operation display where interrupted images are simply not permitted.

Recommended models

• SQE2 Series >> 10p~

• VF/LFV Series >> 30p~

Retail shop



For attractive product displays, the 4K model is also recommended for in-store signage. The narrow bezel provides effective space utilization.

An easy-to-see angle can also be adjusted. And Content Management Software makes it easy to control signage for individual shops.

Recommended models

• EQ2/CQE2 Series >> 14p~

• Content Management Software >> 44p

Classrooms



Installation is possible at a forward inclination of up to 20 degrees to maintain legibility when mounted in high places.

Displays course materials for easy viewing even in a bright room.

35


Recommended models

• EQ2/CQE2 Series >> 14p~

PressIT

"PressIT" is a Panasonic's Wireless Presentation System that allows easy screen collaboration with just a single press of a button on a transmitter.

- 1 Easy connections with no app
- 2 Single button push a screen sharing
- 3 Multi-screen sharing up to 4

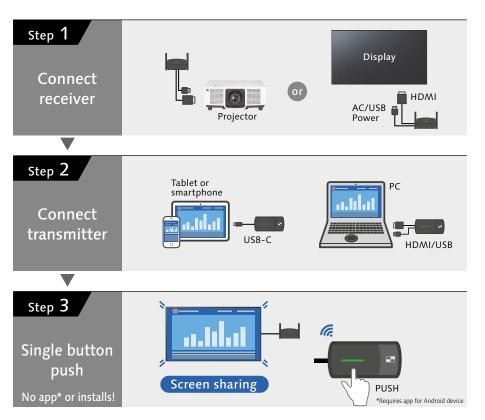

Connects to mobile devices Genuine Digital AV adaptor by Apple is required.



Presents 4 screens in Full HD [supports 4K]



High-definition video
max. resolution:
1920 x 1080 pixels, 60p

Low latency image

Connects up to 32 transmitters at once

Lock mode prevents interrupts

HDMI-CEC command compatible

Supports audio transmission

Share screen without transmitter¹

Shared from one transmitter to multiple receivers¹

1 Firmware update is required. For details, please contact your dealer

Lineup











1 Receiver (Box)

2 Receiver (Board)

3 Transmitter (HDMI/USB) 4 Transmitter (USB Type-C) 5 Transmitter case

	Basic Set		Receiver (Box)	Receiver (Board)	Transmitt	er (HDMI)	Transmitter (USB Type-C)
Model	TY-WPS1	TY-WPSC1	TY-WPR1	TY-SB01WP	TY-WP2B1	TY-WPB1	TY-WP2BC1	TY-WPBC1
Applicable product	Flat Panel Display / Projector (Panasonic and others)	PC/Tablet/ Smartphones		SQ1H/SQ2H/ SQ1/SQE2/EQ2/ BQ1 Series		PC/Tablet/Smartphone		
What's included?	1 Receiver (Box) x1 3 Transmitter (HDMI) x2 5 Transmitter case x1	1 Receiver (Box) x1 4 Transmitter (USB Type-C) x2 5 Transmitter case x1	1 Receiver (Box)	2 Receiver x1	3 Transmitter (HDMI) x2 5 Case x1	3 Transmitter (HDMI) x1	4 Transmitter (USB Type-C) x2 5 Case x1	4 Transmitter (USB Type-C) x1

Specifications

Product		Receiver (Box)	Receiver (Board)	Transmitter (HDMI)	Transmitter (USB Type-C)						
Max resolution/ I	Framerate	1920 x 1080/60p (max),	3840 x 2160/30p (max)	1920 x 1080/60p (max)							
Number of simu connections	ltaneous	3	2	-							
Number of source simultaneous on		4	1	-							
Data Rate	Wired	10/100/10	00 (Mbps)	-	-						
	Wireless	Max. 867 Mbps		Max. 433 Mbps							
Frequency band		5	GHz band 5,150 MHz - 5,25	50 MHz 36 40 44 48 Channel							
Wireless transm	ission protocol	IEEE802.	11/a/n/ac	IEEE802.11ac							
Security		WPA/WPA2/WPA3 (WPA3-Enterprize is not supported)									
Reach (Max dist transmitter and		Max. 30 m (When the line of sight/wave conditions are good)									
Terminals		HDMI/USB-A (fe	male) /RJ45(LAN)	HDMI/USB-A (male)/ USB-A (female)	USB-C (male)/ USB-A (female)						
Power		DC 5 V/2 A	12 V/0.9 A (Display Power supply)	DC 5 V/0.9 A							
Power consump	tion	10 W	10 W	4.5	5 W						
Operating	Temperature	32 °F to 95 °F (0 °C to 35 °C)	32 °F to 131 °F (0 °C to 55 °C)	32 °F to 95 °F	(0 °C to 35 °C)						
Environment	Humidity	20 % to 80 % (No condensation)	20 % to 80 % (No condensation)	20 % to 80 % (N	lo condensation)						
Dimensions (W x H x D)		4.71" x 1.03" x 3.19"/ 120 x 26 x 81 mm (Excluding antenna)	3.22" x 0.99" x 4.78"/ 82 x 25 x 122 mm (Excluding antenna)	2.00" x 0.80" x 2.86"/ 2.00" x 1.00" x 2 51 x 21 x 73 mm 51 x 26 x 73 r (Excluding cables) (Excluding cab							
Weight		Approx. 0.4 lbs / 181 g	Approx. 0.3 lbs / 125 g	Approx. 0.3 lbs / 110 g	Approx. 0.3 lbs / 110 g						

*Case: Dimensions (W x H x D: 6.0" x 1.7" x 7.8" (151.3 x 41.6 x 198.0 mm)), Weight: Approx. 0.7 lbs / 315 g

> For more information, please visit the following website. https://panasonic.net/cns/prodisplays/pressit



37



Fully Integrated Wireless Presentation System

No cables, no dongles, no set-top boxes. All you have to do is present.





Flexible BYOD for SQE2, SQ1H SQ2H and EQ2 Series: Supports Airplay, Miracast, Chromecast



4K UHD output resolution: up to 4 windows on-screen



100% data encryption: Stable and secure system based on Linux Operating System



Touch back function: control your PC directly from the interactive display



Advanced administration: Can be managed and updated remotely using browser-based administration tools.



HTML-5 page: as a screensaver for on-screen display of images, videos or as digital signage player.

PressIT360

Providing a more realistic meeting with the 360-degree camera speakerphone





360 degree camera speakerphone										
TY-CSP1										
6	Viewing angle: 360-degrees									
Camera	Shooting resolution: 2560 x 1440@30p x 4									
Microphone	7									
Speaker	Output 3 W									
Dimensions	Diameter φ63.4 mm/2.5" (excluding the pedestal part) x Height 285 mm/11.3"									

Optimal Video and Audio Transmission

TY-CSP1 is a hybrid conference terminal that enables 360-degrees horizontal shooting using four cameras and features microphones and speaker that also cover a wide range of 360 degrees. It supports natural communication with people participating in web conferences with its clear sound collection and amplification.

Simple Operation

For easy set-up and use, video, audio and power are shared to the PC via a single USB Type-C cable to save labor when preparing for a meeting. Volume and Video views can be controlled using the buttons arranged on the main unit pedestal. Operating status is instantly visible from the colored LED ring on the unit, it is possible to operate it intuitively.

Installation and Portability

With a diameter of $\phi 63.4$ mm (2.5 inches) that is easy to grip, it is possible to freely carry it around inside the office and easily carry out web conferences. Alternatively, it can be attached to a tripod or set securely fastened with security slots.

Equipped with various video modes



Dual View



Single View



Multi View



Surround View




Stable View

Panasonic Software Line-up

In order to maximize the use of professional displays, Panasonic offers a variety of software and applications (some free of charge, and others for a fee).

Content Management Software Windows

Content Management Software makes it possible to create scheduling data and media playlist on a PC and save it to one or more USB memory. Insert the media into Space Players to execute the schedule. The software reduces complexity for temporary installations or where the device is frequently moved from place to place.



Compatible Display: SQ1H Series, SQ1 and EQ2 Series

https://panasonic.net/cns/prodisplays/download/software/

Auto Display Adjustment Upgrade Kit (TY-VUK10)

Panasonic's free Video Wall Manager software can be used with LCD Video Wall Series displays. With this software, you can calibrate display color using a color sensor, adjust display settings, and control and manage data via PC.

If software is upgraded with an optional TY-VUK10 Auto Display Adjustment Upgrade Kit, brightness and color among multiple displays can be automatically calibrated using a compatible camera ((Nikon D5200/D5300/D5500/D5600/D7500)*.USB.

* Available only with normal zoom lens: AF-S DX NIKKOR 18-55 mm f/3.5-5.6G VR, AF-S DX NIKKÓR 18-140 mm f/3.5-5.6G ED VR, AF-S DX NIKKOR 18-55 mm f/3.5-5.6G VR II, AF-P DX NIKKOR 18-55 mm f/3.5-5.6G VR



schedule

For more information, please visit the PASS: https://panasonic.net/cns/prodisplays/pass/

Screen Transfer

Screen Transfer is a software that allows a computer screen to be displayed onto one or more displays of devices that are connected by wired LAN. See the User's Manual for the operating method.

* Video distribution can be with existing IP network infrastructure



Version	Ver. 2.0	Ver. 1.0
Number of device connections	Max. 64 units	Max. 8 units
Bandwidth	Approx. 10 Mbps (regardless of the number of connected devices)	Approx. 80 Mbps (when 8 devices are connected)
Auto reconnection	Yes	=
Delivery status check	Yes	=

Compatible Display: SQ1H Series, SQ1 and EQ2 Series

https://panasonic.net/cns/prodisplays/download/software/scr_transfer/

* The number of connections and functions may vary depending on the model. Please refer to the web for details.

Mobile App (iOS/Android)

Wireless Projector

This is an application that lets you send displayed screenshot, document files (PDF, PowerPoint, Excel, Word), and JPEG/PNG images saved to Android devices (tablets and smartphones) to a Panasonic wireless display over a wireless LAN (Wi-Fi), and display them. The application also lets you rotate the screen, enlarge or reduce the screen with a pinch operation, and flip through pages with a flick operation.





- Dedicated wireless apps for iOS and Android™
- Fewer stens to connect
- · Wide media compatibility and functionality

For more information, please visit the Website: https://panasonic.net/cns/prodisplays/download/software/#wireless

Multi Monitoring & Control Software Windows



This free Panasonic software offers monitoring and control of up to 2,048 projectors and professional displays over a LAN network from a single PC to simplify management and maintenance while supporting stable operation. If you also purchase Early Warning Software (ET-SWA100), it will monitor the status of projectors and displays on the intranet and inform you of errors when it detects signs of trouble. This contributes to a lighter maintenance load and reduces costs.



Features

Map Display

Image files, such as floor plans, can be loaded, and the icon for each device can be positioned by 'Drag & Drop'.



· Auto Search of the Devices to Be Registered

You can select the devices to be registered from devices automatically searched on the network.*1

· Other Features

- Monitoring of the status of each device*2

Software & App

- Execution of control commands

required to use the Early Warning function.

- Scheduling function
- Delivery of the contents list*3

Early Warning Function (ET-SWA100)

Maintenance Scheduling Suggestion*3

It is easier to plan for maintenance by predicting the approximate time for maintenance and service based on the usage monitoring.

Video Stop Detection Using a Network Camera

Images of registered projectors or displays can be monitored regularly by a supported network camera*4. You can also receive a notification when an abnormality such

as a blackout or an image freeze happens.

If you install 'Multi Monitoring & Control Software,' a free 90-day trial is automatically available.



Captured image when an abnormality happens is stored

- *1: Some devices can't be registered using the auto search function depending on the device status and network environment.
- *2: Software functionality varies depending on the model. *3: Function for supported projectors and professional displays only.
- *4: Panasonic Network camera (BB-S/DG-S/WV-S series), Panasonic PTZ camera (AW-UE70/HE40/HE130 series).

For more information about compatible displays, please visit the Website:

https://panasonic.net/cns/prodisplays/download/software/multi/dl_files/DeviceList-Multi_EN.pdf

Early Warning function License * If you install "Multi Monitoring Control Software", a free 90 day trial. For more information, please visit the PASS: https://panasonic.net/cns/prodisplays/pass

SDM Accessories

Supports the Next-Generation Intel® SDM Specification Slot Standard

The SQ1H/SQ2H/SQE2/EQ2 Series is equipped with the new Intel® SDM specification slot standard that supports 4K signals. With this expansion slot, it is possible to tailor the display and its connectivity to the application. You can easily integrate a built-in PC and add various interfaces.



Wolfvision Cynap Pure -integrated Wireless Presentation System

No Cable. No Dongle. No Set-Top Box. Just Present.

Panasonic fully integrates WolfVision's Cynap Pure powerful BYOD wireless presentation solution into its SQ1H/SQ2H/SQE2/EQ2 displays using the Intel® Smart Display Module slot. The unified collaboration system is the perfect, integrated solution for meeting rooms, classrooms and huddle spaces with a discrete design, no cabling and no need for additional applications, software and driver downloads or dongles and set-top boxes. Installation inside the screen is straightforward, and units can be managed and updated remotely using browser-based administration tools.









Key Features

- · Screen Mirroring using Miracast technology. Supports iOS, iPadOS, Android, Windows, Chrome OS, macOS.
- · 4K output resolution.
- Up to 4 window on-screen display.

- · Touch back support, enables remote control of laptops while working at a shared multi-touch screen.
- Also compatible with SDM enables interactive touchscreens from Panasonic for easy control by touch and for on-screen annotations

Panasonic Wireless Presentation System

Efficient Meeting Room Collaboration

The System allows up to easily switch between up to four presenters to display visual and audio content on their Panasonic displays or projectors removing the need for cables. Users simply connect the transmitter to any device and press the button to share content on the display or through a projector.

It is also possible to share from mobile devices with an app. Two types of receivers are possible: The SDM receiver is designed to perfectly fit inside the Intel® SDM expansion slot of the Panasonic SQ1H/SQ2H/SQE2/EQ2 displays. For Panasonic displays and projectors without an SDM slot for the receiver, a set-top box version of the system can be connected to the device by cable.



Receiver TY-SB01WP





- · Two versions: basic with the set-top-box or cable-less with the SDM-S board receiver.
- Plug and Play: no dedicated software installation is necessary for the PC.
- · Audio and FHD Video over Wireless transmission, IEEE802,11ac compliant,



12G SDI - SDM Board

Perfect for Broadcasting Environment

Just by plugging the SDI terminal board into its Intel® SDM slot you can directly connect the SQ2H and EQ2 series displays to a Pro AV source, saving the need for optional equipment like converters that normally bring latency into the production chain. You can transmit uncompressed, unencrypted digital video signals over up to 100m with a single BNC cable, in environments where cabling could be unplugged or tripped over.







Key Features

- TY-SB01QS- compatible with 3G-SDI,12G SDI, HD-SDI audio and video formats.
- · To be plugged inside professional displays with Intel SDM slot.
- Maximum Transmission distance 100m with BNC cable.







Optional Accessories			TH-75SQ1HW	TH-98SQ2HW	TH-86SQ2HW	тн-758Q2нW	TH-65SQ2HW	ТН-558Q2HW	TH-50SQ2HW	ТН-43SQ2HW
Screen Size (inch)		86	75	98	86	75	65	55	50	43
FUNCTION BOARD										
12G-SDI Terminal Board	TY-SB01QS	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
3G-SDI Terminal Board	TY-SB01SS	Yes1	Yes1	-	-	-	-	-	-	-
Wireless Presentation System Receiver Board	TY-SB01WP	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
DIGITAL LINK Board	TY-SB01DL	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
MOUNTING OPTIONS										
Pedestal	TY-ST75PE9	-	-	-	-	Yes	Yes	-	-	-
	TY-ST55PE9	-	-	-	-	-	-	Yes	-	-
	TY-ST43PE9	-	-	-	-	-	-	-	Yes	Yes
	TY-ST43PE8	-	-	-	-	-	-	-	-	-
	TY-ST32PE2	-	-	-	-	-	-	-	-	-
Wall-hanging Bracket	TY-WK98PV1	Yes	Yes	Yes	Yes	Yes	Yes	-	-	-
Installation Mount (Landscape setting only)	TY-VK55LV2	-	-	-	-	-	-	-	-	-
Pitch for Wall Hanging	800 x 500 (M8)	-	-	-	-	-	-	-	-	-
(VESA compliant models)	800 x 400 (M8)	Yes	Yes	Yes	-	-	-	-	-	-
	600 x 500 (M8)	-	-	-	-	-	-	-	-	-
	600 x 400 (M8)	-	-	-	Yes	Yes	-	-	-	-
	600 x 400 (M6)	-	-	-	-	-	-	-	-	-
	400 x 400 (M8)	-	-	-	-	-	Yes	-	-	-
	400 x 400 (M6)	-	-	-	-	-	-	Yes	Yes	-
	400 x 200 (M6)	-	-	-	-	-	-	-	-	-
	200 x 200 (M6)	-	-	-	-	-	-	-	-	Yes
	100 x 100 (M4)	-	-	-	-	-	-	-	-	-
OTHERS										
DIGITAL LINK Switcher	ET-YFB200G	Yes	Yes	-	-	-	-	-	-	-
Digital Interface Box	ET-YFB100G	-	-	-	-	-	-	-	-	-
SOFTWARE										
Content Management Software (free)		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Screen Transfer (free)		Yes ²	Yes ²	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Multi Monitoring & Control Software Compatib		Yes	Yes	Yes	Yes	Yes	Yes	 Yes	Yes	Yes
Early Warning Software Compatible (ET-SWA10	00 Series) ⁴	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Video Wall Manager (free)		Yes	Yes	Yes	Yes	Yes	Yes	 Yes	Yes	Yes
Auto Display Adjustment Upgrade Kit (TY-VUK	10)	-	-	-	-	-	-	-	-	-
The specification has a case to change without notice.							 2: The Softv	vare Main \	/ersion 1.10	

High Brightness

Standard

2: The Software Main Version 1.10 or later is required. 3: The Software Main Version 4.40 or later is required.

Standard

Panasonic Software Line-up

Content Management Software

Content Management Software makes it possible to create scheduling data and media playlist on a PC. The software reduces complexity for temporary installations or where the device is frequently moved from place to place.



on PC

2. Output to USB media 3. Insert device into display to execute schedule

Compatible Display: SQ1H Series, SQ2H Series, EQ2 Series and BQ1 Series

Whiteboard Software Windows 💻



This simple software is easy to operate. Requiring no PC installation, it can be started and used from external memory. Switching to a convenient, simple menu when using the Remote Pointer is also supported.



Compatible Displays: BQ1 Series

Auto Display Adjustment Upgrade Kit (TY-VUK10)

Panasonic's free Video Wall Manager software can be used with LCD Video Wall Series displays. With this software, you can calibrate display color using a color sensor, adjust display settings, and control and manage data via PC. If software is upgraded with an optional TY-VUK10 Auto Display Adjustment Upgrade Kit, brightness and color among multiple displays can be automatically calibrated using a compatible camera (Nikon D5200/D5300/D5500/D5600/D7500)*.

* Available only with normal zoom lens: AF-S DX NIKKOR 18-55 mm f/3.5-5.6G VR, AF-S DX NIKKOR 18-140 mm f/3.5-5.6G ED VR, AF-S DX NIKKOR 18-55 mm f/3.5-5.6G VR II, AF-P DX NIKKOR 18-55 mm f/3.5-5.6G VR





For more information, please visit the PASS: https://panasonic.net/cns/prodisplays/pass/

For information that is not included on this page, please visit the following website: https://panasonic.net/cns/prodisplays/index.html

^{1:} This terminal board is supported only when the main software version of the display is 3.5000 or later and the sub software version of the display is 03.50 or later. For update, please contact your Panasonic dealer.

^{4:} The part number suffix may differ depending on the



Standard Standard TH-86SQE2W TH-98SQE2W TH-75SQE2W TH-65SQE2W TH-55SQE2W TH-50SQE2W TH-43SQE2W TH-86EQ2W TH-75EQ2W TH-65EQ2W TH-55EQ2W TH-50EQ2W TH-43EQ2W Optional Accessories FUNCTION BOARD 12G-SDI Terminal Board TY-SB01QS Yes 3G-SDI Terminal Board TY-SB01SS Yes Yes Yes Yes Yes Yes Wireless Presentation System Receiver Board TY-SB01WP Yes DIGITAL LINK Board TY-SB01DL Yes MOUNTING OPTIONS Pedestal TY-ST75PE9 Yes Yes TY-ST55PE9 Yes TY-ST43PE9 Yes Yes TY-ST43PE8 _ TY-ST32PE2 Wall-hanging Bracket TY-WK98PV1 _ Yes Yes Yes Installation Mount (Landscape setting only) TY-VK55LV2 -Pitch for Wall Hanging 800 x 500 (M8) (VESA compliant models) 800 x 400 (M8) Yes 600 x 500 (M8) 600 x 400 (M8) Yes Yes Yes Yes 600 x 400 (M6) Yes Yes 400 x 400 (M8) 400 x 400 (M6) Yes Yes Yes 400 x 200 (M6) 200 x 200 (M6) Yes Yes Yes 100 x 100 (M4) ET-YFB200G DIGITAL LINK Switcher -ET-YFB100G Digital Interface Box Content Management Software (free) Yes Yes Yes Yes Screen Transfer (free) Yes Yes Yes Yes Yes Yes Multi Monitoring & Control Software Compatible (free) Yes Early Warning Software Compatible (ET-SWA100 Series)4 Yes Video Wall Manager (free) Auto Display Adjustment Upgrade Kit (TY-VUK10)

Panasonic Software Line-up

Multi Monitoring & Control Software



This free Panasonic software offers monitoring and control of up to 2,048 projectors and professional displays over a LAN network from a single PC to simplify management and maintenance while supporting stable operation. If you also purchase Early Warning Software (ET-SWA100), it will monitor the status of projectors and displays on the intranet and inform you of errors when it detects signs of trouble. This contributes to a lighter maintenance load and reduces costs.



- * Software function support varies by model.
- * Multi Monitoring & Control Software Ver. 2.0 or higher is required to use the Early Warning function.

Early Warning Function (ET-SWA100)

- . Maintenance Scheduling Suggestion
- Video Stop Detection Using a Network Camera

Early Warning function License

* If you install "Multi Monitoring Control Software", a free 90 day trial. For more information, please visit the PASS: https://panasonic.net/cns/prodisplays/pass

If you install 'Multi Monitoring & Control Software,' a free 90-day trial is automatically available.



Captured image when an abnormality happens is stored

For information that is not included on this page, please visit the following website: https://panasonic.net/cns/prodisplays/index.html

The specification has a case to change without notice.

^{1:} The part number suffix may differ depending on the license type.

49



Entry Video Wall TH-86CQE2W TH-65CQE2W TH-55CQE2W TH-43CQE2W TH-98CQE2W TH-75CQE2W TH-50CQE2W TH-55VF2HW TH-55LFV9W TH-55VF2W Optional Accessories FUNCTION BOARD TY-SB01QS 12G-SDI Terminal Board 3G-SDI Terminal Board TY-SB01SS Wireless Presentation System Receiver Board TY-SB01WP TY-SB01DL DIGITAL LINK Board MOUNTING OPTIONS Pedestal TY-ST75PE9 TY-ST55PE9 TY-ST43PE9 TY-ST43PE8 _ TY-ST32PE2 Wall-hanging Bracket TY-WK98PV1 -Installation Mount (Landscape setting only) TY-VK55LV2 -Yes Yes Yes Pitch for Wall Hanging 800 x 500 (M8) (VESA compliant models) 800 x 400 (M8) Yes 600 x 500 (M8) 600 x 400 (M8) Yes Yes 600 x 400 (M6) Yes 400 x 400 (M8) -400 x 400 (M6) Yes Yes Yes Yes 400 x 200 (M6) 200 x 200 (M6) Yes Yes 100 x 100 (M4) OTHERS DIGITAL LINK Switcher ET-YFB200G -Digital Interface Box ET-YFB100G Content Management Software (free) Yes Yes Screen Transfer (free) Multi Monitoring & Control Software Compatible (free) Yes Early Warning Software Compatible (ET-SWA100 Series)4 Yes Video Wall Manager (free) Yes Yes Yes Auto Display Adjustment Upgrade Kit (TY-VUK10) Yes Yes Yes

The specification has a case to change without notice.

1: The availability varies depending on the country. 2: The part number suffix may differ depending on the license type.

Panasonic Software Line-up

Screen Transfer

Screen Transfer is a software that allows a computer screen to be displayed onto one or more displays of devices that are connected by wired LAN. See the User's Manual for the operating method.

Main conditions when using Screen Transfer software As verification is required in advance, please confirm the following conditions and contact your sales representative with regard to details.

1. Delivering to displays within the same network.

resolution will be up to 1920 ×1080 pixels.

- 2. Using a wired LAN connection between the PC and display instead of
- 3. Meeting the operating environment of the PC (check the website for details.) Even if your displays supports 4K images, the delivered image

Version	Ver. 2.0	Ver. 1.0
Number of device connections	Max. 64 units	Max. 8 units
Bandwidth	Approx. 10 Mbps (regardless of the number of connected devices)	Approx. 80 Mbps (when 8 devices are connected)
Auto reconnection	Yes	-
Delivery status check	Yes	-

Compatible Display: SQ1H Series, SQ2H Series, BQ1 Series, EQ2 Series https://panasonic.net/cns/prodisplays/download/software/scr transfer/

Wired LAN

^{3:} The Software Main Version 2.10 or later is required.

^{*} The number of connections and functions may vary depending on the model. Please refer to the web for details.

Name	TH-55SQ2HW	TH-50SQ2HW	ТН-43SQ2HW
	55		≐
DIGITAL LINK Yes Yes Yes Yes Yes Yes SLOT Intel® SDM Standard Operating Time (h/day) 24 24 24 24 24 24 24 Protective Glass		50	43
SLOT Intel® SDM Standard Intel® SDM Standard Operating Time (h/day) 24 24 24 24 24 24 24 2	Yes	Yes	Yes
Operating Time (h/day) 24	Intel®	SDM Star	ndard
Protective Glass	24	24	24
Ū Tarak Osantina	-	-	-
Touch Operation	-	-	-
Wireless Function Yes Yes Yes Yes	Yes	Yes	Yes
Color Management 12-axis 12-axis		12-axis	-
	Yes	Yes	Yes
Dynamic Backlight Yes Yes Yes Yes Yes Yes	Yes	Yes	Yes
Color Enhancement Yes Yes Yes Yes Yes Yes Yes Dynamic Backlight Yes	-	-	-
	-	-	-
Frame Creation	Yes	Yes	Yes
≦ Local Dimming Yes Yes	-	-	-
Refine Enhancer Yes Yes Yes Yes Yes Yes	Yes	Yes	Yes
Failover/Failback Yes Yes Yes Yes Yes Yes	Yes	Yes	Yes
Input Search/No Signal Auto Switch Setting/Input Signal Search Yes Yes Yes Yes Yes Yes	Yes	Yes	Yes
Audio Input Select (Switching) Yes Yes	-	-	-
Cisco Webex Certified	-	-	-
	Yes	Yes	Yes
Memory Viewer/Auto Play Yes Yes Yes Yes Yes Yes	Yes	Yes	Yes
PJLink™ Protocol Yes Yes Yes Yes Yes Yes	Yes	Yes	Yes
Power Management Mode/Eco Mode Yes Yes Yes Yes Yes Yes Yes	Yes	Yes	Yes
LAN Control (Network Control) Yes Y	Yes	Yes	Yes
Serial ID Control (Function) Yes Yes	-	-	-
USB Media Player Yes Yes Yes Yes Yes Yes	Yes	Yes	Yes
Web Browser Control Yes Yes Yes Yes Yes Yes Yes	Yes	Yes	Yes
Auto Setup Yes Yes	-	-	-
Built-in Whiteboard	-		-
Conference Audio Mode Yes Yes	-	-	-
USB/LAN USB/LAN	أدروا	USB/LAN	:
Data Cloning	Yes	Yes	Yes
Multi Input Display Yes Yes Yes Yes Yes Yes	Yes	Yes	Yes
No Activity Power Off Yes Yes Yes Yes Yes Yes Yes	Yes	Yes	Yes
Off Timer Setting Yes Yes Yes Yes Yes Yes	Yes	Yes	Yes
Power on Screen Delay Yes Yes Yes Yes Yes Yes	Yes	Yes	Yes
Set up Timer Yes Yes Yes Yes Yes Yes Yes	Yes	Yes	Yes
Startup Image Settings/No signal image settings Yes Yes Yes Yes Yes Yes	Yes	Yes	Yes
	-	-	-
Daisy Chain Connection	Yes	Yes	Yes
Multi Screen (Multi Display Setting) ⁸ Yes Yes Yes Yes Yes Yes Yes	Yes	Yes	Yes
Portrait Yes Yes Yes Yes Yes Yes	Yes	Yes	Yes
Portrait Zoom Mode Yes Yes Yes Yes Yes Yes	Yes	Yes	Yes
USB Memory Network Setting Yes Yes	-	-	-
	Yes	Yes	Yes
Crestron Connected ™ Yes Yes	Yes	Yes	Yes
Extron XTP Yes Yes Yes Yes Yes Yes	Yes	Yes	Yes

Note:The specifications may vary depending on the model, even for the same function. For details, see the operating instructions of each model.

^{1:} Long Reach Mode compatible. 2: Multi Dynamic Backlight 3: Local Dimming on LFV9 Series is always set.
4: This function is compatible with the Software Main Version 2.2000 or later. Please contact your sales representative with regard to details.

^{5:} The playable application format, GUI, and operation procedure for the SQE1, CQE1 Series' Media Player function areas different from of other models.

^{6:} This function on the 98/86-inch models is compatible with the Software Main Version 4.0000 or later.
7: The number of units that can be set as a group varies depending on the model. For details, see the operating instructions of each model
8: There are restrictions on the input signal and 4-Input Multi Display function. 3G-SDI input and 4K images are not supported by the 4-Input Multi Display function. For details, see the operating instructions of each model.

9: These functions on the 98/86-inch models are compatible with the Software Main Version 3.0000 or later. Please contact your sales representative with

regard to details.

Features A				Stan	dard			Standard							
Story	Features	TH-98SQE2W	TH-86SQE2W	TH-75SQE2W	TH-65SQE2W	TH-55SQE2W	TH-50SQE2W		TH-43SQE2W	TH-86EQ2W	TH-75EQ2W	TH-65EQ2W	TH-55EQ2W	TH-50EQ2W	TH-43EQ2W
Solid	Size (inch)	98	86	75	65	55	50		43	86	75	65	55	50	43
Color Management	DIGITAL LINK	-	-	-	-	-	-		-	-	-	-	-	-	-
Color Management	SLOT			Intel® SD∧	A Standard				Intel® SDM Standard			Intel® SDA	1 Standard		
Color Management	Operating Time (h/day)	24	24	24	24	24	24		24	18	18	18	18	18	18
Color Management	Protective Glass	-	-	-	-	-	-		-	-	-	-	-	-	-
Color Management	Touch Operation	-	-	-	-	-	-		-	-	-	-	-	-	-
Part		Yes	Yes	Yes	Yes	Yes	Yes		Yes	-	-	-	-	-	-
Refine Enhancer	Color Management	-	-	-	-	-	-		-			6-a	xis		
Refine Enhancer	Color Enhancement	-	-	-	-	-	-		-	Yes	Yes	Yes	Yes	Yes	Yes
Refine Enhancer	Dynamic Backlight	Yes	Yes	Yes	Yes	Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes
Refine Enhancer	Dynamic Contrast	Yes	Yes	Yes	Yes	Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes
Refine Enhancer	Frame Creation	-	-	-	-	-	-		-	-	-	-	-	-	-
Refine Enhancer	Gradation Smoother	-	-	-	-	-	-		-	Yes	Yes	Yes	Yes	Yes	Yes
Figurest Figurest	≥ Local Dimming	Yes	-	-	-	-	-		-	Yes	Yes	-	-	-	-
Part	Refine Enhancer	-	-	-	-	-	-		-	Yes	Yes	Yes	Yes	Yes	Yes
Audio Input Select (Switching)	Failover/Failback	-	-	-	-	-	-		-	Yes	Yes	Yes	Yes	Yes	Yes
Casco Webex Certified	Input Search/No Signal Auto Switch Setting/Input Signal Search	Yes	Yes	Yes	Yes	Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes
Amongon New ork Control	Audio Input Select (Switching)	-	-	-	-	-	-		-	Yes	Yes	Yes	Yes	Yes	Yes
Memory Viewer/Auto Play Yest Ye	Cisco Webex Certified	-	-	-	-	-	-		-	-	-	-	-	-	-
USB Media Player Web Browser Control	≥ LAN Control (Network Control)	Yes	Yes	Yes	Yes	Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes
USB Media Player Web Browser Control	Memory Viewer/Auto Play	Yes ⁴		Yes ⁴	Yes	Yes	Yes	Yes	Yes	Yes					
USB Media Player Web Browser Control	PJLink™ Protocol	Yes	Yes	Yes	Yes	Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes
USB Media Player Web Browser Control	Power Management Mode/Eco Mode	Yes	Yes	Yes	Yes	Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes
USB Media Player Web Browser Control	Remote ID Control (Function)	-	-	-	-	-	-		-	Yes	Yes	Yes	Yes	Yes	Yes
Web Browser Control	Serial ID Control (Function)	Yes	Yes	Yes	Yes	Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes
Auto Setup Built-in Whiteboard	USB Media Player	Yes	Yes	Yes	Yes	Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes
Built-in Whiteboard	Web Browser Control	-	-	-	-	-	-		-	Yes	Yes	Yes	Yes	Yes	Yes
Conference Audio Mode	Auto Setup	Yes	Yes	Yes	Yes	Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes
Data Cloning HDMI CEC	Built-in Whiteboard	-	-	-	-	-	-		-	-	-	-	-	-	-
Power on Screen Delay TBD TBD		-	-	-	-	-	-		-	Yes	Yes	Yes	Yes	Yes	Yes
Power on Screen Delay TBD TBD	Data Cloning			U	SB				USB			USB/	LAN .		
Power on Screen Delay TBD TBD	HDMI CEC	Yes	Yes	Yes	Yes	Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes
Power on Screen Delay TBD TBD	Multi Input Display ⁷	-	-	-	-	-	-		-	-	-	-	-	-	-
Power on Screen Delay TBD TBD	No Activity Power Off	Yes	Yes	Yes	Yes	Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes
Power on Screen Delay TBD TBD	Off Timer Setting	-	-	-	-	-	-		-	Yes	Yes	Yes	Yes	Yes	Yes
Startup Image Settings/No signal image settings Yes Y	Power on Screen Delay	TBD	TBD	TBD	TBD	TBD	TBD		TBD	Yes	Yes	Yes	Yes	Yes	Yes
Daisy Chain Connection	Set up Timer	Yes	Yes	Yes	Yes	Yes	Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes
Daisy Chain Connection	Startup Image Settings/No signal image settings	-	-	-	-	-	-		-	Yes	Yes	Yes	Yes	Yes	Yes
Fan-less Design Yes Yes		-	-	-	-	-	-		-			Yes (II	R only)		
Crestron Connected ™	Pan-less Design	Yes	Yes	Yes	Yes	Yes	Yes		Yes	Yes	Yes			Yes	Yes
Crestron Connected ™	Multi Screen (Multi Display Setting)8	Yes	Yes	Yes	Yes	Yes	Yes		Yes		Yes	Yes	Yes	Yes	Yes
Crestron Connected ™	Portrait			:	:		:		:		:	Yes	Yes	Yes	Yes
Crestron Connected ™	Portrait Zoom Mode	-	-	:	-		-		-	Yes	Yes	Yes	Yes	Yes	:
Crestron Connected ™ - - - - - - Yes	SB Memory Network Setting	-	-	-	-	-	-		-				Yes	Yes	Yes
AMX.D.D		-	-	-	-	-	-		-	Yes	Yes	Yes	Yes	Yes	Yes
S Extron XTP	₩ AMX.D.D.	-	-	-	-	-	-		-			Yes	Yes	Yes	Yes
	Extron XTP	-	-	-	-	-	-		-	-	-	-	-	-	-

^{1:} Long Reach Mode compatible. 2: Multi Dynamic Backlight 3: Local Dimming on LFV9 Series is always set. 4:These functions on the 98/86-inch models are compatible with the Software Main Version 4.0000 or later.

Note:The specifications may vary depending on the model, even for the same function.

For details, see the operating instructions of each model.

^{5:} The playable application format, GUI, and operation procedure for the SQE1 Series' Media Player function areas different from of other models.

^{6:} Some files cannot be played back even if they are in the supported format. Regarding restrictions, see the operating instructions.

7: The number of units that can be set as a group varies depending on the model. For details, see the operating instructions of each model

8: There are restrictions on the input signal and 4-Input Multi Display function. 3G-SDI input and 4K images are not supported by the 4-Input Multi Display function. For details, see the operating instructions of each model.

^{9:} The number of units that can be set as a group varies depending on the model. For details, see the operating instructions of each model

				Video Wall							
	Features	TH-98CQE2W	TH-86CQE2W	TH-75CQE2W	TH-65CQE2W	TH-55CQE2W	TH-50CQE2W	TH-43CQE2W	TH-55VF2HW	TH-55VF2W	TH-55LFV9W
Siz		98									
S	DIGITAL LINK	-	-	-	-	-	-	-	Yes	Yes	-
ō	SLOT	-	-	-	-	-	-	-	-	-	-
SPECIFICATIONS	Operating Time (h/day)	24	16	16	16	16	16	16	24	24	24
吕	Protective Glass	-	-	-	-	-	-	-	-	-	-
ECI	Touch Operation	-	-	-	-	-	-	-	-	-	-
SP	Wireless Function	Yes	-	-	-						
	Color Management	-	-	-	-	-	-	-	-	-	-
≱	Color Enhancement	-	-	-	-	-	-	-	Yes	Yes	Yes
QUALITY	Dynamic Backlight	-	-	-	-	-	-	-	Yes ²	Yes ²	-
Ž	Dynamic Contrast	-	-	-	-	-	-	-	Yes	Yes	Yes
	Frame Creation	-	-	-	-	-	-	-	-	-	-
IMAGE	Gradation Smoother	-	-	-	-	-	-	-	-	-	-
≦	Local Dimming	-	-	-	-	-	-	-	Yes	Yes	Yes ³
	Refine Enhancer	-	-	-	-	-	-	-	Yes	Yes	-
	Failover/Failback	-	-	-	-	-	-	-	Yes	Yes	Yes
RELIAE	Input Search/No Signal Auto Switch Setting/Input Signal Search	-	-	-	-	-	-	-	Yes	Yes	Yes
	Audio Input Select (Switching)	-	-	-	-	-	-	-	Yes	Yes	-
	Cisco Webex Certified	-	-	-	-	-	-	-	-	-	-
≥	LAN Control (Network Control)	Yes	Yes	Yes							
	Memory Viewer/Auto Play	Yes	-	-	-						
AB	PJLink™ Protocol	Yes	Yes	Yes							
EXPANDABILITY	Power Management Mode/Eco Mode	-	-	-	-	-	-	-	Yes	Yes	Yes
PA	Remote ID Control (Function)	-	-	-	-	-	-	-	Yes	Yes	-
X	Serial ID Control (Function)	-	-	-	-	-	-	-	Yes	Yes	Yes
	USB Media Player	Yes	Yes	-							
	Web Browser Control	-	-	-	-	-	-	-	Yes	Yes	Yes
	Auto Setup	-	-	-	-	-	-	-	Yes	Yes	-
	Built-in Whiteboard	-	-	-	-	-	-	-	-	-	-
	Conference Audio Mode	-	-	-	-	-	-	-	-	-	-
IENCE	Data Cloning	-	-	-	-	-	-	-	USB/LAN	USB/LAN	-
	HDMI CEC	-	-	-	-	-	-	-	-	-	-
교	Multi Input Display ⁷	-	-	-	-	-	-	-	-	-	-
CONV	No Activity Power Off	-	-	-	-	-	-	-	Yes	Yes	-
8	Off Timer Setting	-	-	-	-	-	-	-	Yes	Yes	Yes
	Power on Screen Delay	-	-	-	-	-	-	-	Yes	Yes	Yes
	Set up Timer	-	-	-	-	-	-	-	Yes	Yes	-
	Startup Image Settings/No signal image settings	-	-	-	-	-	-	-	Yes	Yes	-
Z	Daisy Chain Connection	-	-	-	-	-	-	-	Yes	Yes	Yes
2	Fan-less Design	-	-	-	-	-	-	-	Yes	Yes	-
STALLATION	Multi Screen (Multi Display Setting)8	-	-	-	-	-	-	-	Yes	Yes	Yes
AL	Portrait	Yes	Yes	Yes							
TSI	Portrait Zoom Mode	-	-	-	-	-	-	-	-	-	-
=	USB Memory Network Setting	-	-	-	-	-	-	-	Yes	Yes	-
103	Crestron Connected ™	-	-	-	-	-	-	-	Yes	Yes	-
CONTROL	AMX.D.D.	-	-	-	-	-	-	-	Yes	Yes	-
00	Extron XTP	-	-	-	-	-	-	-	Yes	Yes	-

Note:The specifications may vary depending on the model, even for the same function. For details, see the operating instructions of each model.

^{1:} Long Reach Mode compatible. 2: Multi Dynamic Backlight 3: Local Dimming on LFV9 Series is always set.
4: This function is compatible with the Software Main Version 2.2000 or later. Please contact your sales representative with regard to details.

^{5:} The playable application format, GUI, and operation procedure for the SQE1, CQE1 Series' Media Player function areas different from of other models.

^{6:} This function on the 98/86-inch models is compatible with the Software Main Version 4.0000 or later.
7: The number of units that can be set as a group varies depending on the model. For details, see the operating instructions of each model
8: There are restrictions on the input signal and 4-Input Multi Display function. 3G-SDI input and 4K images are not supported by the 4-Input Multi Display

function. For details, see the operating instructions of each model.

9: These functions on the 98/86-inch models are compatible with the Software Main Version 3.0000 or later. Please contact your sales representative with regard to details.



Panasonic Connect Europe GmbH Hagenauer Strasse 43 65203 Wiesbaden https://eu.connect.panasonic.com/displays